

31

FIELD BOOK

740

TABLE FOR REDUCING PERCHES TO FEET AND INCHES.

PERCH	FEET.	PERCH.	FEET.	PERCH.	FEET.	PERCH.	FEET.	PERCH.	FEET.	PERCH.	FEET.
1	16.6 in.	21	3.46.6 in.	41	6.76.6 in.	61	10.06.6 in.	81	13.36.6		
2	33.0	22	3.03.0	42	6.93.0	62	10.23.0	82	13.53.0		
3	49.6	23	3.79.6	43	7.09.6	63	10.39.6	83	13.60.6		
4	66.0	24	3.96.0	44	7.26.0	64	10.56.0	84	13.66.6		
5	82.6	25	4.12.6	45	7.42.6	65	10.72.6	85	13.82.6		
6	99.0	26	4.29.0	46	7.59.0	66	10.89.0	86	13.99.0		
7	1.15.6	27	4.45.6	47	7.75.6	67	11.05.6	87	14.15.6		
8	1.32.0	28	4.62.0	48	7.92.0	68	11.22.0	88	14.32.0		
9	1.48.6	29	4.78.6	49	8.08.6	69	11.38.6	89	14.48.6		
10	1.65.0	30	4.95.0	50	8.25.0	70	11.55.0	90	14.65.0		
11	1.81.6	31	5.11.6	51	8.41.6	71	11.71.6	91	14.81.6		
12	1.98.0	32	5.28.0	52	8.58.0	72	11.88.0	92	14.98.0		
13	2.14.6	33	5.44.6	53	8.74.6	73	12.04.6	93	15.14.6		
14	2.31.0	34	5.61.0	54	8.91.0	74	12.21.0	94	15.31.0		
15	2.47.6	35	5.77.6	55	9.07.6	75	12.37.6	95	15.47.6		
16	2.64.0	36	5.94.0	56	9.24.0	76	12.54.0	96	15.64.0		
17	2.80.6	37	6.10.6	57	9.40.6	77	12.70.6	97	15.80.6		
18	2.97.0	38	6.27.0	58	9.57.0	78	12.87.0	98	15.97.0		
19	3.13.6	39	6.43.6	59	9.73.6	79	13.03.6	99	16.13.6		
20	3.30.0	40	6.60.0	60	9.90.0	80	13.20.0	100	16.30.0		

PLEASE RETURN TO
 GEauga COUNTY ENGINEER
 COURT HOUSE
 CHARDON, O.
 PHONE 250-X

B. K. ELLIOTT COMPANY, PITTSBURG, PA.
 DRAWING MATERIALS AND SURVEYING INSTRUMENTS

INDEX NEXT Pg 3

CHILLICOTHE ROAD
 Sec. B.
 RUSSELL TWP.
 1921

PROPERTY OF GEauga COUNTY SURVEYOR

31

CHILLIGOTHE RD. RUSSELL page

Index

Line & Transit notes 3-15

Topography 17-28

Relocation Sta 90+47 to

107+98

29

Stadia & Inspectors records 30-49

TRANSIT NOTES

Sta Angle Bearing

11

10

9

8

7

6

5

4


3

2

1

0 Δ 0°-0'

M. 0-0' W.

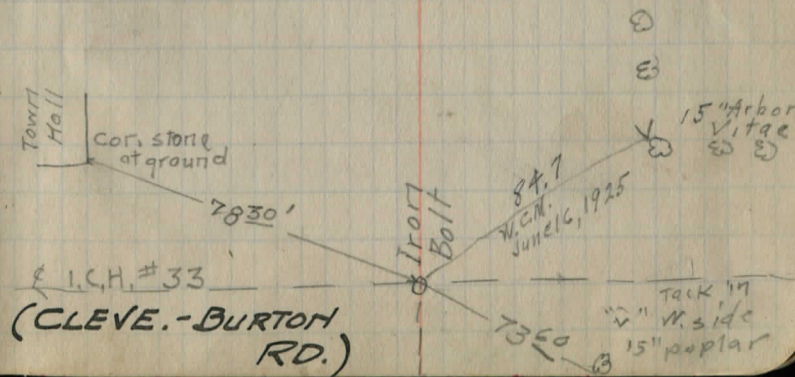

Sta. Angle Bearing

21

+56.3 = P.T.

19

+01.1 Δ 22°-00' Rt.

18

$\Delta = 22^\circ - 0'$
 $D = 7^\circ - 0'$
 $P.I. = 18 + 01.1$
 $T. = 1 \quad 59.1$
 $\checkmark P.C. = 16 + 42.0$
 $L = 3 \quad 14.3$
 $P.T. = 19 + 56.3$
 $E = 15.3$

17

+42° = P.C.


16

15

14

13

12

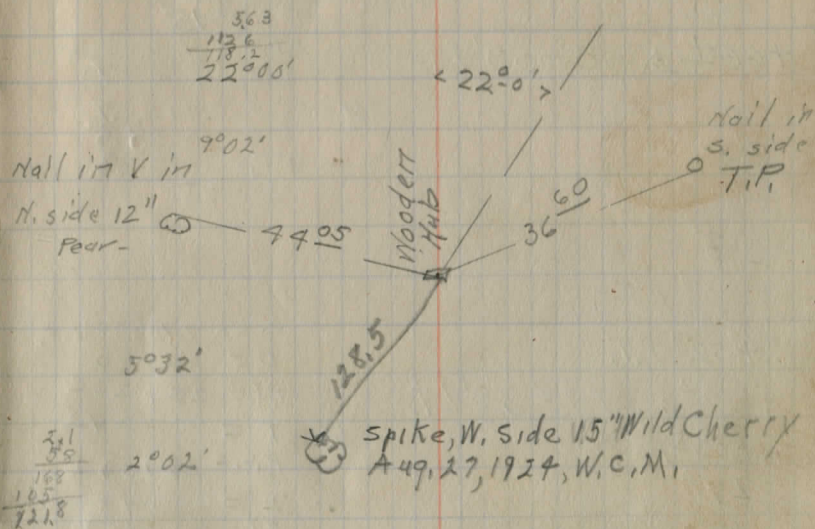

Sta Angle Bearing

+652 P.T.

30

29

+664 Δ 8°-58' Lt.

about 912 ft.

28

27

+667 P.C.

+523 P.T.

+28° Δ 14°-38' Lt.

+035 P.C.

26

+205 P.T.

25

+843 Δ 6°-36' Rt.

175 P.C.

24

23

22

$\Delta = 82^{\circ} 58' \text{ Lt}$
 $D = 2^{\circ} - 15'$
 $P.I. = 28 + 667$
 $T = 1997$
 $PC = 26 + 667$
 $L = 3985$
 $P.T. = 30 + 652$
 $E = 78$

$\Delta = 142^{\circ} 38' \text{ Lt}$
 $D = 30 - 00$
 $P.I. = 26 + 280$
 $T = 245$
 $PC = 26 + 035$
 $L = 483$
 $P.T. = 26 + 523$
 $E = 155$

$\Delta = 62^{\circ} 36'$
 $D = 80 - 00$
 $P.I. = 24 + 843$
 $T = 362$
 $PC = 24 + 175$
 $L = 732$
 $P.T. = 25 + 205$
 $E = 100$


Fair fine mud

Hunter
Grove
Thompson

5

See Relocation
on Page 33

Tacked stake 1st
N. gate post

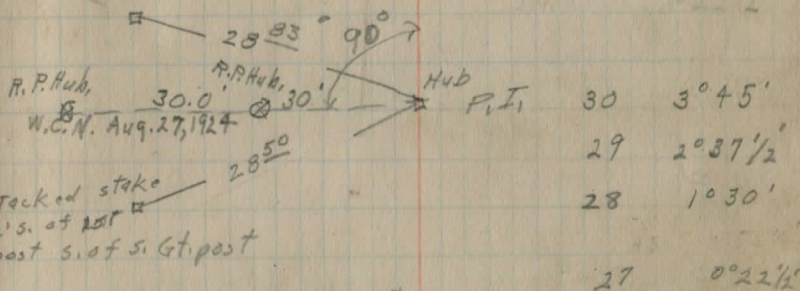


Tacked stake
2' s. of 1st
post s. of S. Gt. post

2 Tacks s. side
w. cherry

25' Lt. of Δ

end to end of floor = 44'

Tack in V in
S.E. side of
18' Elm

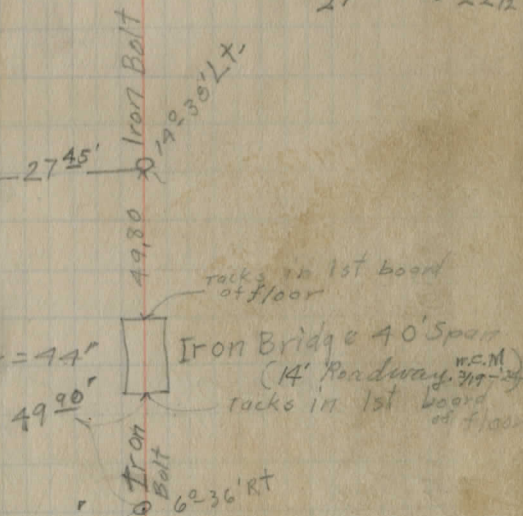

Sta. Angle Bearing

42

41

40

39

38

37

36

35

$103^{\circ} \Delta 0^{\circ}-0'$

34

33

32

31

N. $4^{\circ}-0'$ E.

Tacked Hub
1' N. of post

27.05

Tacked Hub
1ft S. of post

27.54

Iron bolt

E

5

Sta Angle Bearing

53

52

51

50

49

48

47

46

45

$\pm 28^{\circ} \Delta 0^{\circ} 0'$

44

43

SPIKE, N.E. Cor.

Fack in S.E.
side 2" Maple (Grubbed out)

24 ⁰⁰

Center Post in Concrete

30.0

w.c.m. June 2, 1925

50 ²⁵

B.M.
S.E. root

Iron bolt

Sta Angle Bearing

65

64

63

62

61

60

59

+63² Δ 0°-18' Rt.


58

57

56

55

54

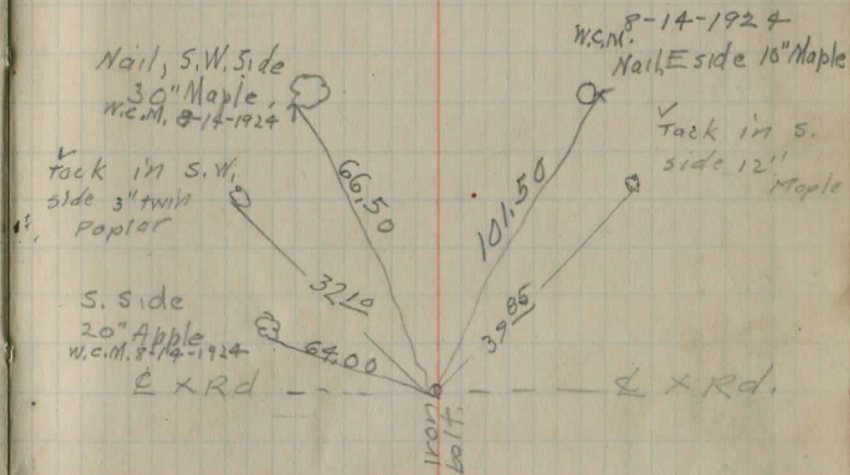

58+63.20
44+28
14 35.20

77

76

75

74

73

72

71

70


69

+54° Δ 0°-0'

68

67


66

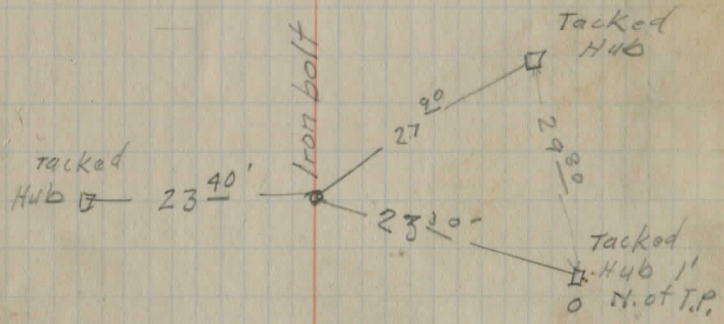

Mar. 18, 1924.

$\Delta = 0^{\circ} 12' L$

+47 $\frac{4}{\Delta}$



RM 1-10-20

40

89

88

87

86

85

84 Δ $0^{\circ} - 0'$

83

82


81

80

79


78

Iron
bolt



Tack in N.E.
side 12" Maple

7025



Barr
cor. middle
stone foundation
S.W. cor.

Wet Snow
1-11-21

Henn
Fred
Thompson

579 91 + 972

Sta	Angle	Bearing
RT=463		$\Delta = 10^{\circ}-00'$ Rt.
102		$D = 7^{\circ}-00'$
+75	$10^{\circ}-00'$ Rt.	$Pl = 101 + 75 \frac{0}{0}$
P.C.=+034		$T = 71 \frac{0}{0}$
101		$Pl = 101 + 03 \frac{1}{1}$
+47 Tacks in 1st plank N. end ^{bridge}		$L = 142 \frac{2}{2}$
100		$Pl = 102 + 46 \frac{3}{3}$
		$E = 3 \frac{1}{1}$

+90 Tacks in 1st plank S. end bridge

99

98

97

96

95

94

93

92

91


91

Changed Mar. 18, 1924
See Page 29

22 15 Lt.

~~2~~

11

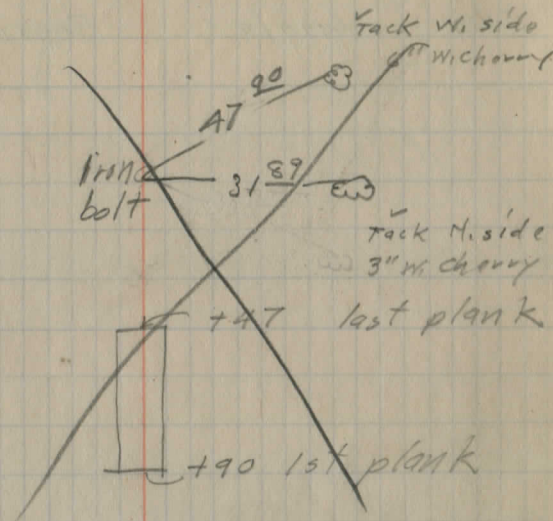

~~25 Lt.~~

Sta Angle Bearing

$\Delta = 70-10' \text{ RT}$
 $D = 2-30'$
 $PI = 105+88.9$
 $T = 1 \ 43.5$
 $PC = 104+45.4$
 $L = 2 \ 86.9$
 $PT = 107+32.0$
 $E = 44$

$\Delta = 22-15' \text{ LT}$
 $D = 40-00'$
 $PI = 103+95.8$
 $T = 2 \ 28.2$
 $PC = 103+67.6$
 $L = 2 \ 55.6$
 $PT = 104+23.2$
 $E =$

332° 70-10' RT.




+ 45° PC

+ 23° PT

104

+ 95° 22-15' LT.

104

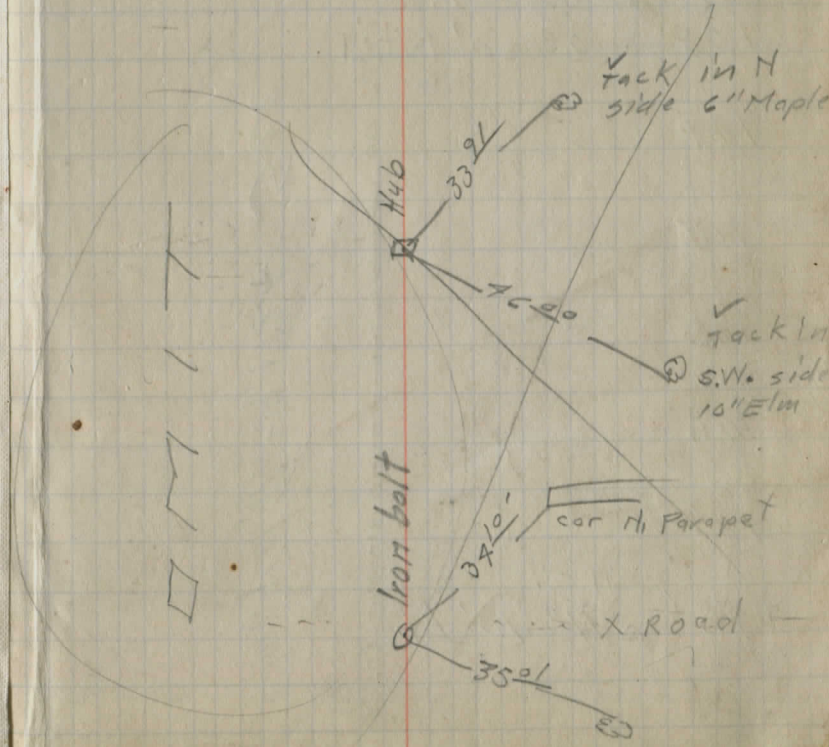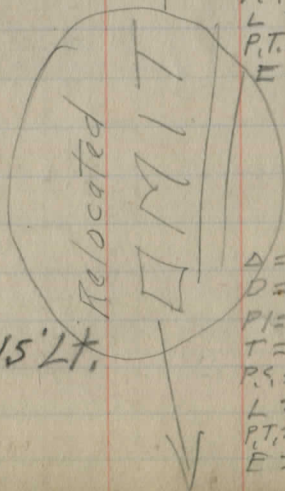

1-12-24 snow
blizzard

Sta Angle Bearing

113

112

111

110

109

~~+97 Iron on [unclear]~~

~~108 $\pm 2^{\circ} 20'$ R [unclear]~~

~~107~~

~~106~~

~~105~~

~~104~~

~~103~~

~~+92 $\pm 11^{\circ} 10'$ Lt.~~

(No curve figured - stopped on 74/79-)

Changed, Mar. 19, 1924 See Page 29

108700
1024929


507.1

637.0
507


130

762
507

255

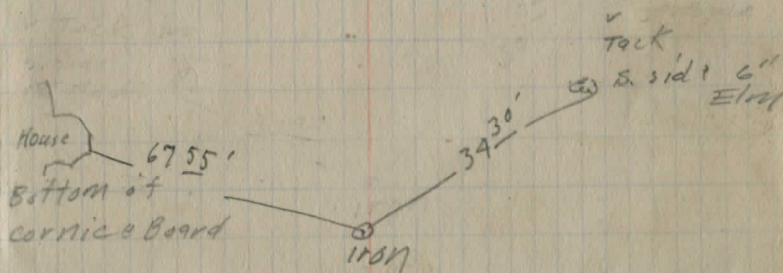

20' RT

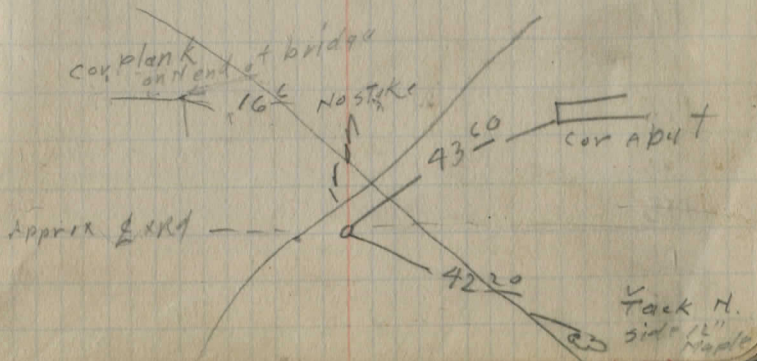

Tack H. side of [unclear]

Sta Angle Bearing

+27⁹ Δ 0°-0'

125

124

123

122

121

120

119


118

117

116

115

114

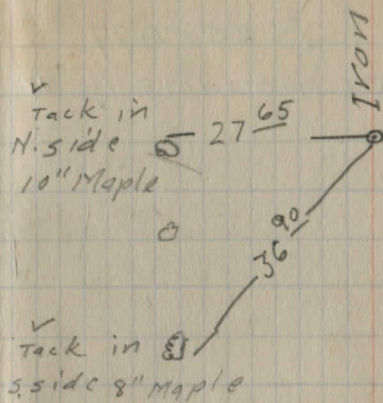

Sta Angle Bearing
 +133 00 Stone monument on

137

136

135

134

133

132

131

+123
 130 +283

129

128

127

126

CHESTER

Tack in N side
 at top of
 Tower Line 25⁰⁰ → Stone

Tack in
 S. side 6" Ash
 23⁴⁵ → RUSSELL

137 13.30 2.37 15
 10567
 31533
 26400
 57330
 47520
 28100

S. Rail Main Track

+282 1st Rail siding -

Sta. Angle- Bearing-

Topography

sta

Lt

Rt

patch

PL₁

<u>Lt</u>		<u>Rt</u>
32	32	18' +
31'	31'	18' +
	24'	+86
		+30
	30'	+10
		+5
		+75
	25'	94
		79
		+50
		+25
	30'	83
		+75
		+50
	30'	+25
		82
	26'	+85
		+75
		+50
		+30
	31'	+20
		+50
	50'	+80
		0

PL₂


steeds

T.H.

50'

H.

10.H. #33




		±	
		+60	27' 3
		+35	25' 3
		022	
		021	
		+30	
		020	
	26'	+55	
		019	
3	50'	+30	
		+20	19' †
		018	
		017	
3	20'	+75	
3	19'	+30	
		+05	19' †
		016	
3	19'	+90	
3	25	+40	
		015	
3	25	+95	
		014	
		+98	19' †
3	30	+75	
3	23	+40	
		013	
3	23'	+15	
		012	
3	24'	+05	19' †
		+5	
3	24	+20	
		011	
3	24'	+95	
		010	


Wells
1945/4


E

Peltort

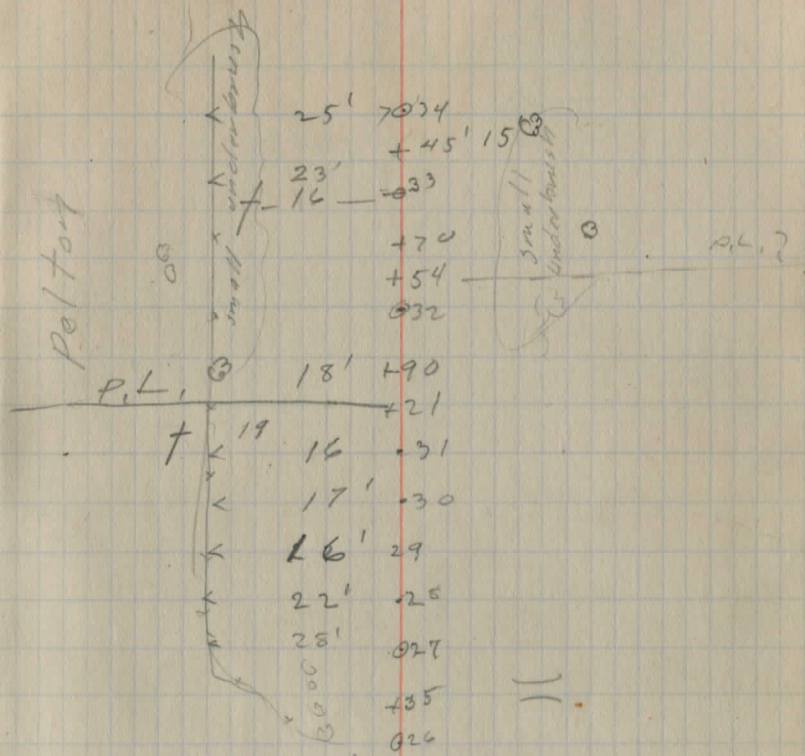

Patch

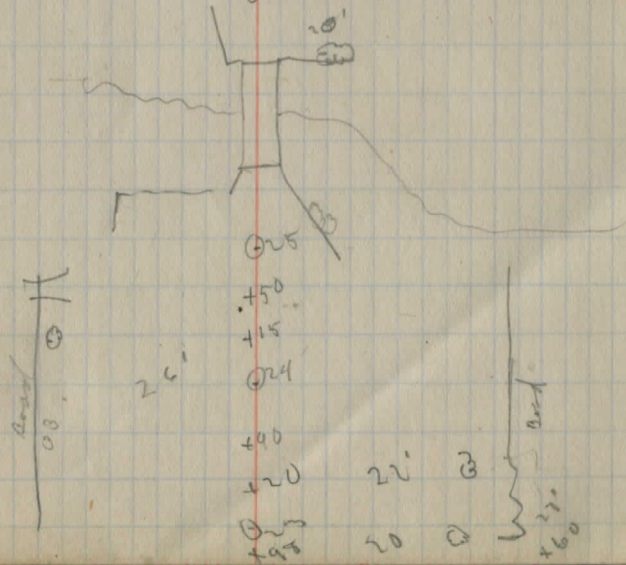


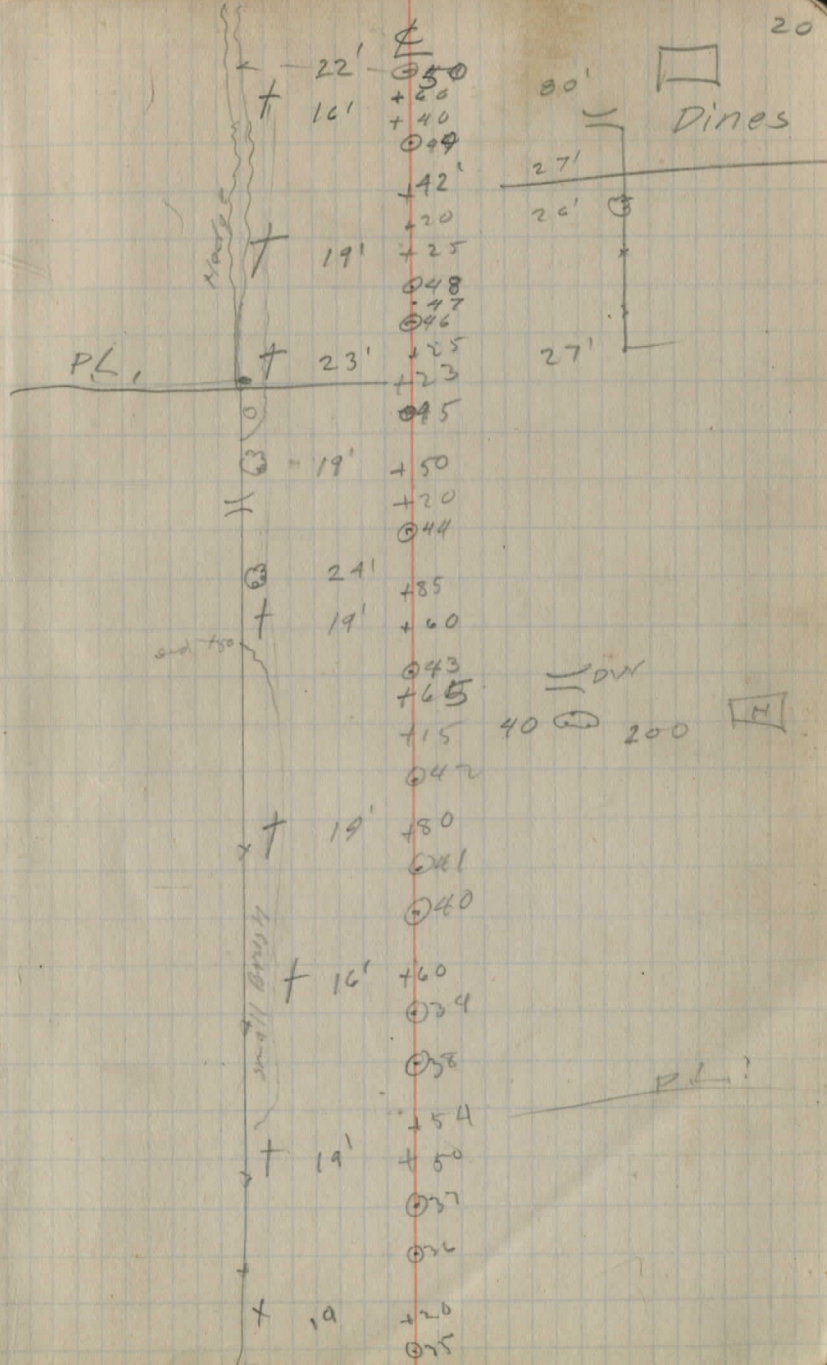

Pines



	+90	
⊙ 30'	+80	
⊙ 25'	+60	25' ⊙
⊙ 25'	+50	
⊙ 35'	+15	
75'	+15	
⊙ 59		
+98		25' ⊙
+90		22' †
+88		30 ⊙



⊙ 20'40'	⊙ 58	
	+90	
⊙ 20'80'	+80	
† 16'	+50	
⊙ 21'	⊙ 57	
⊙ 23	+60	
	⊙ 56	
† 16'	+95	
⊙ 15'	+30	
	⊙ 55	
⊙ 23'	+80	

2617



	+75	
	+30	
125'	⊙ 54	
⊙ 24	+70	
† 16	+66	
⊙ 25'	⊙ 53	
	⊙ 52	
† 1a'	+90	
	⊙ 51	

end Hedge

Brush

willows & brush

25' PL

Hall

PL

076
075
+40 20' +

074
+15
073
+45 20' +
72

071
+50 20' +

070
069
+45 20' +

068
067

0 20' +50 20' +
066

065
+25 20 +

064
063 20' +
+20

+15 25 0
062

0 29' +50

0 24' +10
061


0 25' +75 24 0

0 25' +30
+12 21 +
060

7 17
 +105
~~090~~
 +30
 +25
 089
 088
 +68 24' PL.
 087


31' +60
 086

ET +75 21' +



28' +35
 30' 085
 +75
 54' +50

= +30 =



+16 33 30'
 084
 083 +95 22'
 +30 20' +







+10
 082
 081
 745 PL.

080
 079
 +40 20' +
 78

26' +40
 077

= +90
 +40
 +35 20' +

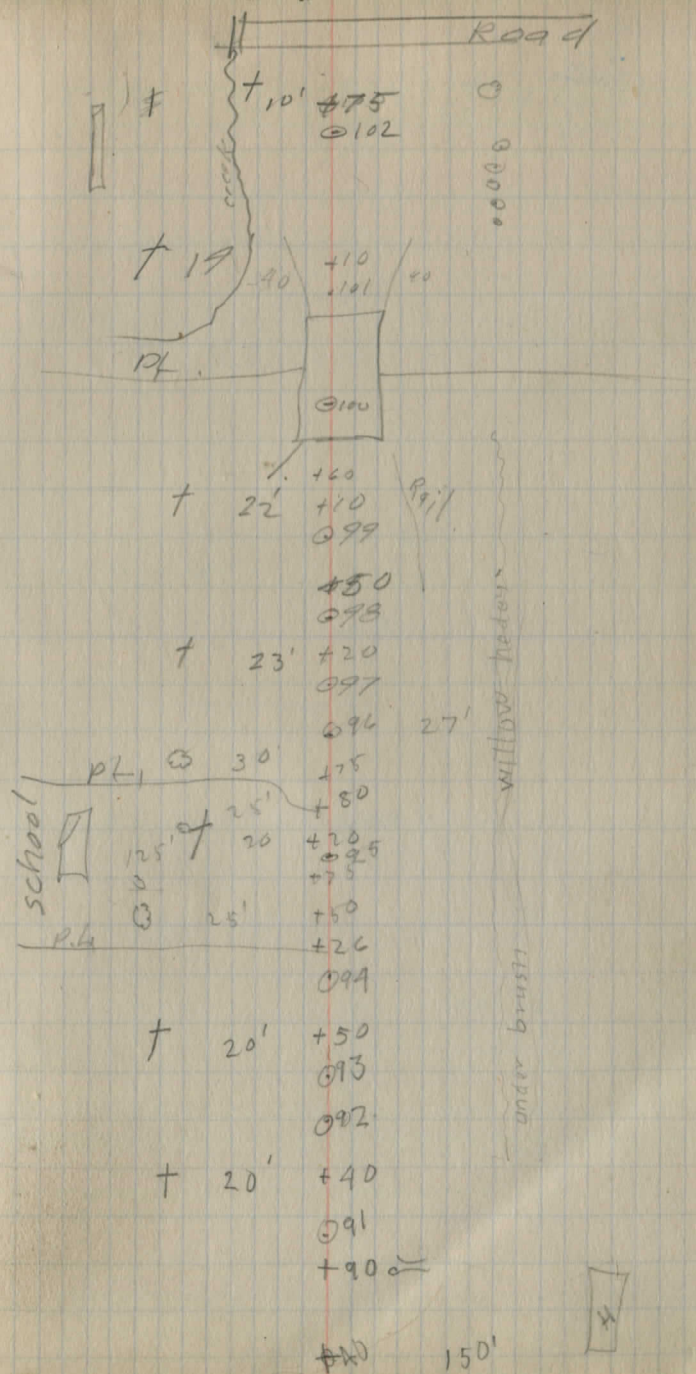


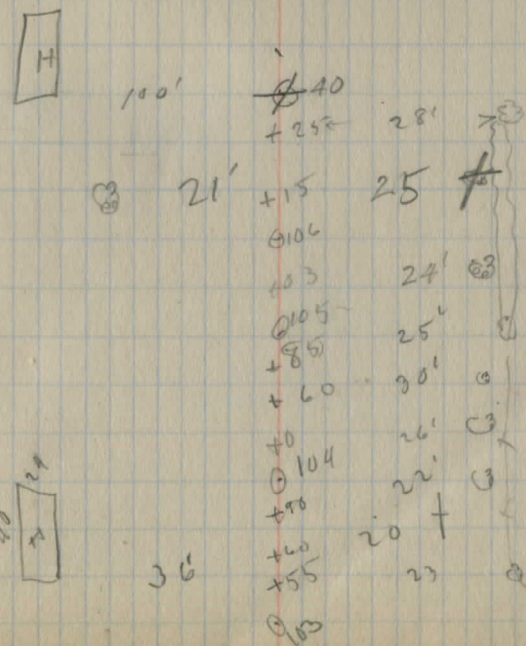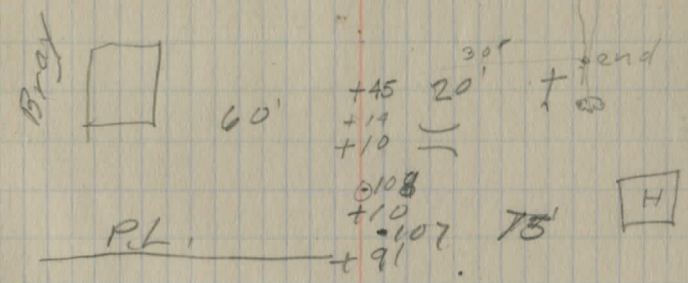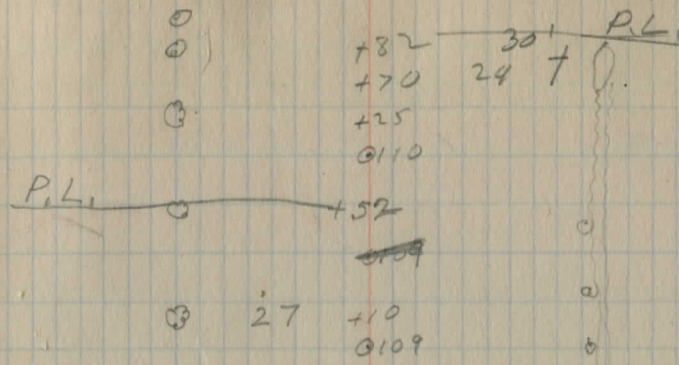

T.B.V. Co.




36

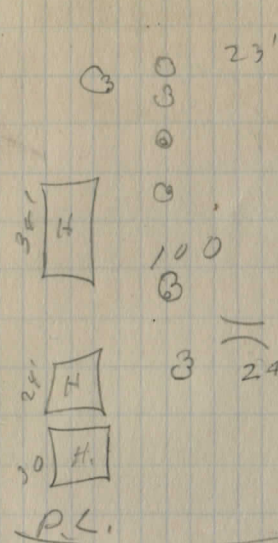

+60
 0118
 +42

 0117
 +88
 +75
 +35
 20
 +25


 0116
 +90
 23' +
 P.L.
 25 +
 = 0
 80'



+40
 +11

 0115
 P.L.

1200



+75
 160

 105
 0114
 +75
 +46

 140
 0113
 +85
 +75

 114
 0112
 +70
 +50

 0111

24' +
 = 0
 P.L.
 = 0
 100'
 24' +
 P.L.

Small people

+ 20' +60 100 7 27

+35
⊖125
+95 27' 7


+40 21' +
⊖124

+65 20'
+50 20' ⊖

⊖123
+70 21' +

⊖122
25' +68

+45
25' ⊖121



+60 22' +


~~+85~~
+05
45'

⊖120
~~+95~~ PL

⊖120
25'

+45
+30
23'

+15 28' ⊖
⊖119
+80 7
90



$\begin{array}{r} + 20' \\ \hline \end{array}$

$\begin{array}{r} + 30 \\ \text{O}136 \\ + 15 \\ + 12 \\ \text{O}135 \\ \hline + 70 \\ \text{O}139 \\ + 90 \\ \hline + 21' \text{ O}133 \\ + 70 \\ \text{O}132 \\ \hline \text{O} 30' + 30 \\ \text{O} 22' \text{ O}131 \\ + 22' + 60 \end{array}$

S.

H

40'

width 25'
Driveway

7 O130

+ 10

O 129

+ 75

O 128

+ 85

O 127

+ 66

O 126

+ 23'

27'

15' +

17' +

17' +

16' +

16' + elec.

New location old location
107+97.8 = 108+00 $\Delta = 0^{\circ}50' R.$

107

106

105

104

103

102+92.9 Δ $\Delta = 0^{\circ}58' L.$

102

101

100+45.2

100

99+90.5

99

98+57.3 $\Delta P.L. \Delta = 1^{\circ}31' R$

98

97

96

95

94

93

92

91

90+47.4 $\Delta = 0^{\circ}12' L.$

Mar. 18, 1924
F. H. W., Cool. Clear.

E. A. Fiedler
W. C. Marks
F. Grau.

29

10797.8

10292.9

504.9

N.E. Cor. N.H.W.

33,23

E. E. + W. Rd. Δ

29,30

S.E. Cor. S.H.W.

2 nails on E Bridge

2 nails on E Bridge

E. 1.8 W. of old location

E. 1.8 W. of old location

E. 1.8 W. of old location

30' Hub. R.P.

30' Hub R.P.

E. 0.8 W. of old location

E. 0.25 W. of old location

102192.9
98157.3
435.6
48

Az. Stadia, Horiz. Rod

125+28

ΔA 0°0' 3.56

128+84 B.M.
H.I. 112.4

1108.70

23.96
11270

Angle	Stadia	Horiz.	Rod	Height
345°	1.25	0	5.3	1107.1
331°	1.25		5.3	07.1
321°	1.15		6.2	06.2
333	.85		6.1	06.3
300	.66		4.6	07.8
273	44		5.9	06.5
247	44		6.8	05.6
208	92		6.7	05.7
198	155		6.7	05.7
189	310		3.1	09.3
207	320		5.2	07.2
221	215		6.0	06.4
234	170		6.3	06.1
270	135		6.3	06.1
282	210		6.5	05.9
283	280		6.0	06.4
281	280		8.5	03.9
284	300'		—	
261°	250		7.4	05.0
242°	255		6.7	05.7
276	295		4.9	07.5

N.E. Cor. Barn

N.E. Cor. Barn

A.Z. Stadia Hor L. Rod. E1,

128+84

H. 1. 1112.4

2330	400		7.1	1108.3
2380	420		4.4	1108.0
253 1/2	370		4.8	1107.6
2630	325		6.1	06.3
2590	480		8.3	04.1
235	520		6.9	05.5
164 1/2	310	+30'	0.0	15.1
1380	400'	0	+1.5	13.9
1230	530'	+0°55'	4.0	16.9
1160	510'	+0°35'	0.0	17.5
1020	460'	—	7.4	05.0
940	460'		7.4	05.0
920 30'	4.60		8.3	0.41
90 1/2	475'		4.9	07.5
880 20'	470		7.6	04.8
84 1/2	380		7.0	05.4
85 1/4	375'		4.6	07.8
88 3/4	370		6.9	05.5
80 1/2	265		6.7	05.7
76 1/2	280		4.7	07.7
74 3/4	290		6.2	06.2
39	175		5.7	06.7
39	163		4.6	07.8
39	142		5.8	06.6
39	100		6.0	06.4

N.W. Cor. Barn.
S. E. Cor. Barn
N.E. Cor. Barn

N.W. Cor. House

S. Drive to Barn Door
N. Drive at " "

H.I. 1112.7

Δ 128784	Az.	Stadia,	Red	
	70°	175	6.4	1106.0
	94°	365	5.8	06.6
	110	390	8.0	04.4
	107	285	7.7	04.7
	130	190	6.8	05.6
	154	190	7.1	05.3
	0.0	165	4.0	08.4

± Tract.

 Δ 130700

H.I. 1111.9

	270°	120'	7.3	04.6
	± 70°	285'	6.9	05.0
	0°	0.	4.7	07.2

$$\begin{array}{r} 1108.7 \\ 3.2 \\ \hline 1111.9 \end{array}$$
 H.I.

29+77.2 3°21'
 29+00 2°11'
 28+00 0°41'
 27+53.9
 28+65.7 P.I. Δ = 6°42' L.

D = 3°
 T = 111.8
 L = 223.3
 P.C. = 27+53.9
 P.T. = 29+77.2


✓ 27+32.7 8°27' P.T.
 27+00 6°36'

26+50 3°44'
 26+00 0°52'
 25+85.3 P.C.

Δ = 16°54'
 R = 500'
 T = 74.7
 D = 11°28'
 L = 147.4
 P.C. = 25+85.3
 P.T. = 27+32.7

Δ = 16°54' Left
~~Proposed P.I.~~

25+56.5

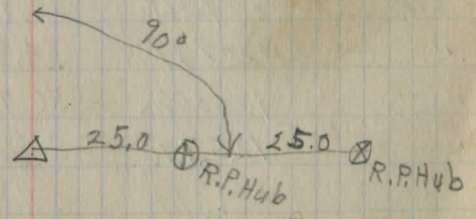

Middle uprights of Trusses

Initial	Number	Weight	Material	Placed	Unloaded
N+W	16834	56	Gran.	10-31-24	11/3-24
P.R.R.	704627	44	Gran.	10/31-24	11/4-24
B+O	831831	59.75	Screenings	10/31-24	11/4-24
P.R.R.	150229	44	Gran.	10/31-24	11/4-24
B+O	324468	57.	Screenings	11/3-24	11/5-24
N+W	5555	56	Gran.	11/3-24	11/5-24
P.M.K.+Y.	65491	40	Gran.	11/4-24	11/6-24
B+O	24239	57.35	Screenings	11/4-24	11/6-24
P.M.K.+Y	528836	40	Gran.	11/5-24	11/6-24
B+O 32	324880	55.90	#1	11/5-24	11/6-24
B+O	321626	57	#1	11/5-24	11/7-24
B+O	128224	50	#1	11/5-24	11/7-24
NYC	5-411521	52.35	#1	11/6-24	11/7-24
P+LE	5-51000	57	#1	11/6-24	11/7-24
B+O	322295	51.90	#1	11/6-24	11/8-24
B+O	321245	51.80	#1	11/6-24	11/8-24
B+O	331369	57.80	#1	11/6-24	11/8-24
CCC+S+L	5-79023	57	#1	11/6-24	11/8-24
B+O	327261	54.85	#1	11/7-24	11/10-24
"	330791	54.80	#1	11/7-24	11/10-24
"	126302	56.75	#1	11/7-24	11/10-24
"	125776	54.65	#1	11/8-24	11/10-24
"	321379	55.95	#1	11/8-24	11/10-24
"	320965	59.50	#1	11/9-24	11/11-24
"	331378	56.65	#1	11/9-24	11/11-24


2035 75) 57.80
 525
 530
 525

Culverts

station	Date	Cement
51+70	Sept. 19, 1924	74
78+06	" 26, 1924	80
46+33	Oct. 2, 1924	
61+95	Oct. 3, 1924	
43+15	Oct. 4, 1924	
35+65	Oct. 27, 1924	Finished

Initial	Number	Weight.	Material	Placed	Released
B+O	126867	53.45	# 1	"/9-24	"/11-24
"	328041	57.50	# 1	"/9-24	"/11-24
"	324654	56.50	# 1	"/9-24	"/11-24
"	420036	57.60	# 1	"/9-24	"/12-24
"	324134	57.70	# 1	"/10-24	"/12-24
"	322941	55.00	# 1	"/12-24	"/13-24
"	322654	60.50	# 1	"/12-24	"/13-24
"	126006	58.90	# 1	"/12-24	"/13-24
"	324584	57.90	# 1	"/12-24	"/14-24
"	323053	58.50	# 1	"/13-24	"/14-24
"	328581	54.	# 1	"/14-24	"/15-24
"	120457	52.70	# 1	"/14-24	"/15-24
"	329856	59.80	# 1	"/15-24	"/15-24
"	327595	63.75	# 1	"/15-24	"/15-24
"	324337	67.50	Screenings	"/15-24	"/17-24
"	328316	61.10	Screenings	"/15-24	"/17-24
N.Y.C.	S-42053	40.00	Gran	"/17-24	"/17-24
B+O	320596	57.50	# 1	"/17-24	"/18-24
"	324365	55.75	# 1	"/17-24	"/18-24
"	128815	52.90	# 1	"/17-24	"/18-24
"	126905	53.70	# 1	"/18-24	"/18-24
"	126490	54.50	# 1	"/18-24	"/18-24
"	126496	52.60	# 1	"/18-24	"/19-24
"	322622	54.40	# 1	"/18-24	"/19-24
B+O.	420021	56.30	# 1	"/18-24	"/19-24

Initial	Number	Weight	Material	Placed	Released
B+O	324016	57.05	#1	11/19-24	11/20-24
"	320798	60.05	Screenings	11/19-24	11/20-24
"	420329	60.00	#1	11/19-24	11/20-24
"	330305	52.55	#1	11/19-24	11/21-24
"	331313	56.90	#1	11/19-24	11/21-24
"	327770	61.10	#1	11/19-24	11/21-24
"	324284	60.50	#1	11/20-24	11/25-24
"	326365	59.60	#1	11/20-24	11/25-24
"	331904	57.55	#1	11/20-24	11/25-24
"	124360	52.85	#1	11/20-24	11/26-24
"	326369	56.05	Screenings	11/20-24	11/28-24
"	127226	60.10	#1	11/21-24	11/26-24
NYC	5-410732	57.58	#23	11/25-24	11/28-24
"	5-408744	55.25	#23	11/25-24	11/28-24
"	5-414063	52.70	#23	11/25-24	11/28-24
B+O	322626	59.70	#1	11/25-24	11/29-24
B+O	320300	56.85	#1+2	11/28-24	11/28-24
"	329286	56.70	#1+2	11/28-24	11/29-24
"	326003		#23	11/29-24	11/29-24
"	124690		#1+2	11/29-24	11/29-24

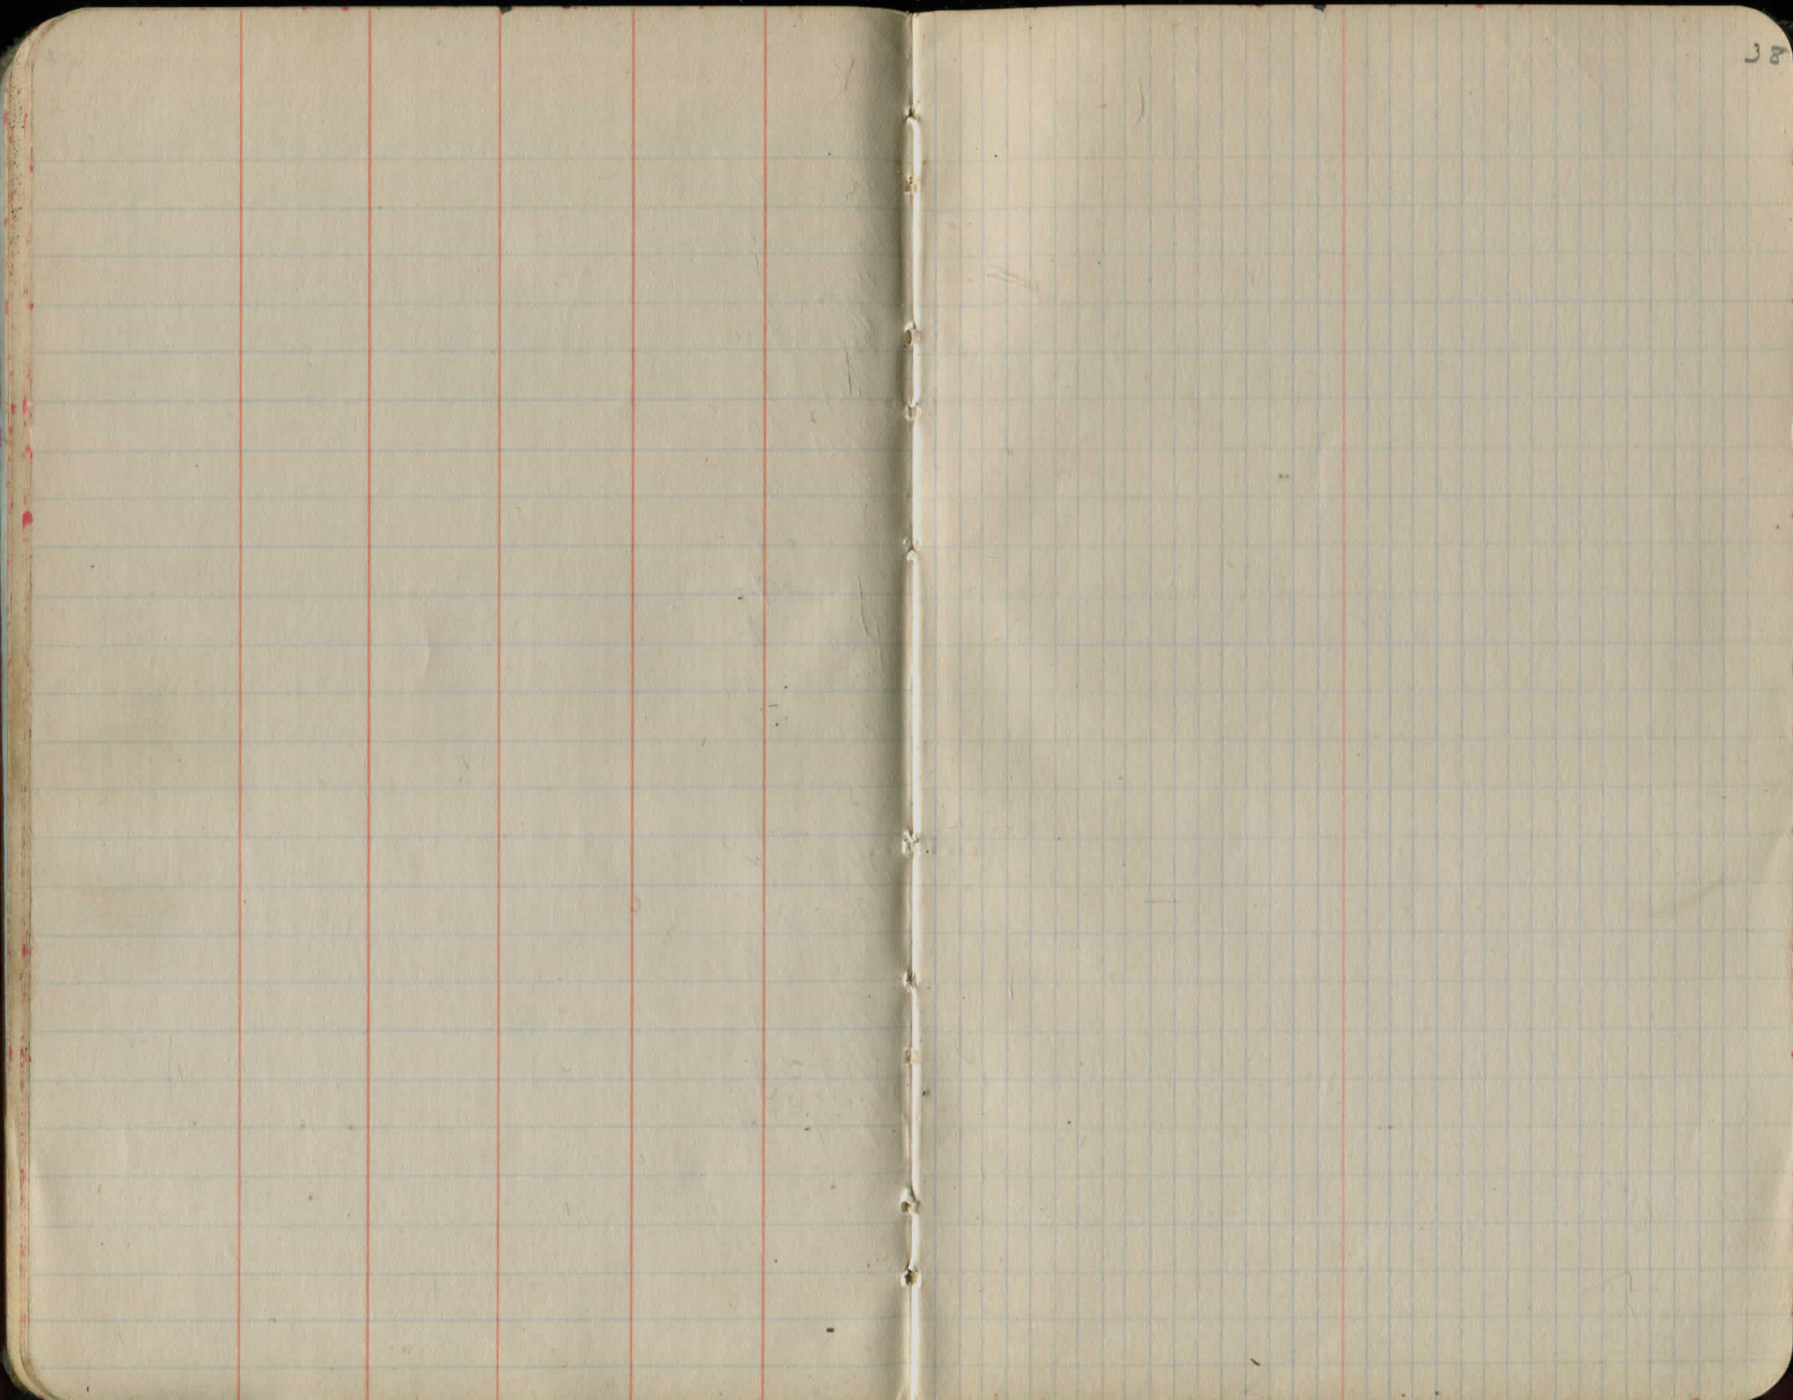



1924

1st Base Course - 5"

Nov. 6,	From Sta,	To Sta
Nov. 6	100+45	102+00
7	103+00	113+10
8	113+10	124+33
10	124+33	129+80
13	80+50	88+30
14	88+30	94+30
15	94+30	99+90
19	{ 137+13.3	{ 130+50
	{ 130+27	{ 129+80
20	59+00	60+40
21	60+40	67+90
25	67+90	75+50
26	75+50	80+50

Quit at 4
 Rain at 3 P.M.
 Marks, Grau + Reynolds
 L+G, 58+00-78+00

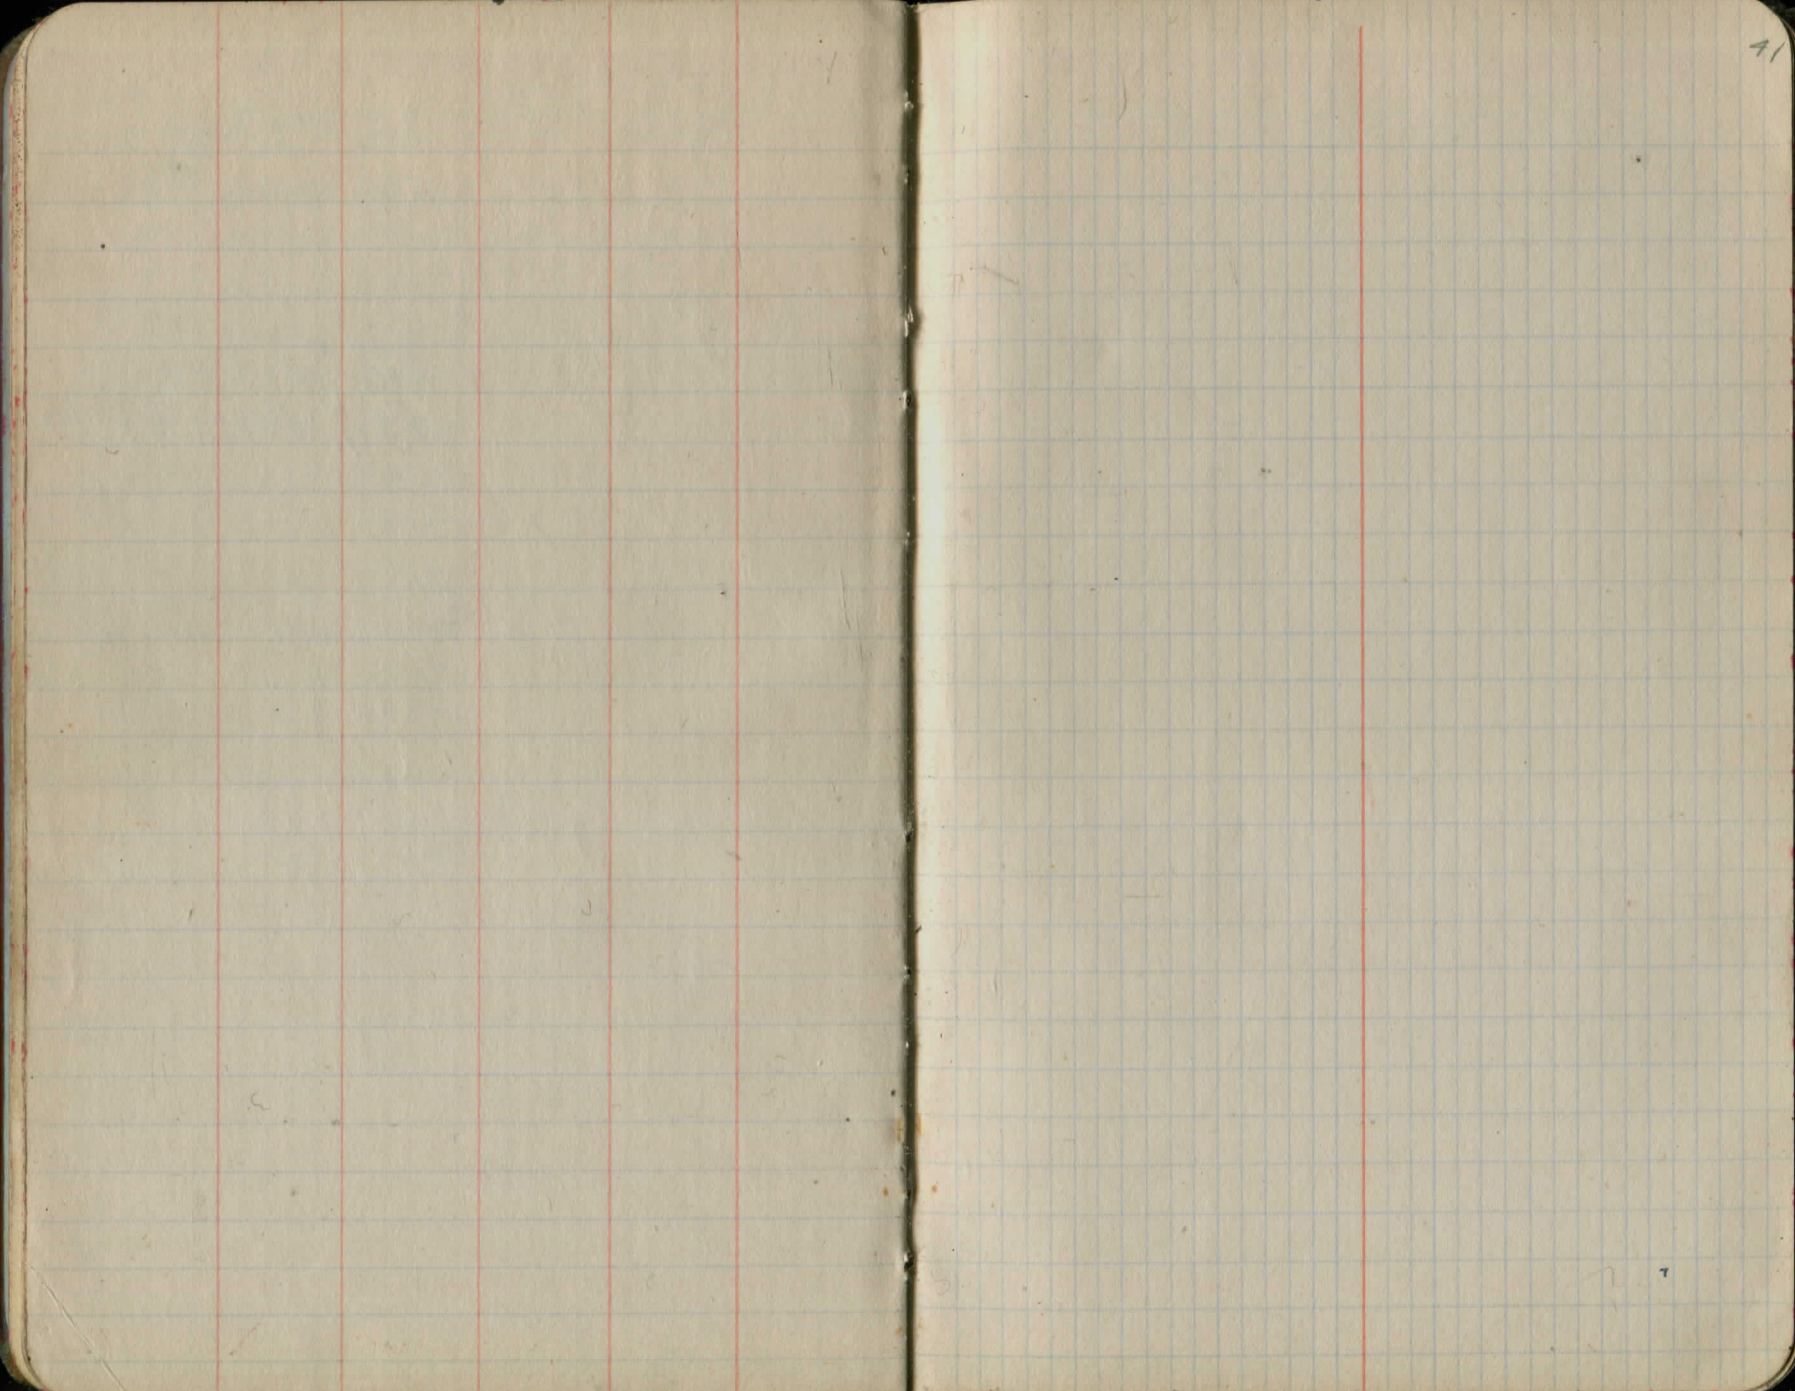

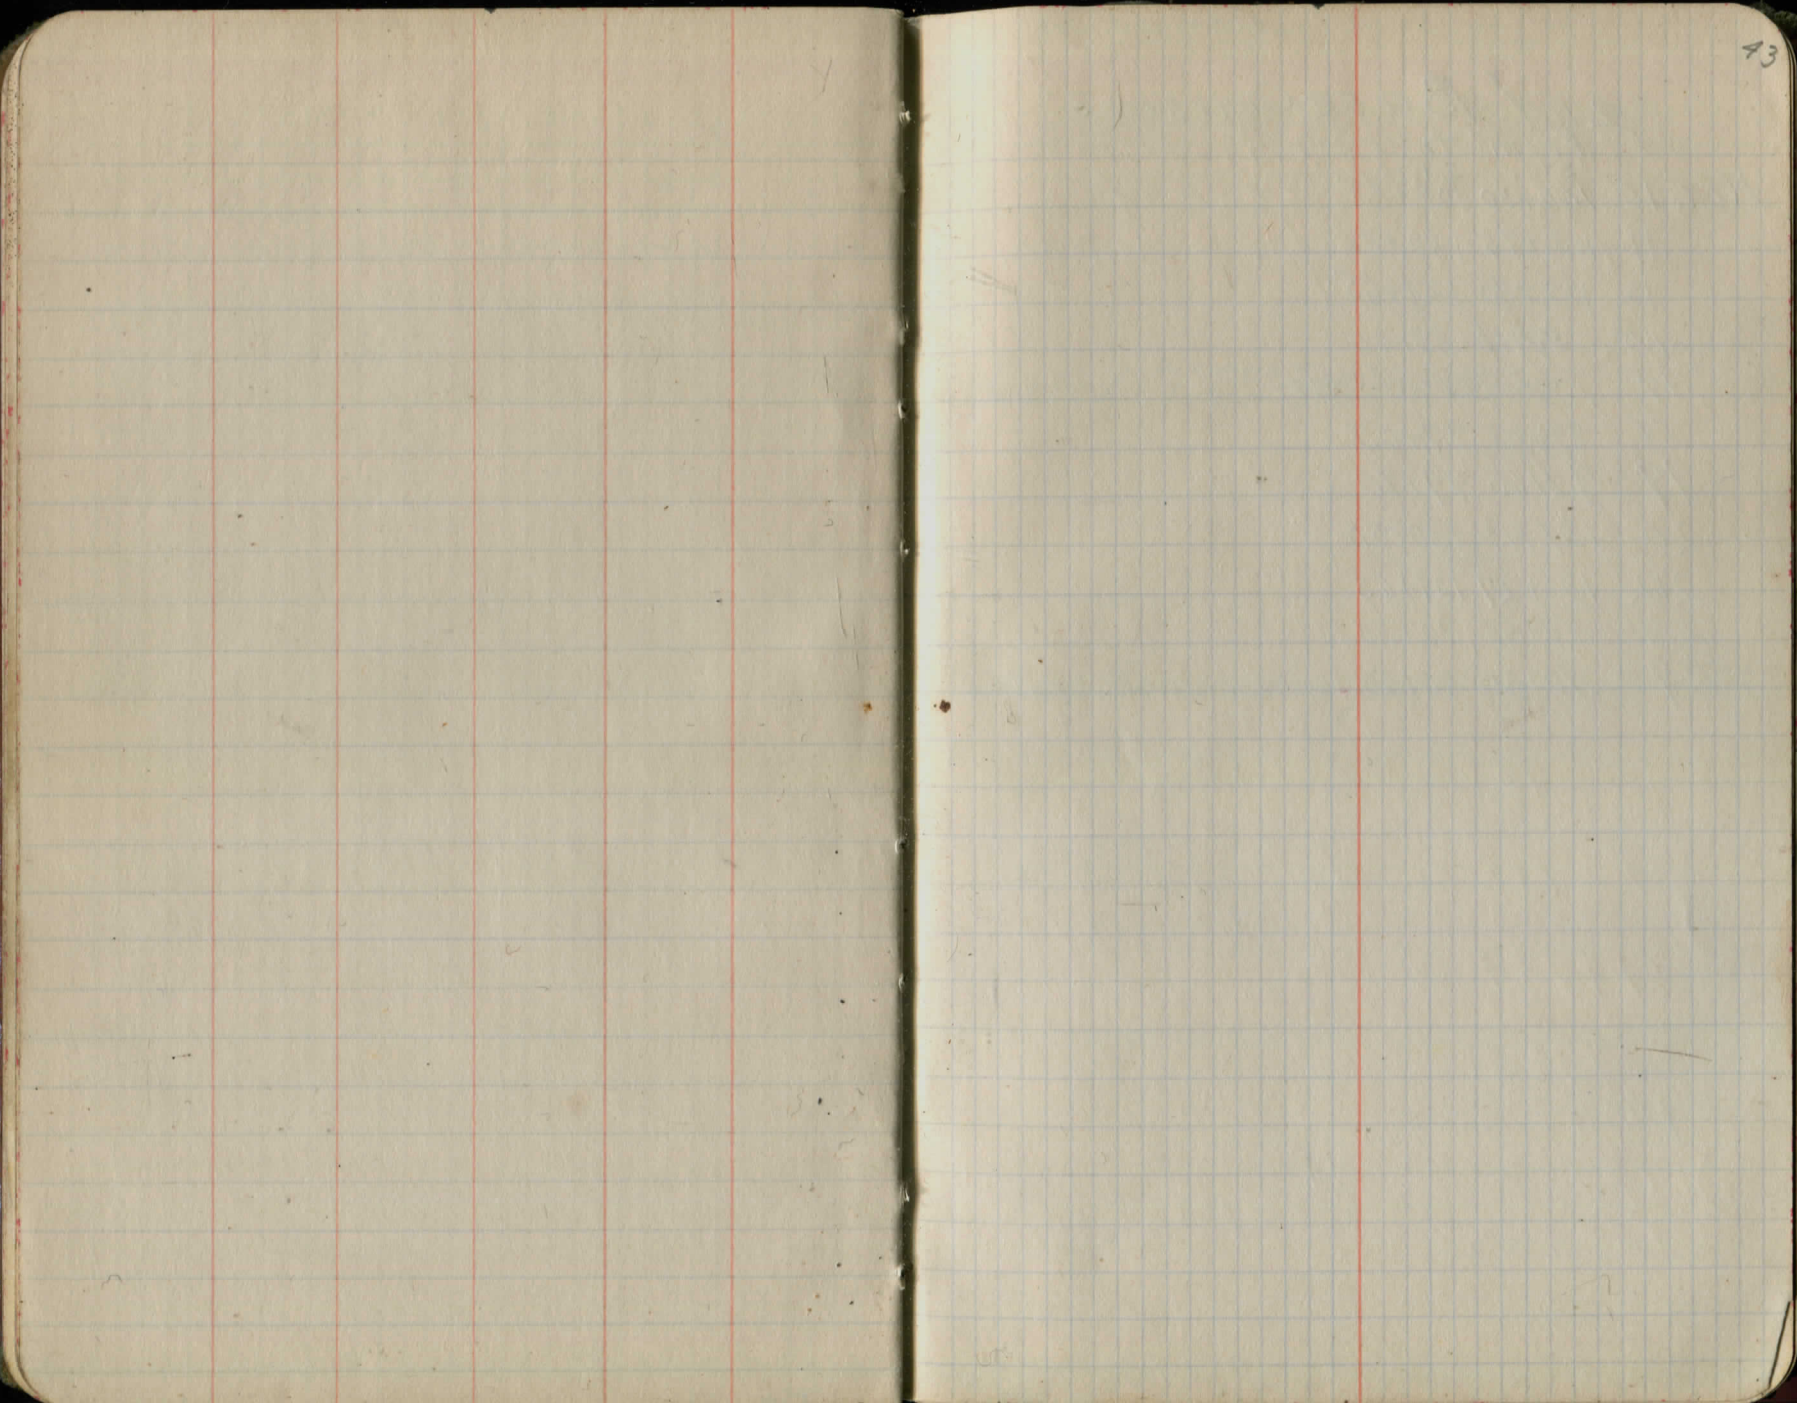

2nd Base Course - 3"

Nov. 10 From To
Sta. Sta.
100+50 105+85

11 105+85 122+40

12 122+40 129+65

15 80+60 83+00

17 2 Truck Loads,

18 83+00 97+65

19 97+65 99+90

20 137+13 130+50

22 130+27 129+65

28 59+05 70+50

29 70+50 80+60

44
Unloaded 2 cars SCR
1 car GRAN. SNOW,

2 Base Courses down from N Twp line to ^{Ditch} Corner.

June 30, 1925.
Both Base Courses at
Stable + 00 for Estimates

13713
1600
12113 lin ft.

44 lin ft Silver Creek Bridge
57 lin ft. Chagrin River Bridge
23 lin ft. C+E, Tracks
124 lin ft deductions

12113 lin ft.
124 lin ft. Deducted
11989 lin ft.
14 width

47956

11989

9) 167846 sq. ft

18,649.56 sq. yds 1st Base Course

18649.56 sq. yds 2nd Base Course

18650 sq. yds. for estimate on Each Course

1925
 July 22
 Men 12
 Stone Trucks 5
 Rollers 2
 Tar Distributors —
 Wet from Rain on preceding

July 23
 Men 11
 Stone Trucks 4
 Rollers 2
 Tar Distributors 2
 IIII
 I

July 24
 Men 11
 Stone Trucks 4
 Rollers 2
 Tar Distributors 2
 IIII

to check on Tar Penetration

13713	
<u>58+50</u>	lin ft.
7863	
80	Deduct for Bridge + RR.
<u>7783</u>	lin ft.
14	ft. width
<u>31132</u>	
<u>7783</u>	
108962	sq. ft.
<u>11520</u>	
97442	sq. ft.
<u>10827</u>	sq. yd.
2 gal	
<u>21654</u>	gal. required for penetration

77+10	
<u>63+00</u>	lin ft. Not poured
1440	
8	ft wide.
<u>11520</u>	sq. ft.

Top Course Stone 60+00 - 55+10.
 " Tar Penet.
 " Seal

Top Course Stone 55+10 to 44+00
 Penetration { Right 58+50 - 81+90
 { Left 58+50 to 63+00
 Seal Coat { Right 88+80
 { Left 89+70

Top Course Stone 44+00 - 34+60
 Penetration { Right
 { Left 81+75 to 63+00
 Seal Coat { Right 58+50 to 64+80
 { Left

seal coat.	Required	Car No.	
137+13	Pen. 21654 gal.	5078	9413 gal.
8800	Seal. 5639 gal.	16671	9489 gal.
4973 lin ft.	27293	5067	9503 gal.
80 deduct			28505 gal.
4833 lin ft.			<u>380</u>
14 ft. wide			28125 gal.
19332			required 27293 gal.
4838			Surplus 832
9) 67662 sq. ft.			
7518 sq. yd.			
<u>0.75 gal</u>			
37590			
<u>52626</u>			
5638.50 gal.			
Required for Seal.			

1925
 July 25 Men 5 Stone Trucks 2 Rollers 2 Tar Dust Trucks

Rain at 2:30 P.M.

July 27 11 3 2 2 111
 3 tank has 600 gal

July 28 11 3 1 —
 Rain at 8 A.M.

July 29 11 3 1 2 1111
 1111

July 30 11 3 1 2 1111
 1111

July 31 Rain, No Tar.

Top Course Stone 34+60 - 24+5
 Penetration Right 58+50 - 54+80
 Left, 58+50 - 52+60
 Seal. Right 64+80 - 88+90
 Left, 58+50 - 89+70

Penetration Right 54+80 - 47+30
 Left, 52+60 - 46+20
 Top Course Stone 24+50 - 14+00

14+00 - 12+50

No Tar.

Top course Stone 12+50 - 4+00
 Penetration Right $\begin{matrix} 6+90 - 18+90 \\ 47+30 - 39+60 \end{matrix}$
 Left, $\begin{matrix} 6+90 - 16+90 \\ 46+20 - 34+30 \end{matrix}$

Top Course Stone 4+00 - 0+00
 Penetration Right { 6+90 - 0+00
 18+90 - 34+30
 Left { 6+90 - 0+00
 16+10 - 27+05
 34+30 - 33+00

P. M. Payroll

		gals
B.M. X,	5078	9413
G.A.T. X.	16671	9489
B.M. X,	5067	9503
B.M. X,	5066	9194
B.M. X	5078	9103
G.A.T. X.	16671	9036
3 Trucks @ 760 gal.		2280
		<hr/>
		58018

1925


Aug. 1	Men	Roller.	Grader.	Tar Distrib.
	10	1	1	—


Aug. 3	9	1	2	1 (2)
				1 (1)
				(2) N11
				1111


49


Bermes + Ditches


Penetration	Right	34 + 30 - 39 + 60
	Left	27 + 05 - 33 + 00
Seal Coat	Right	58 + 50 - 0 + 00
	Left	58 + 50 - 0 + 00

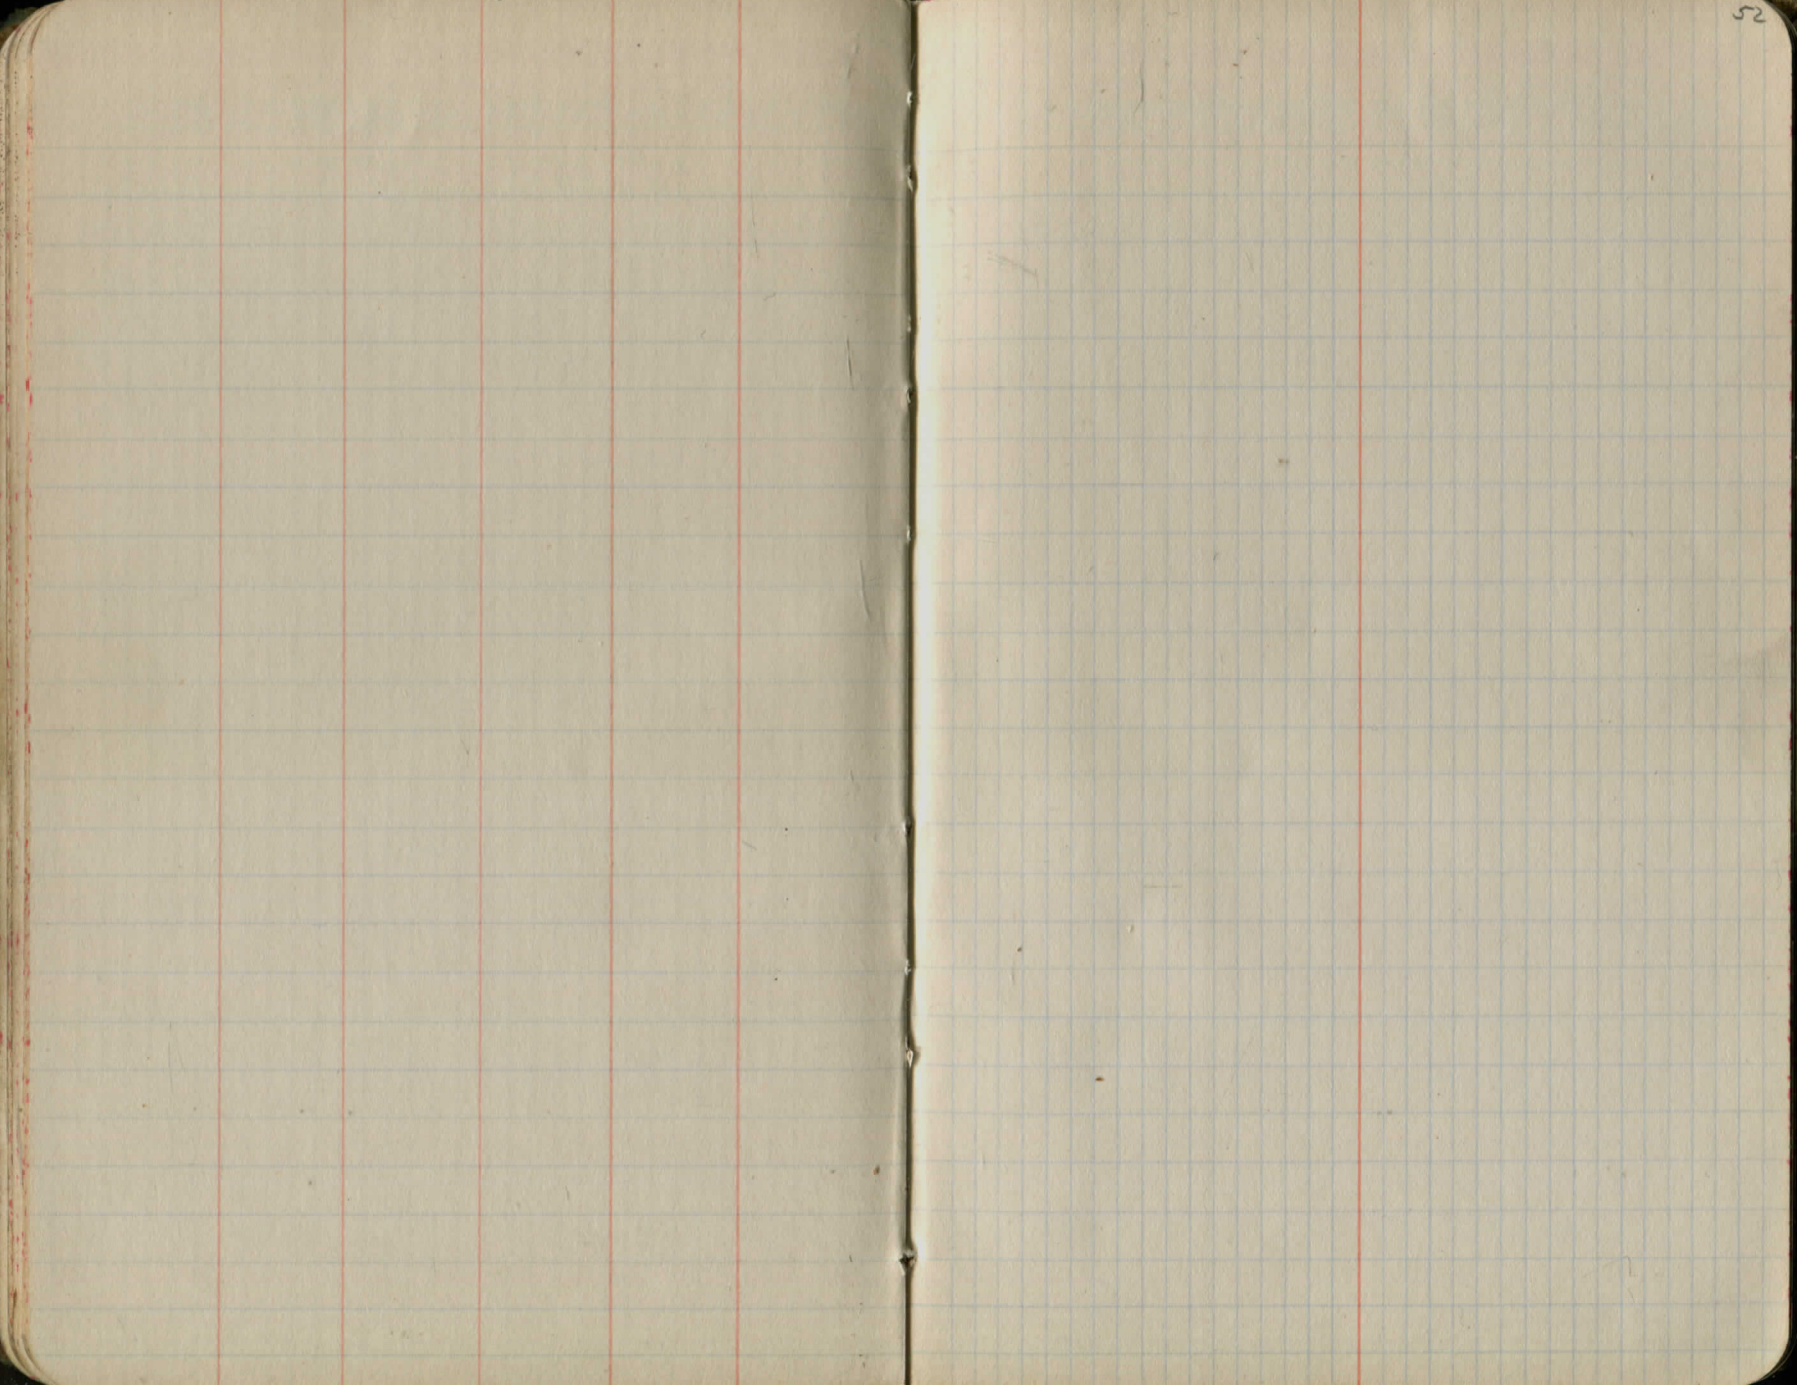


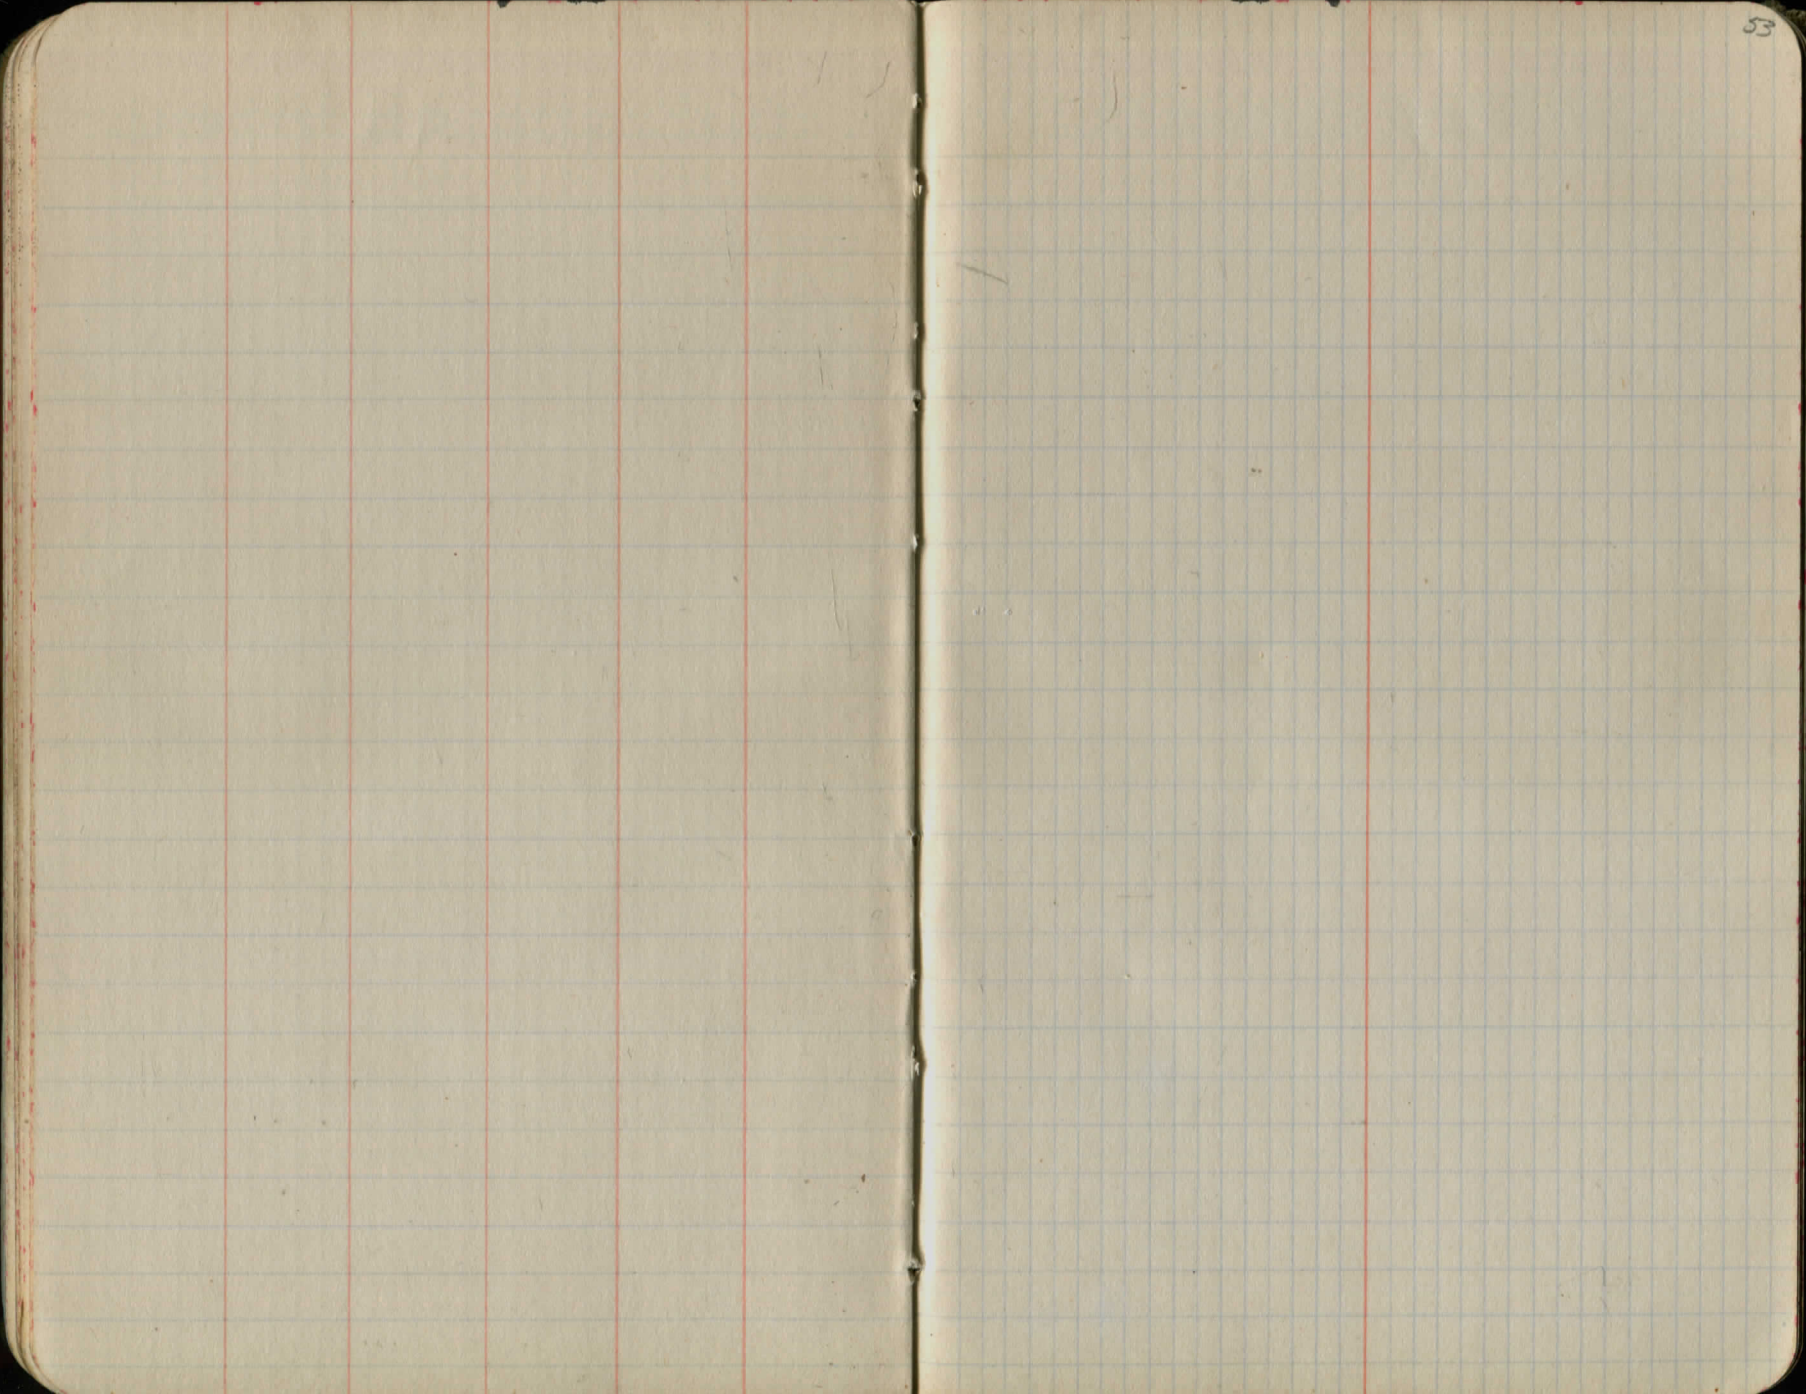


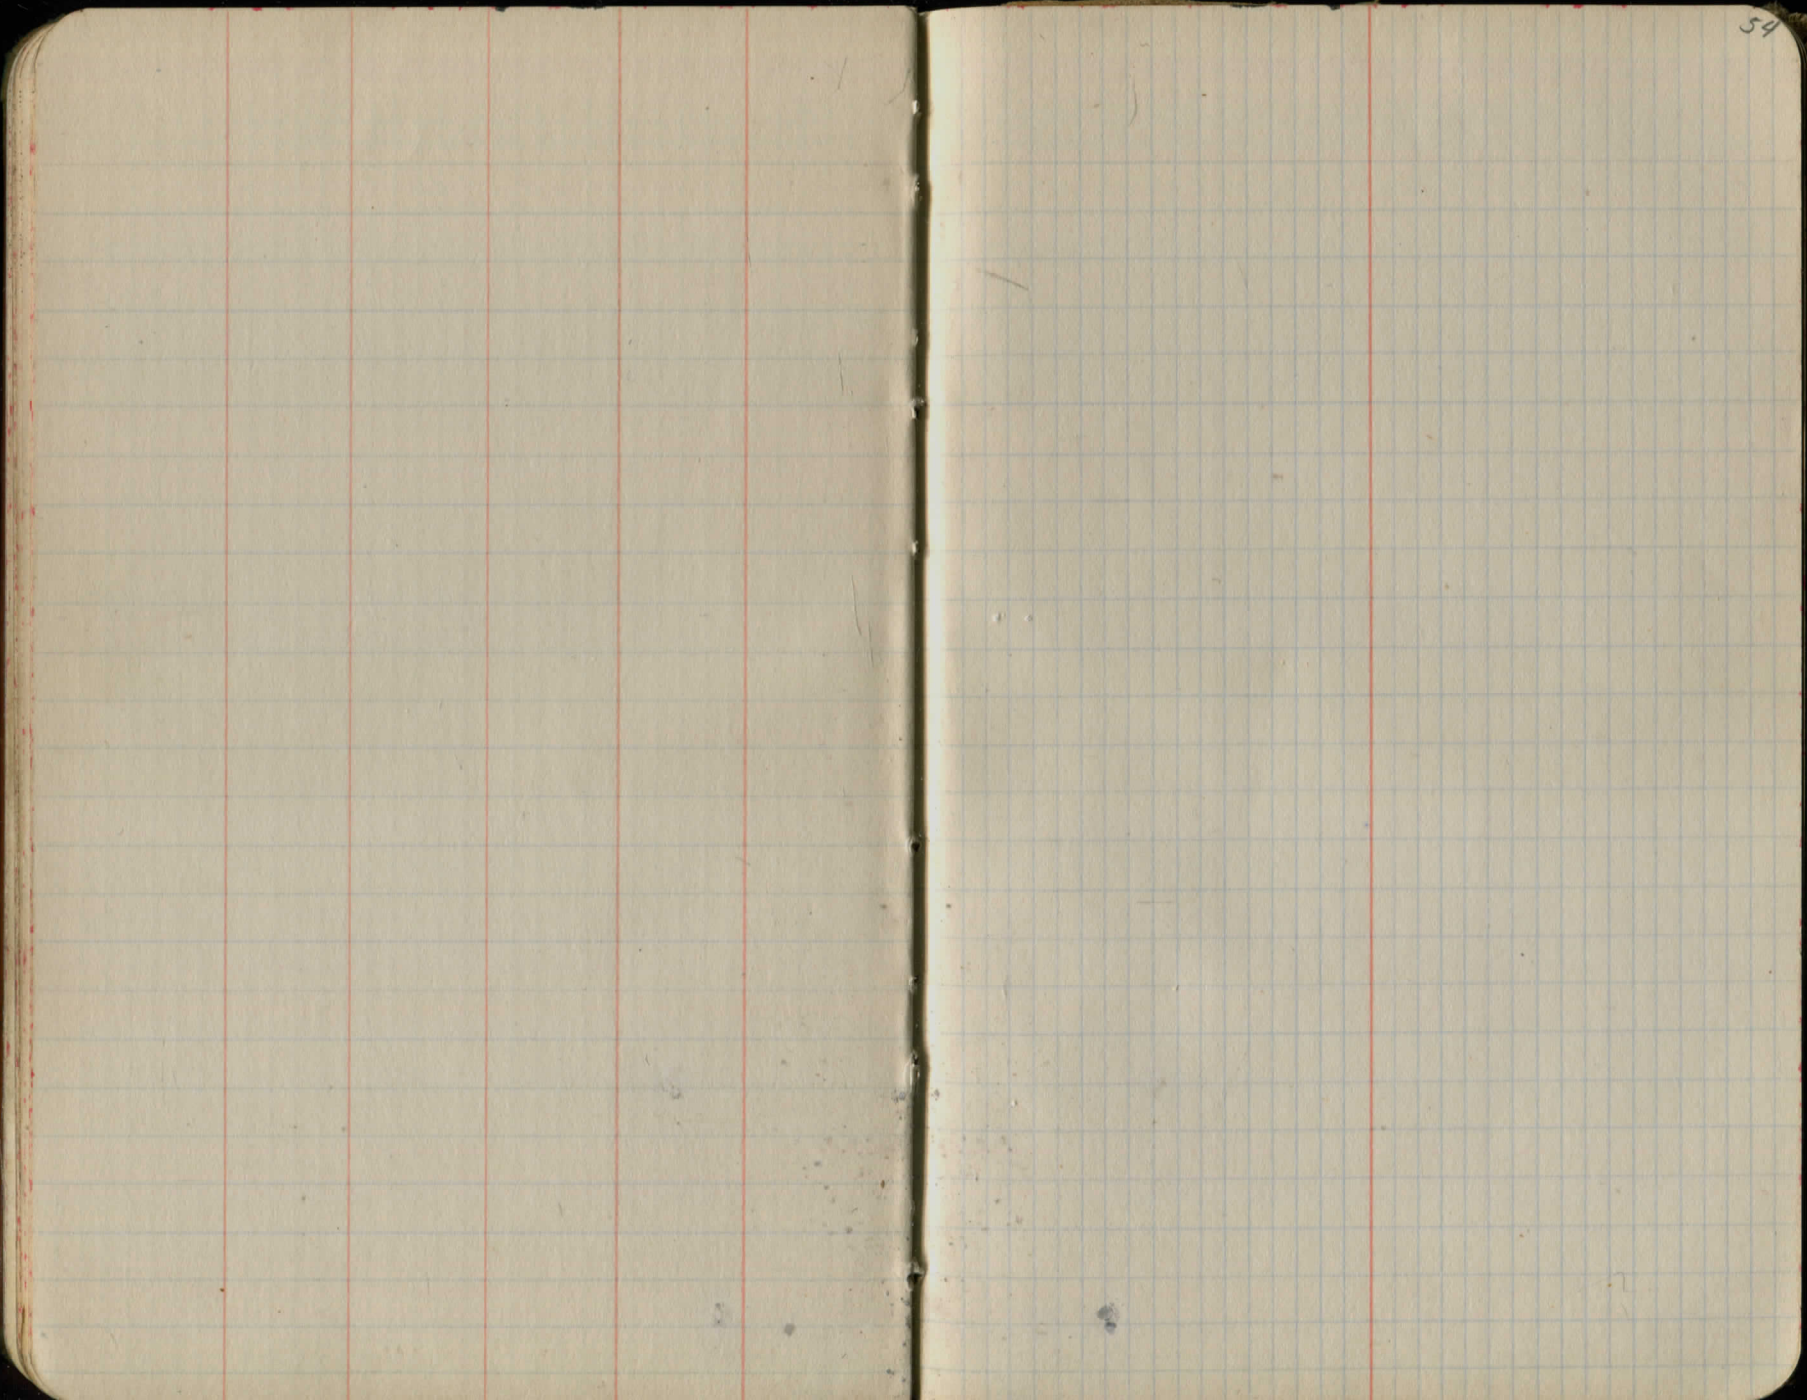


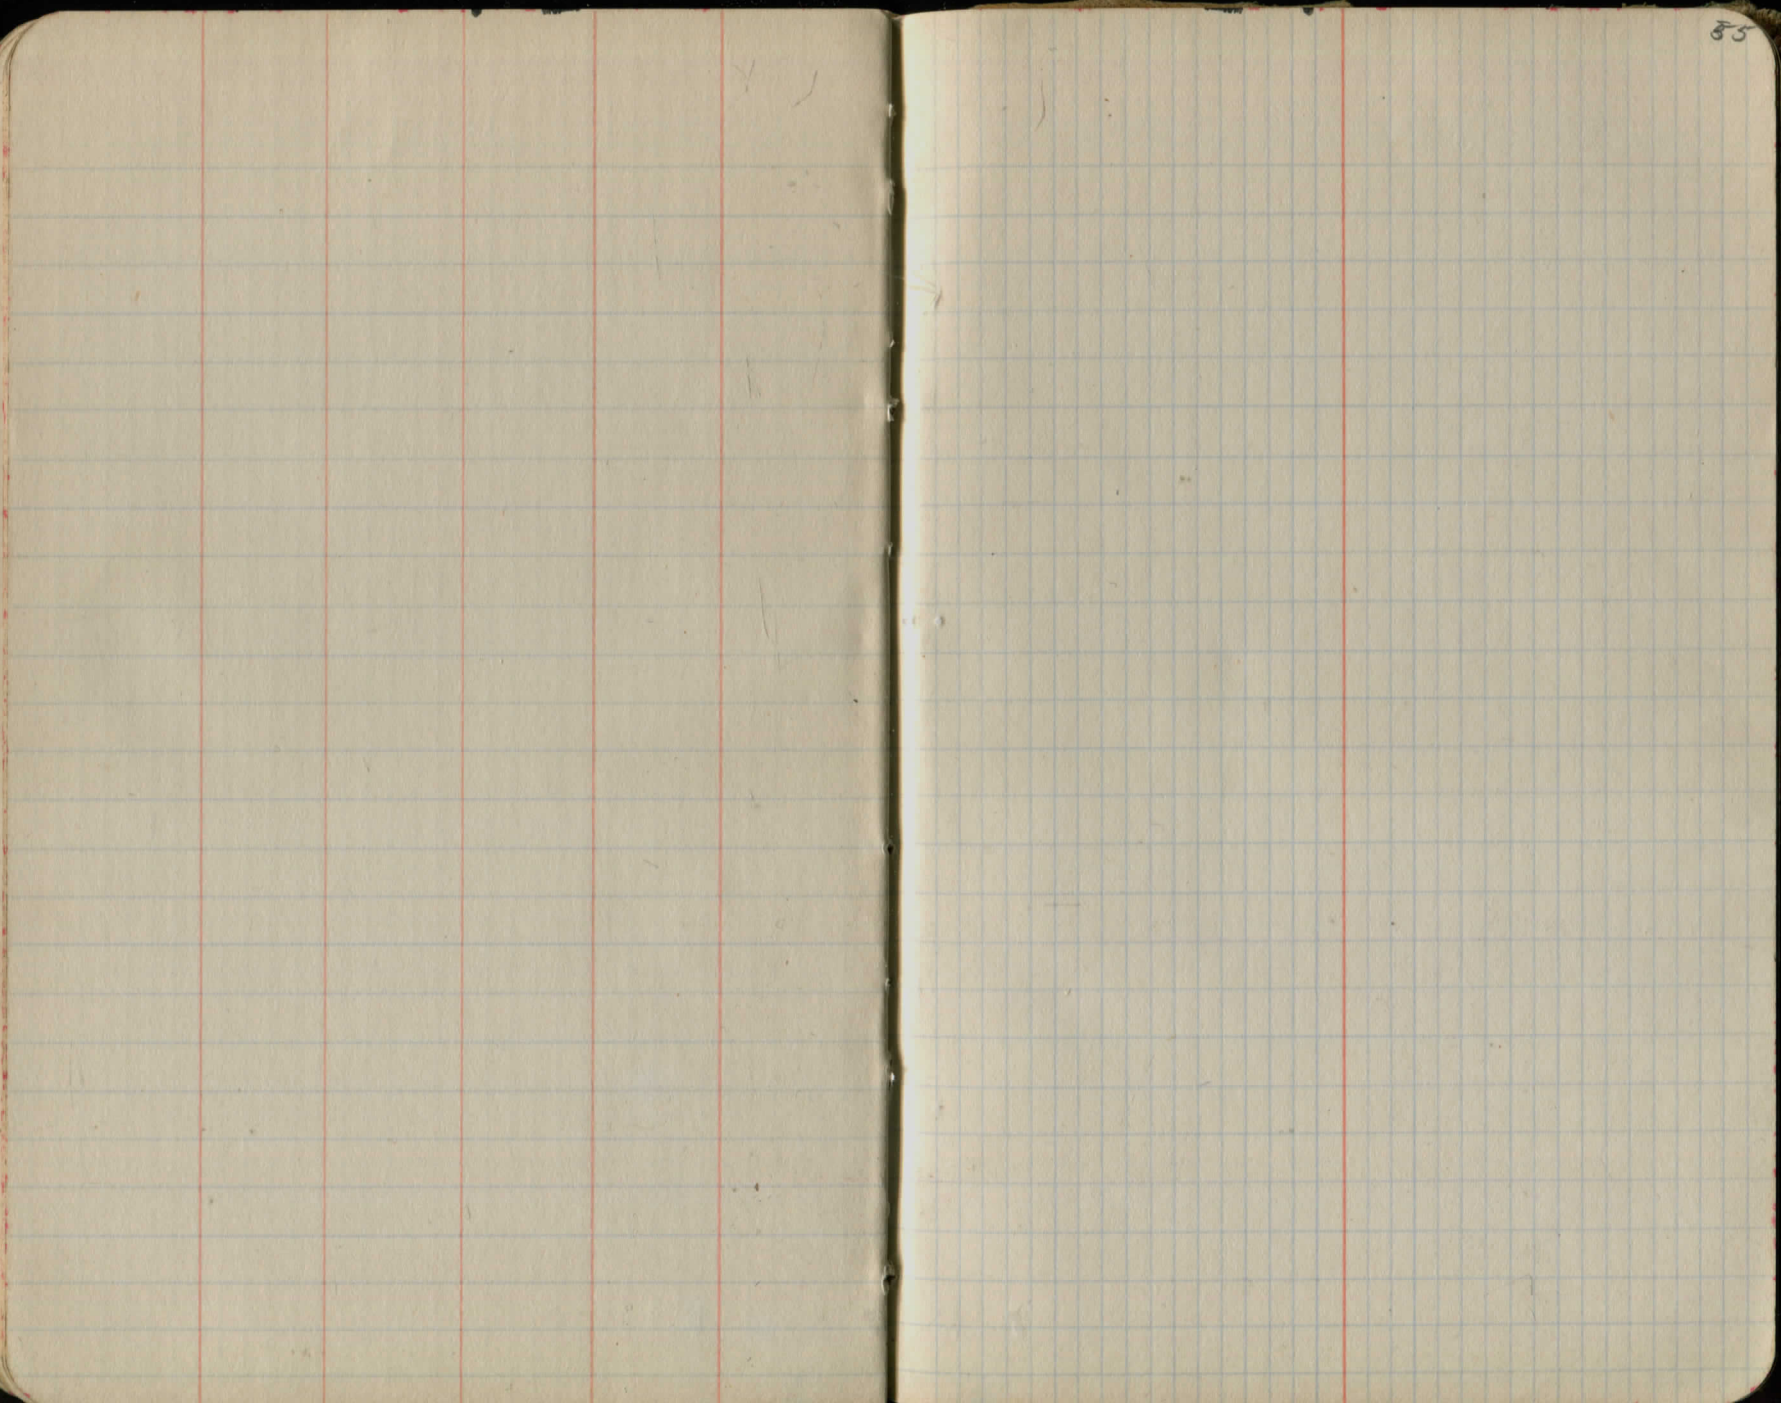


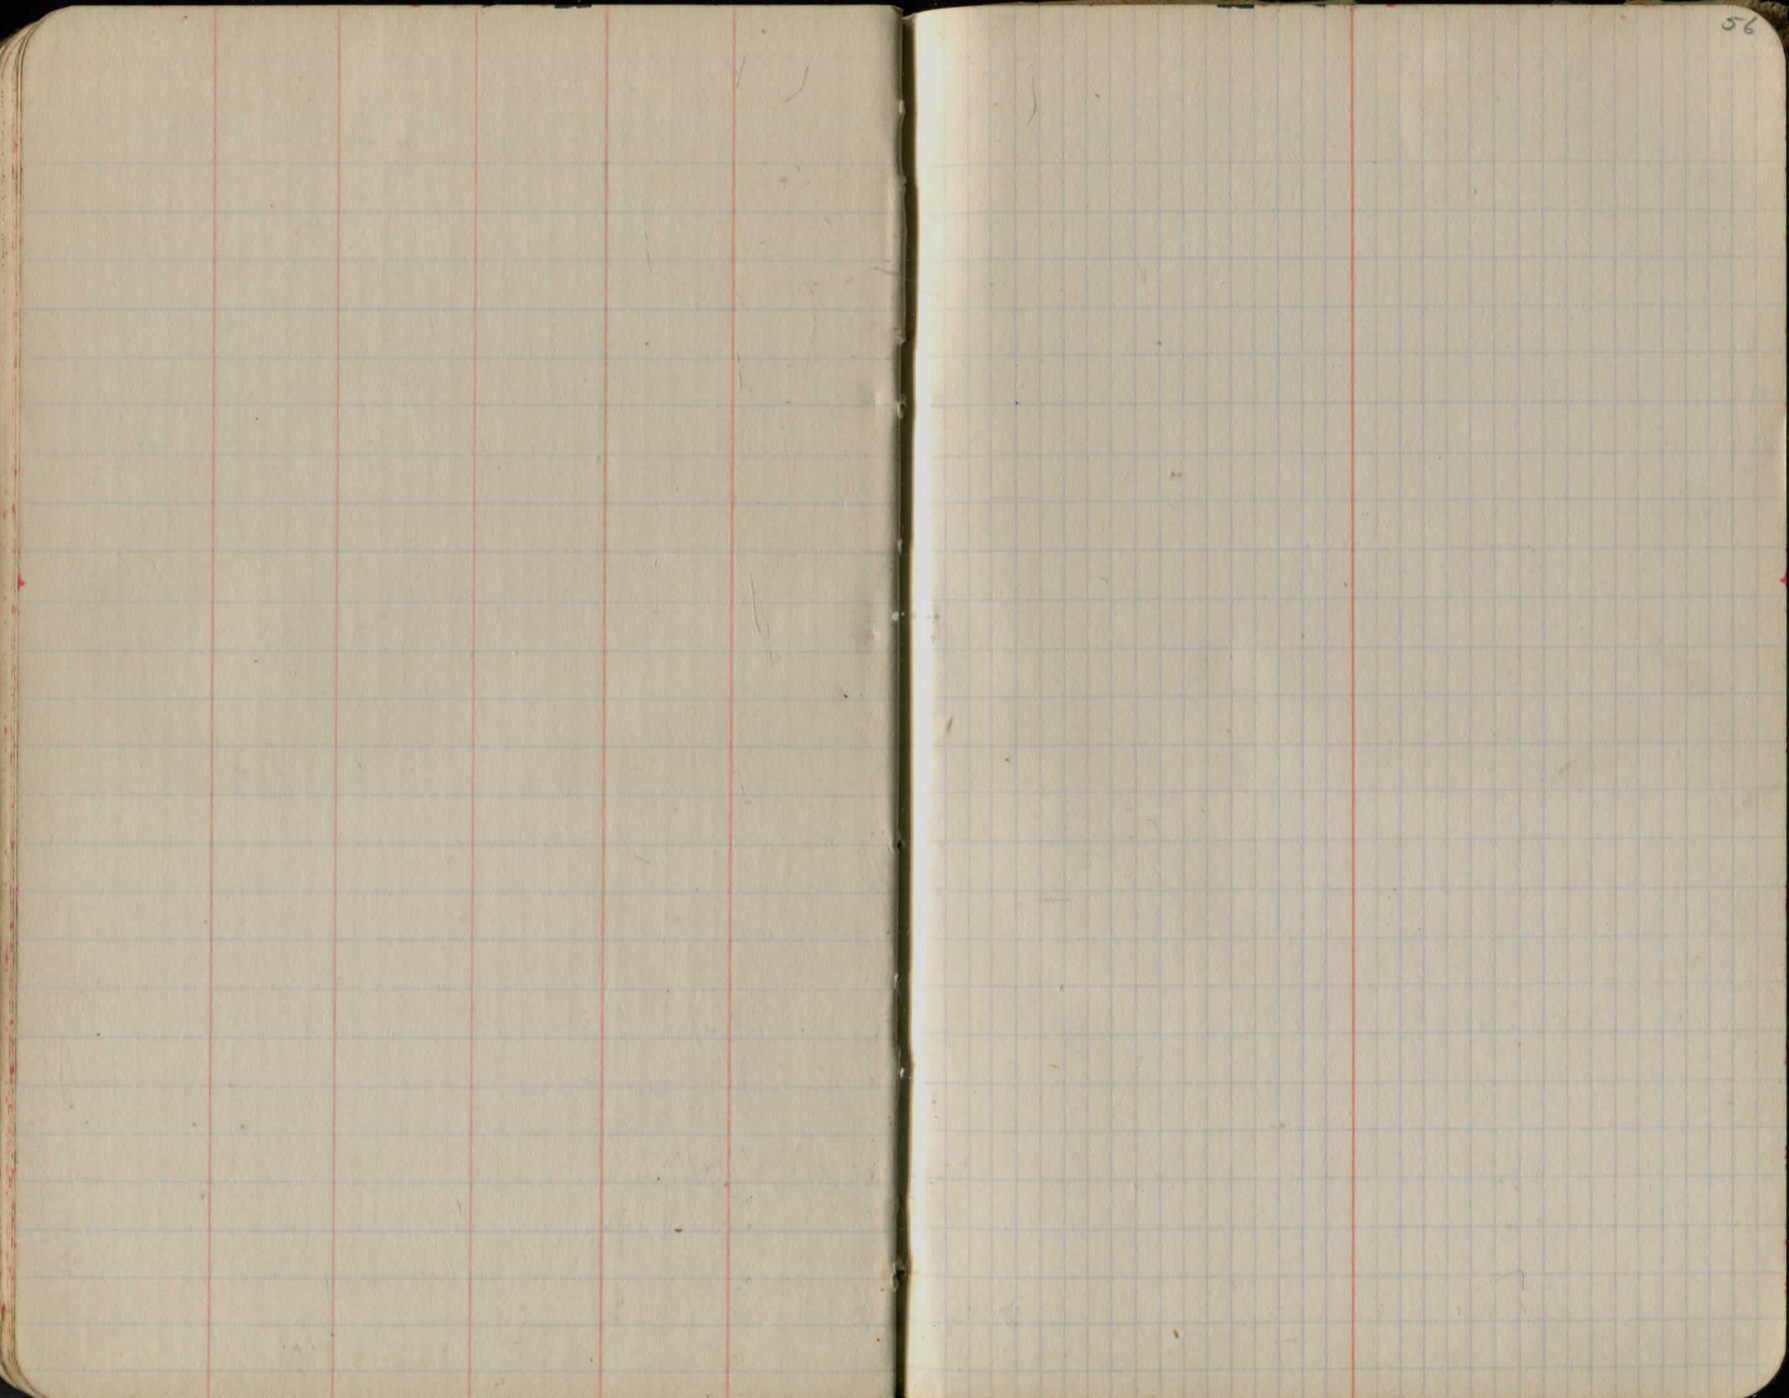


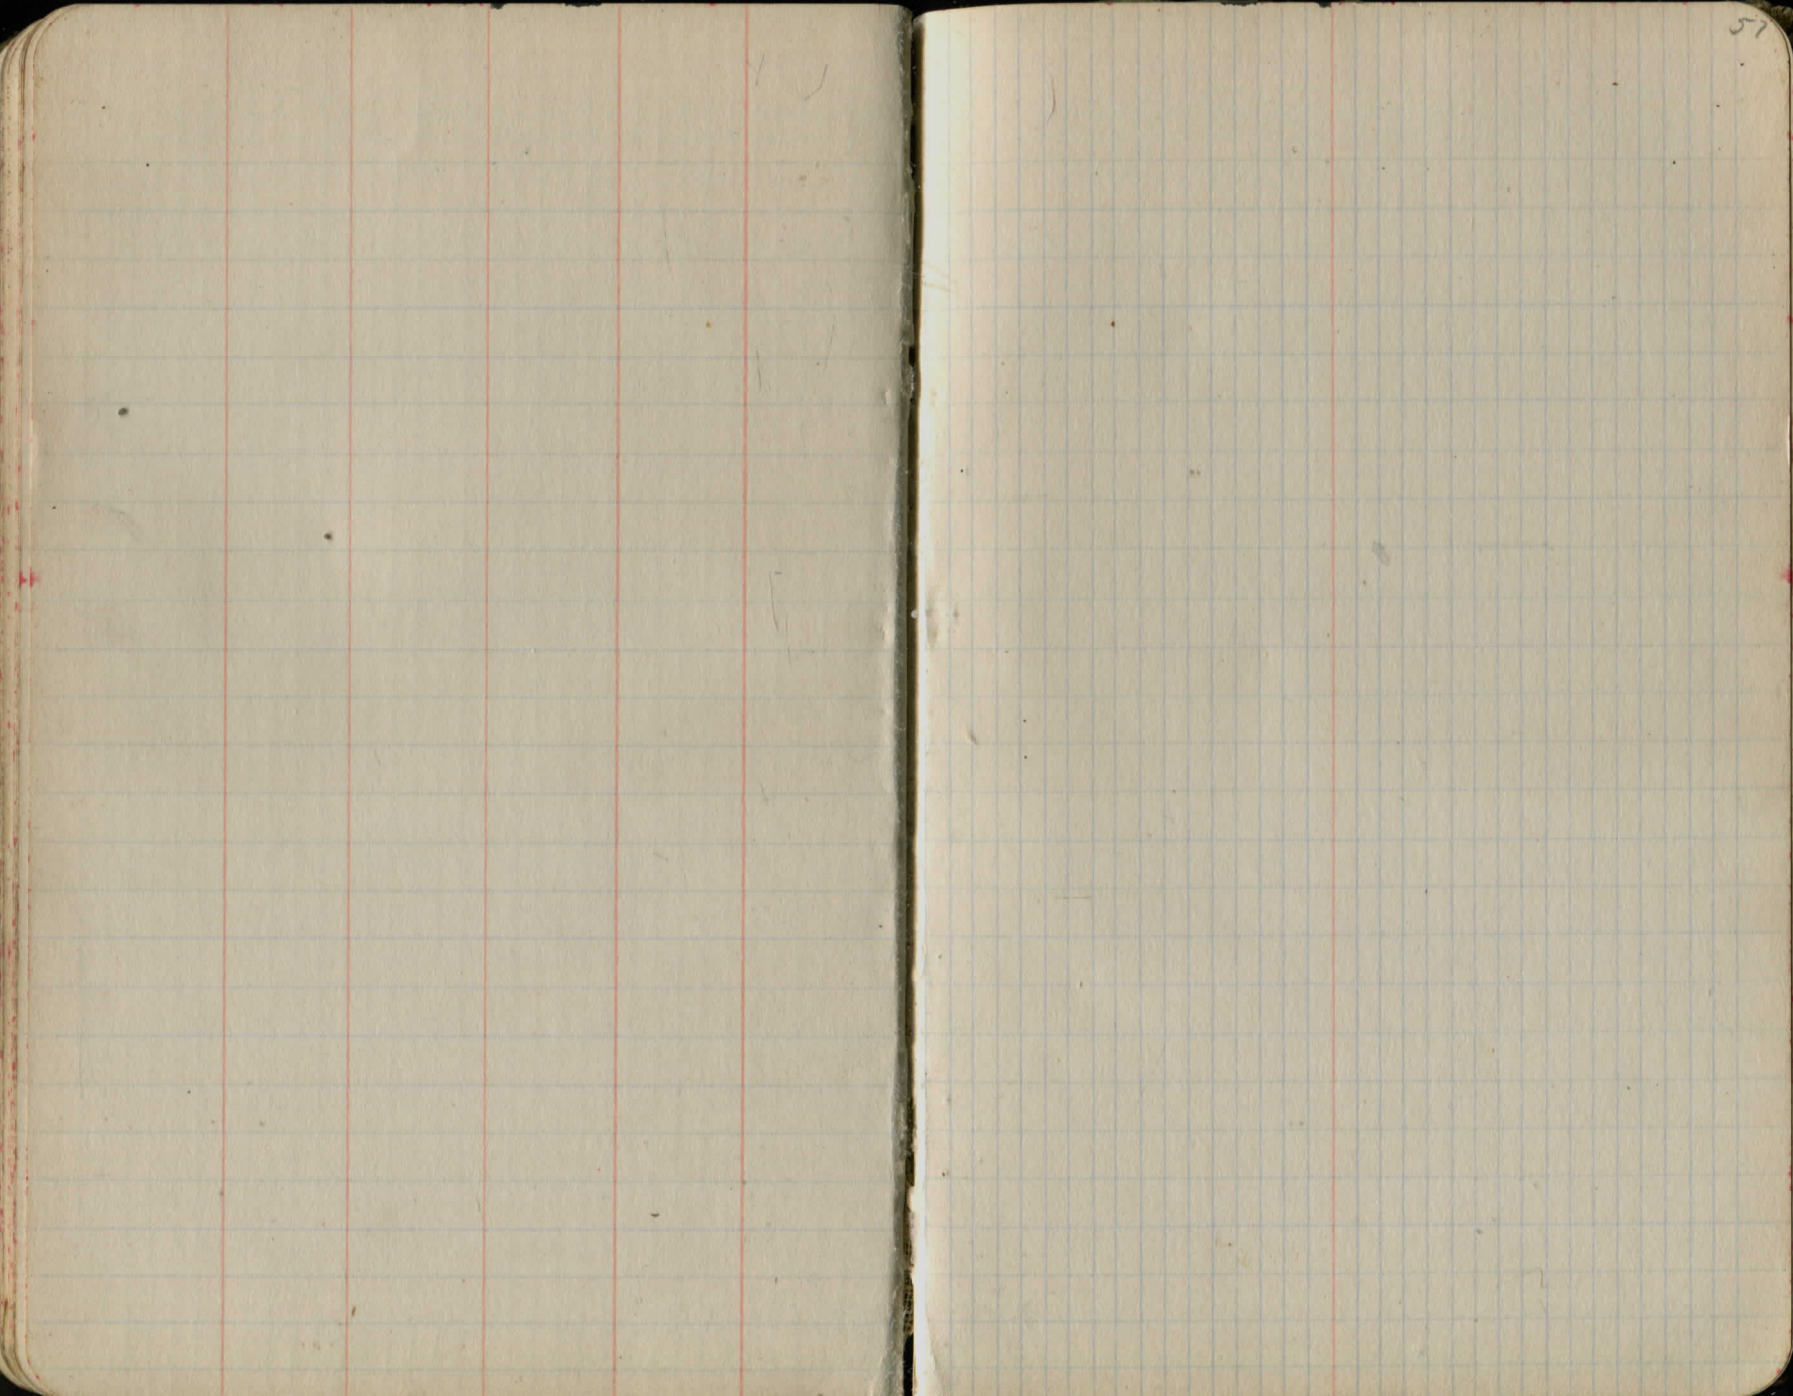


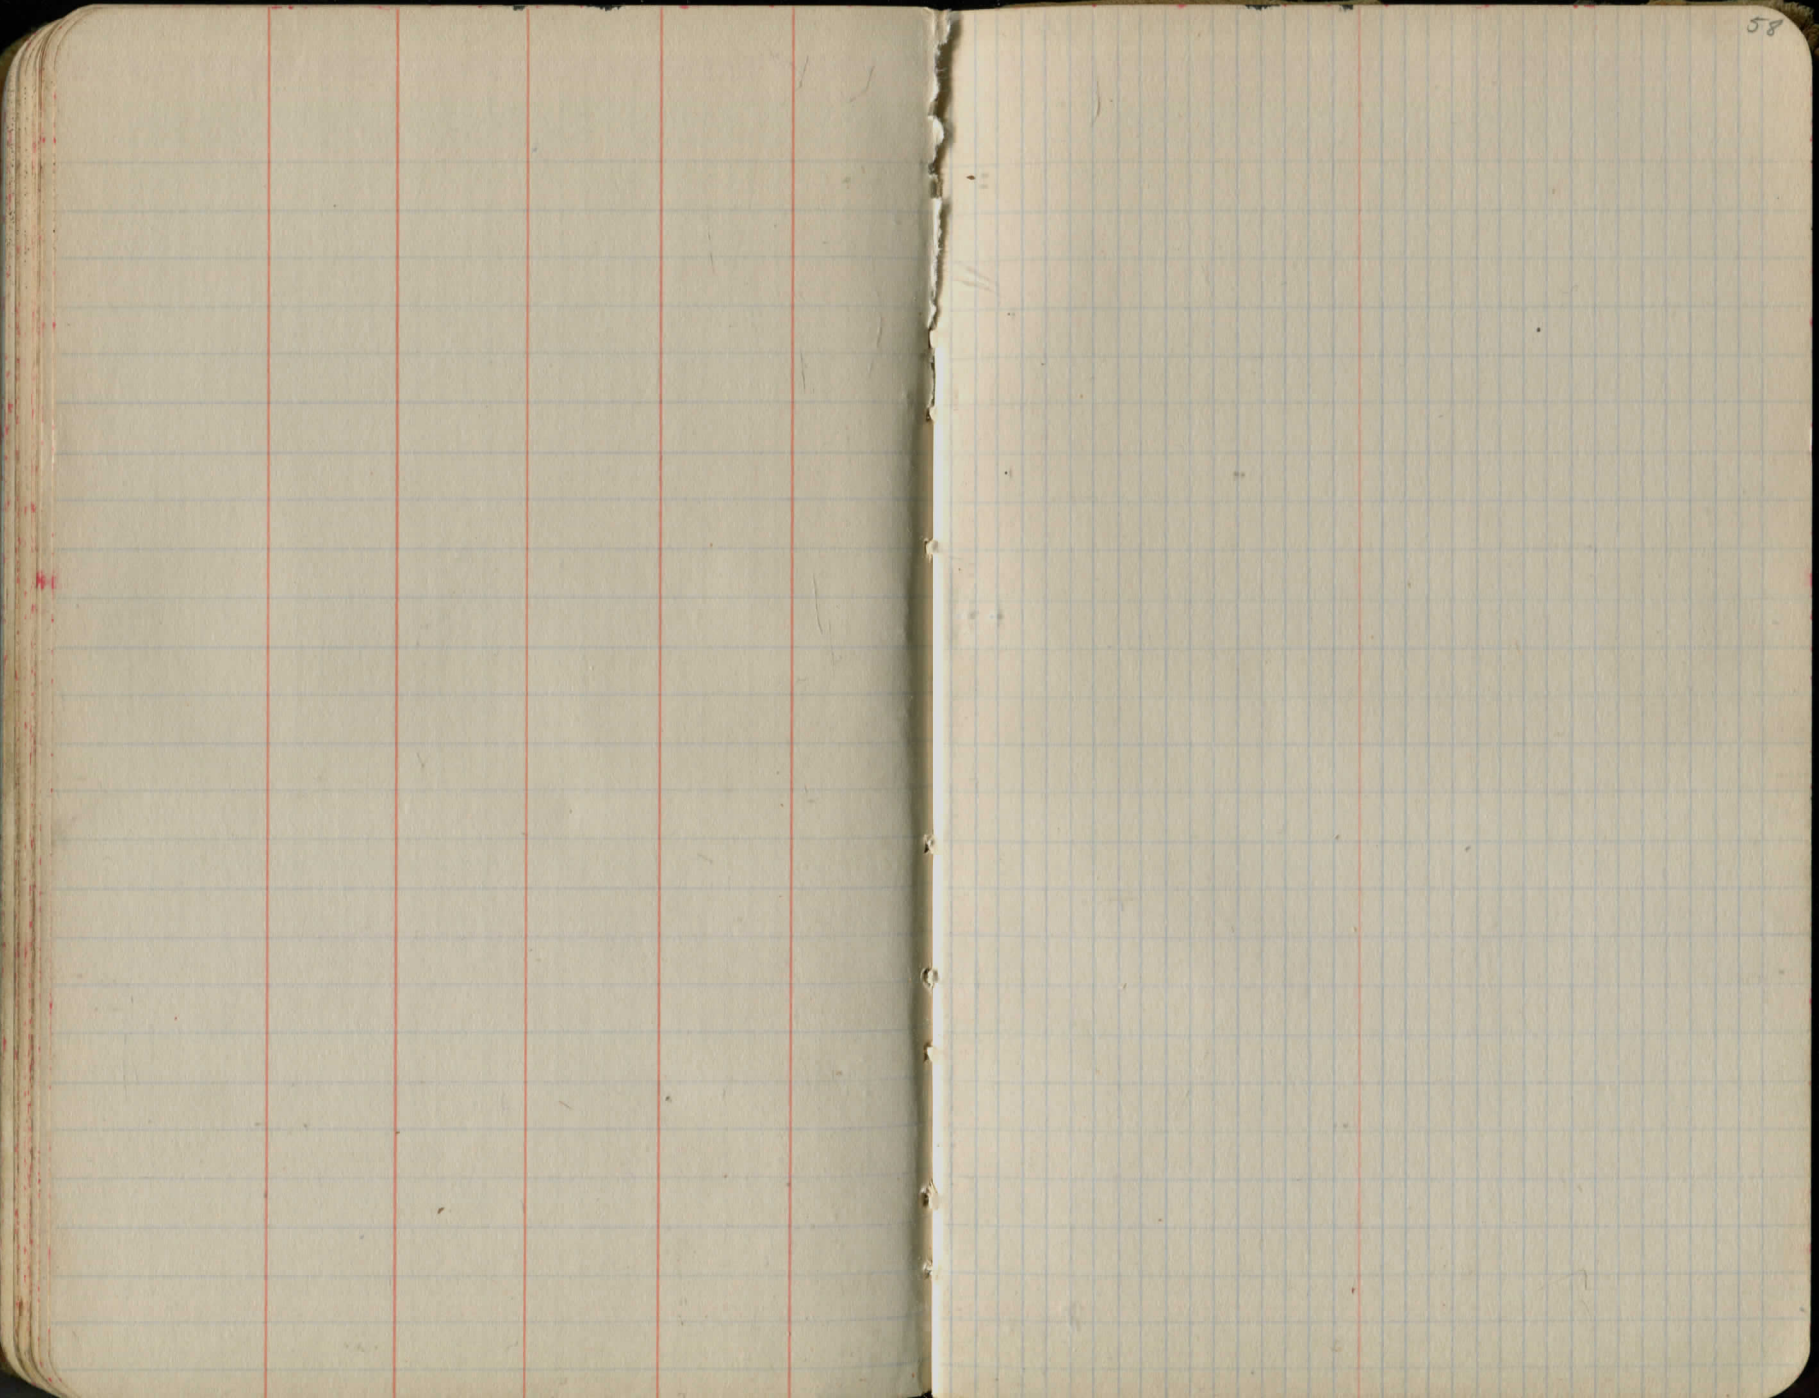


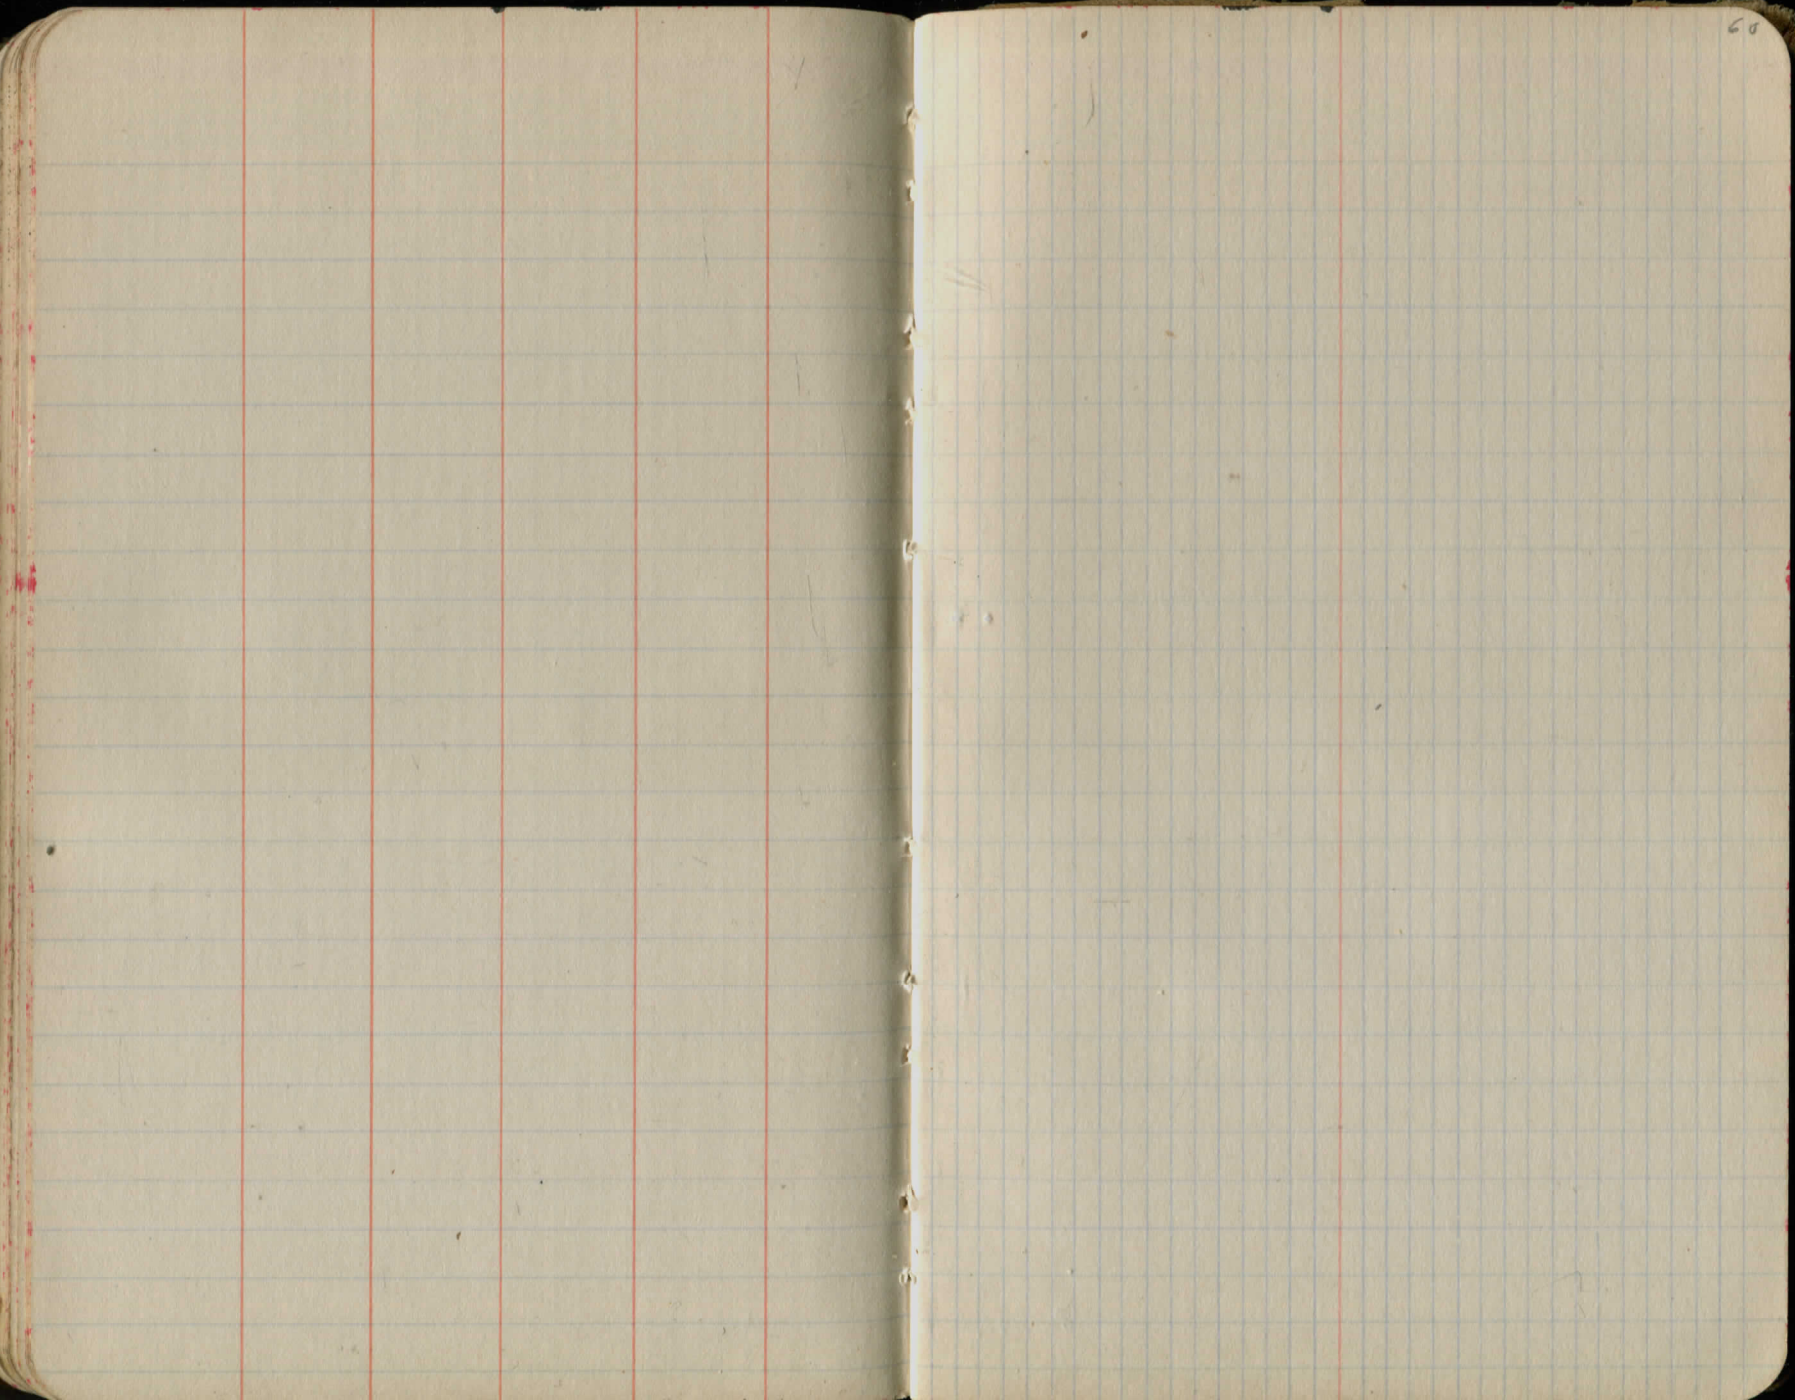


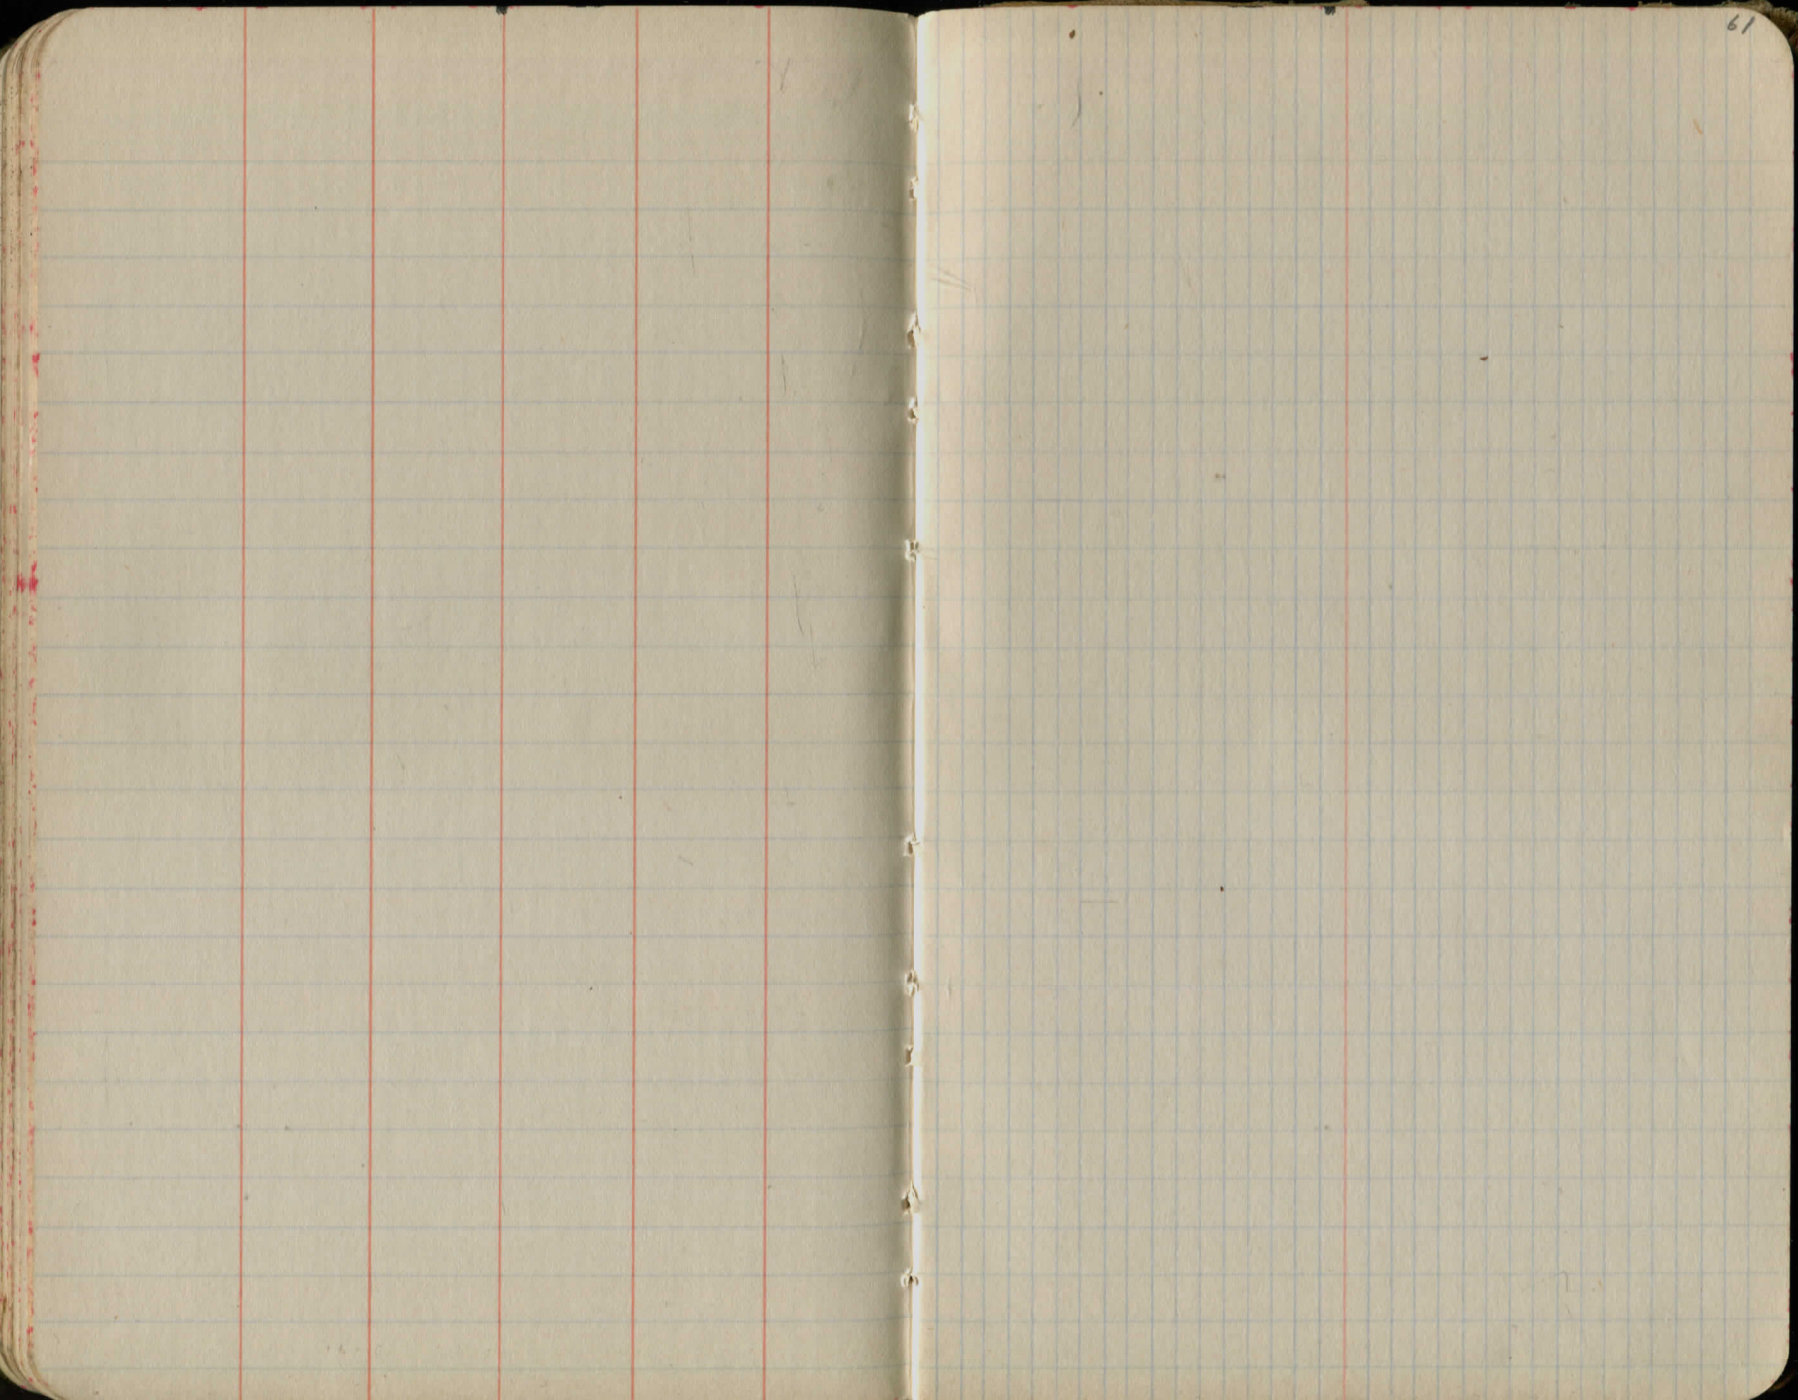


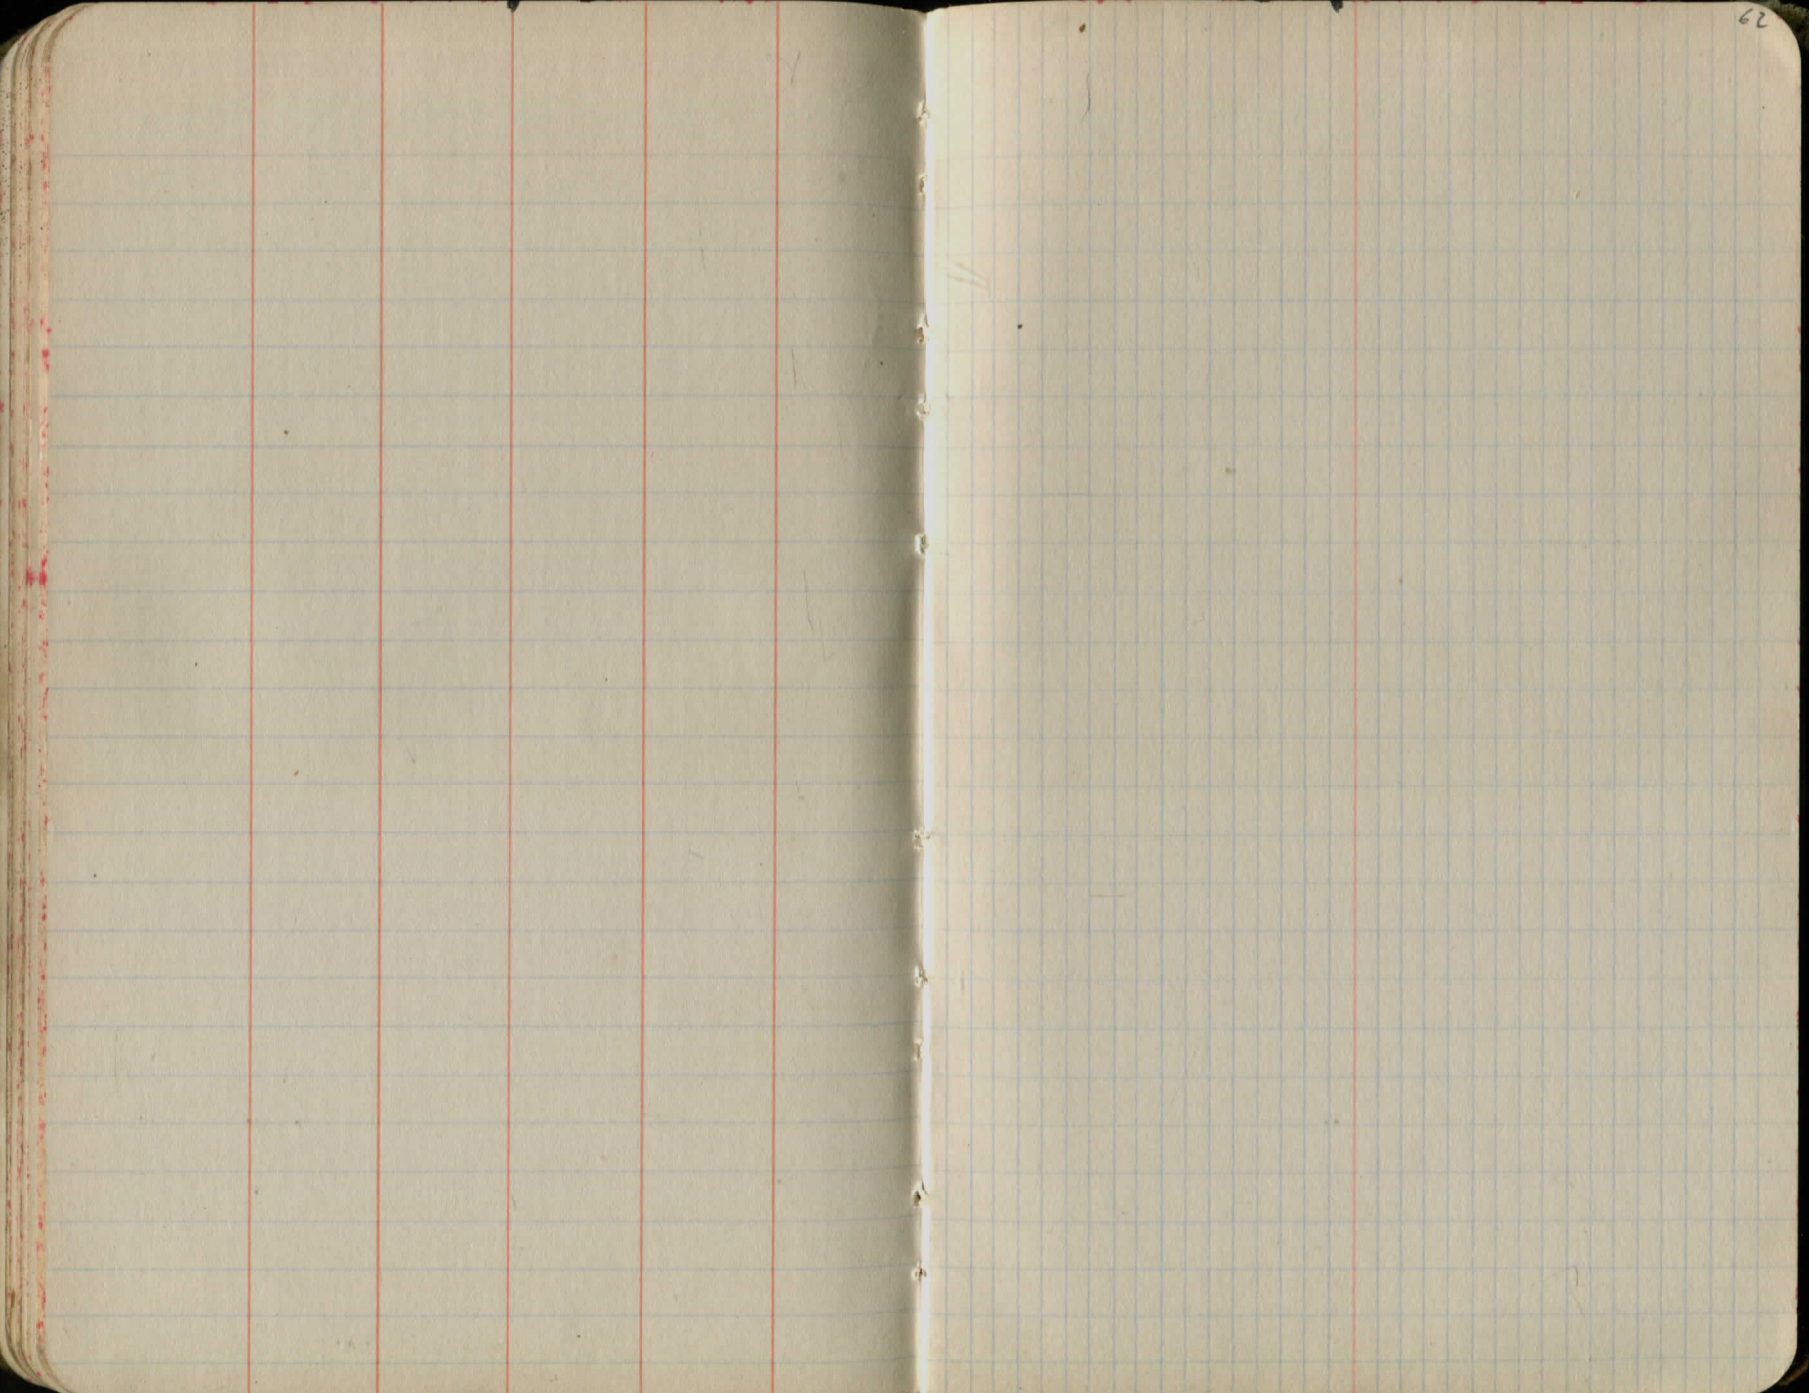


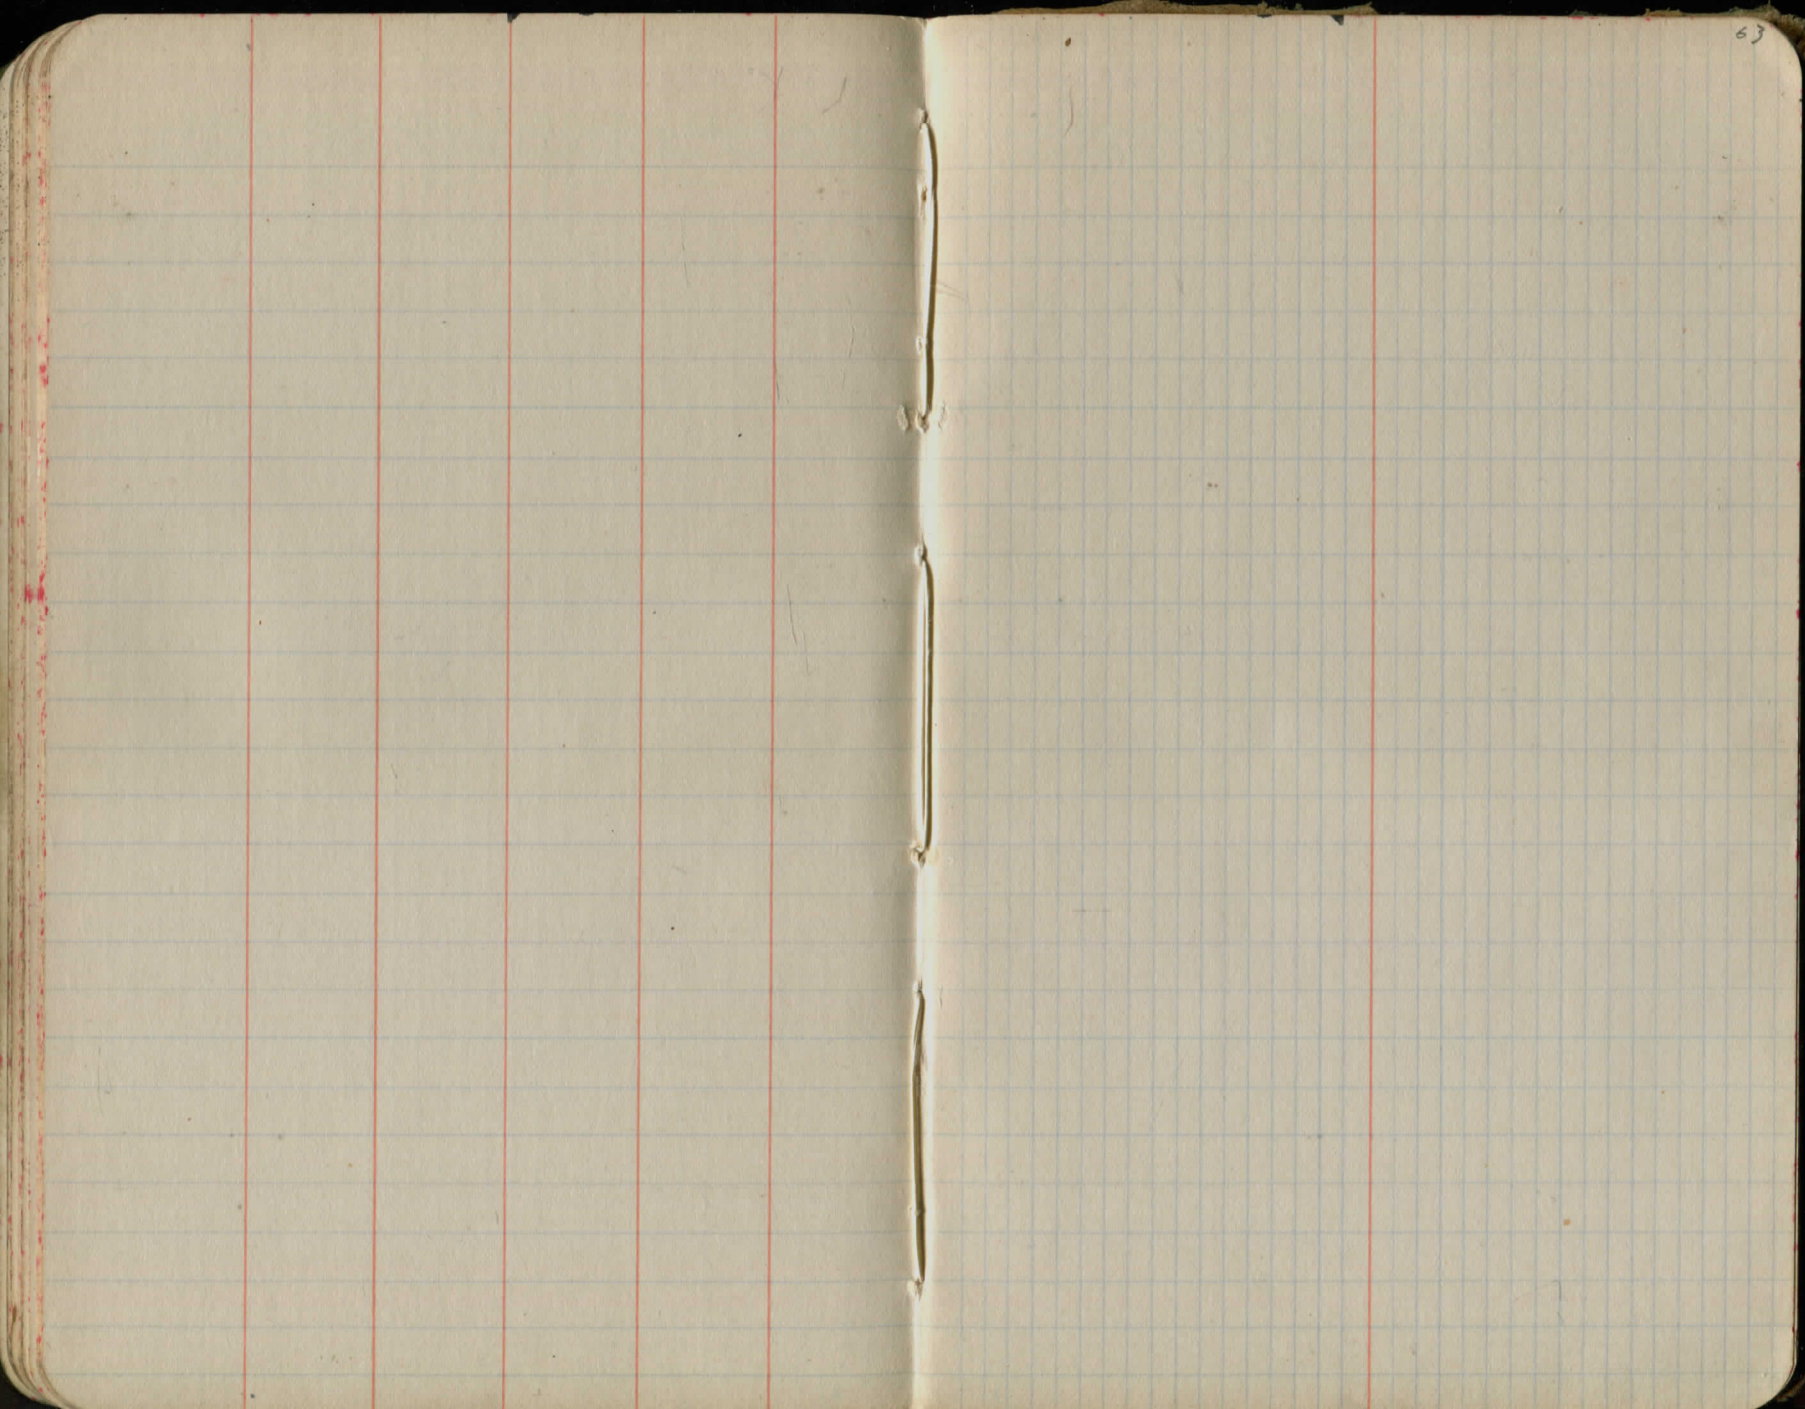

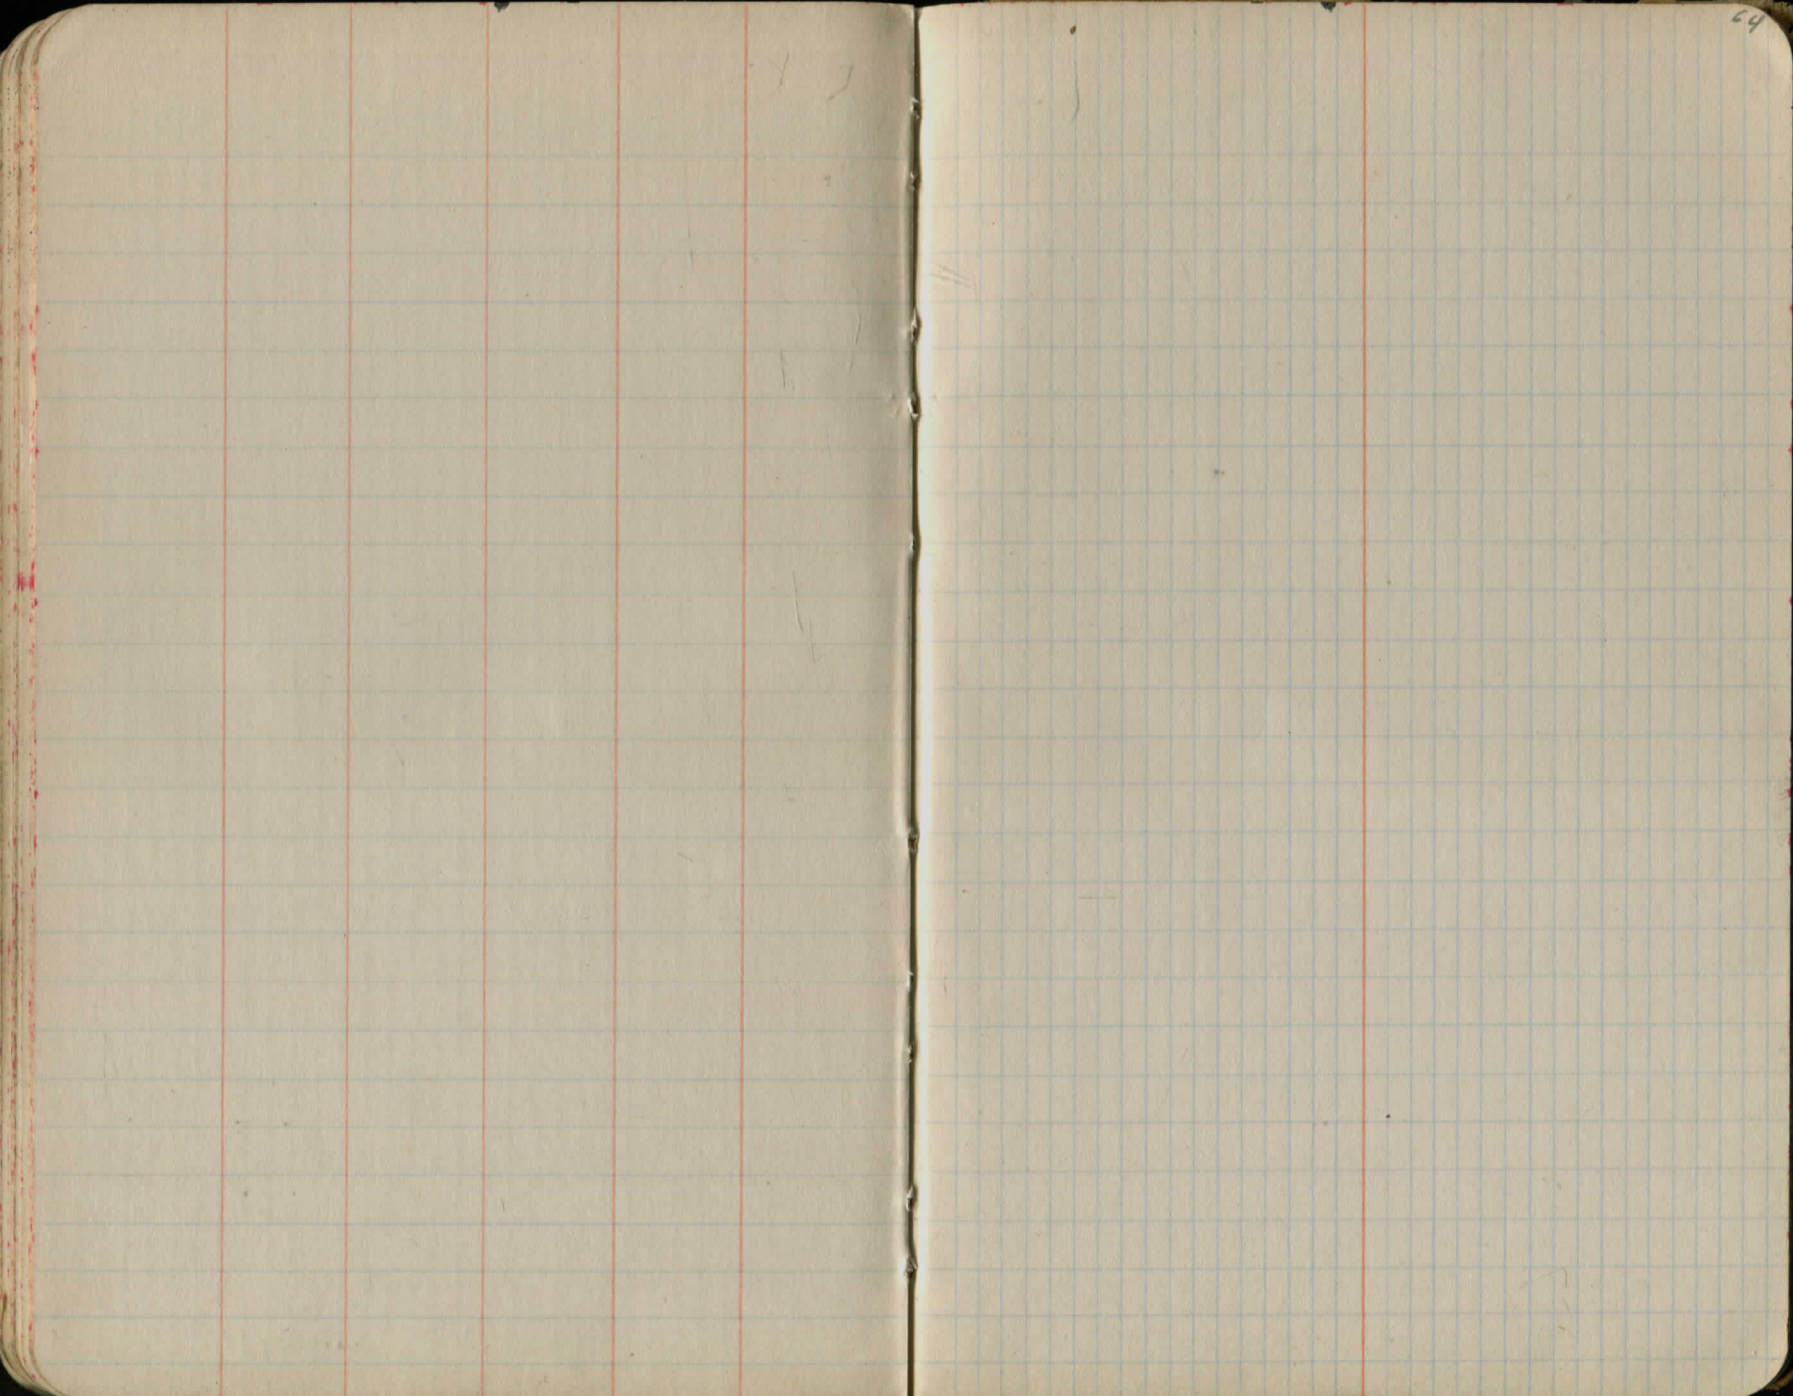


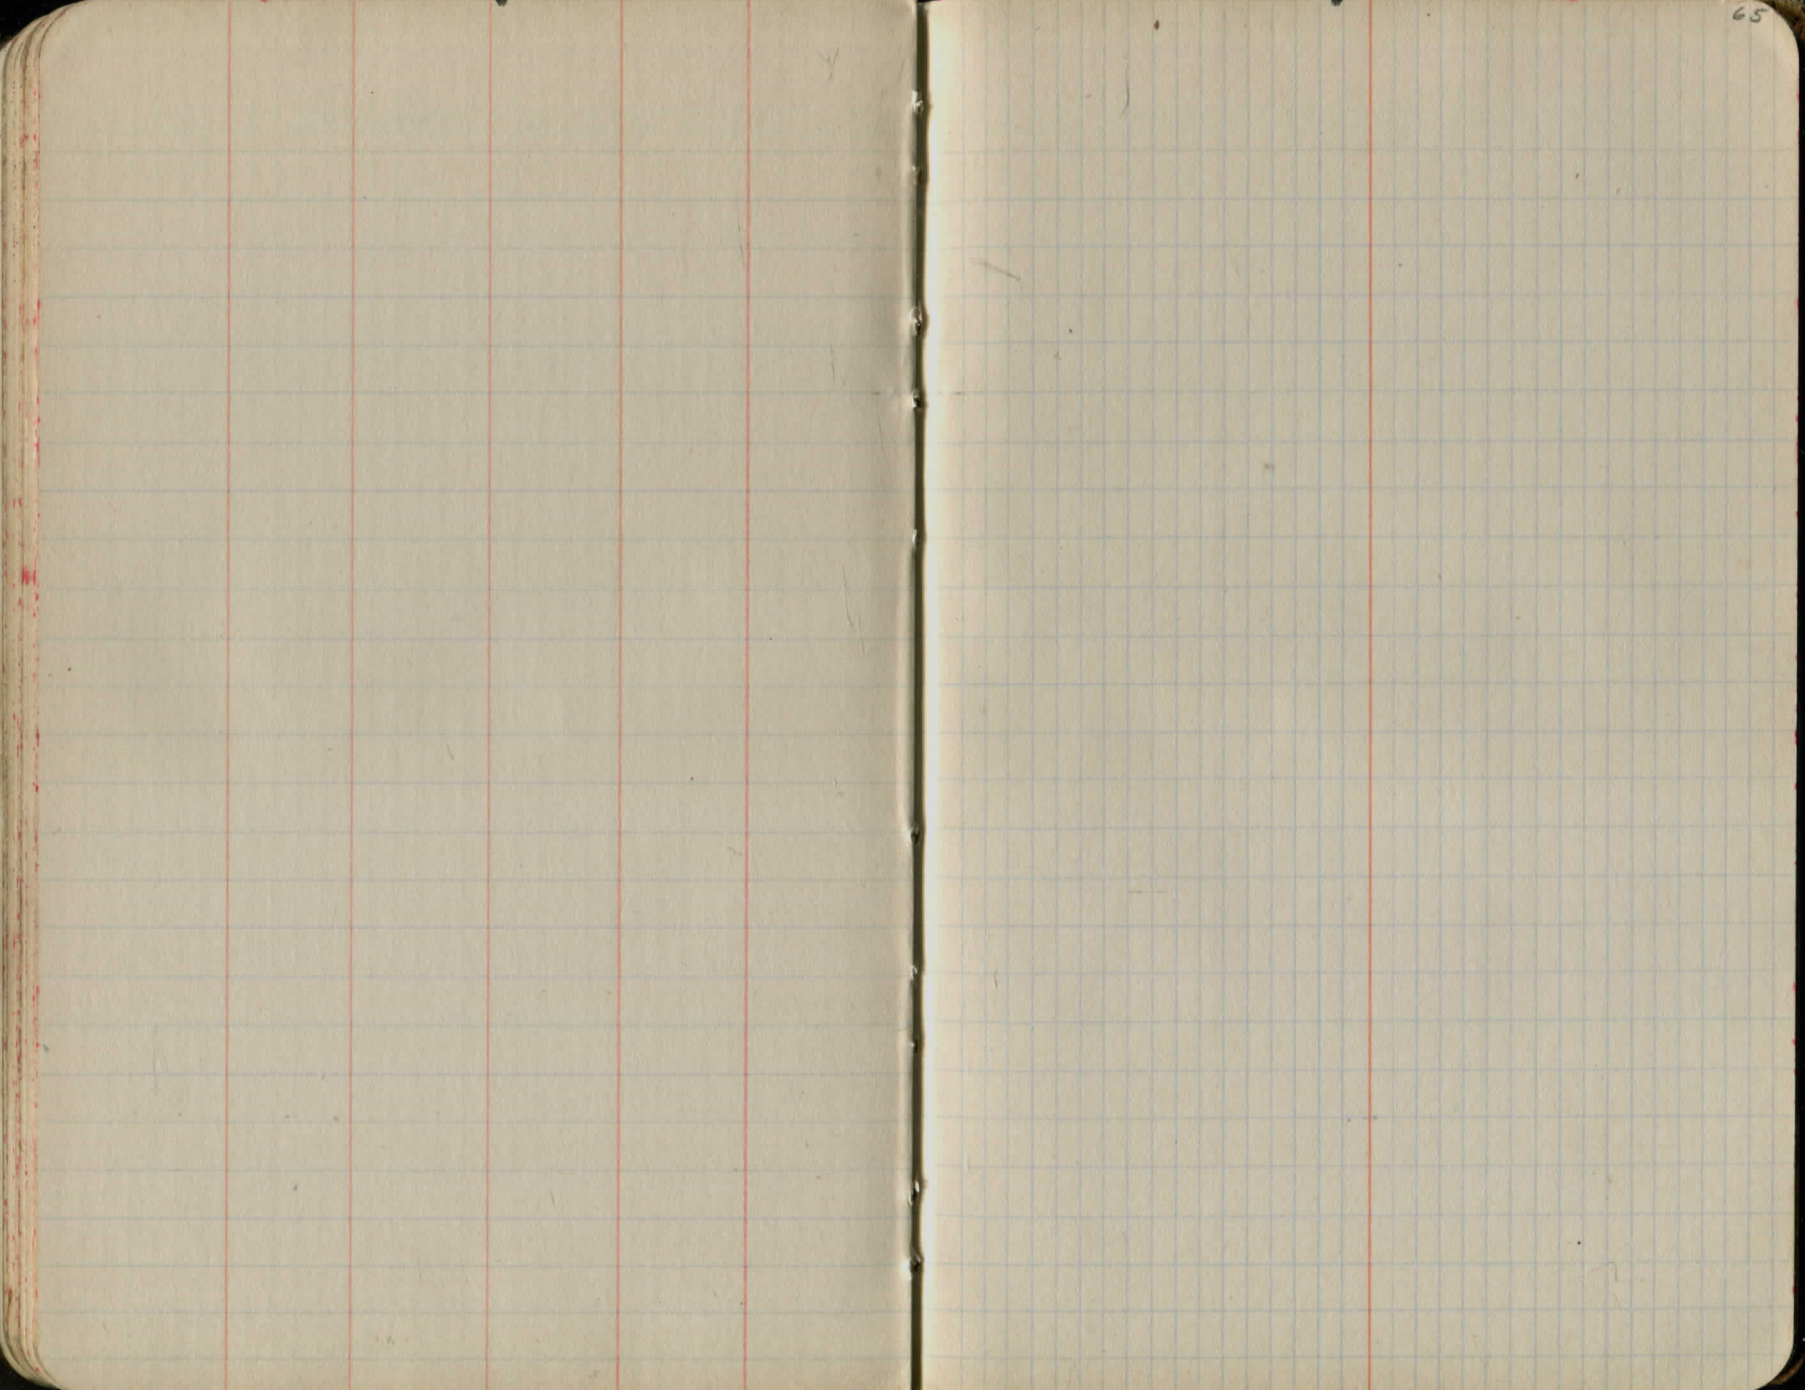


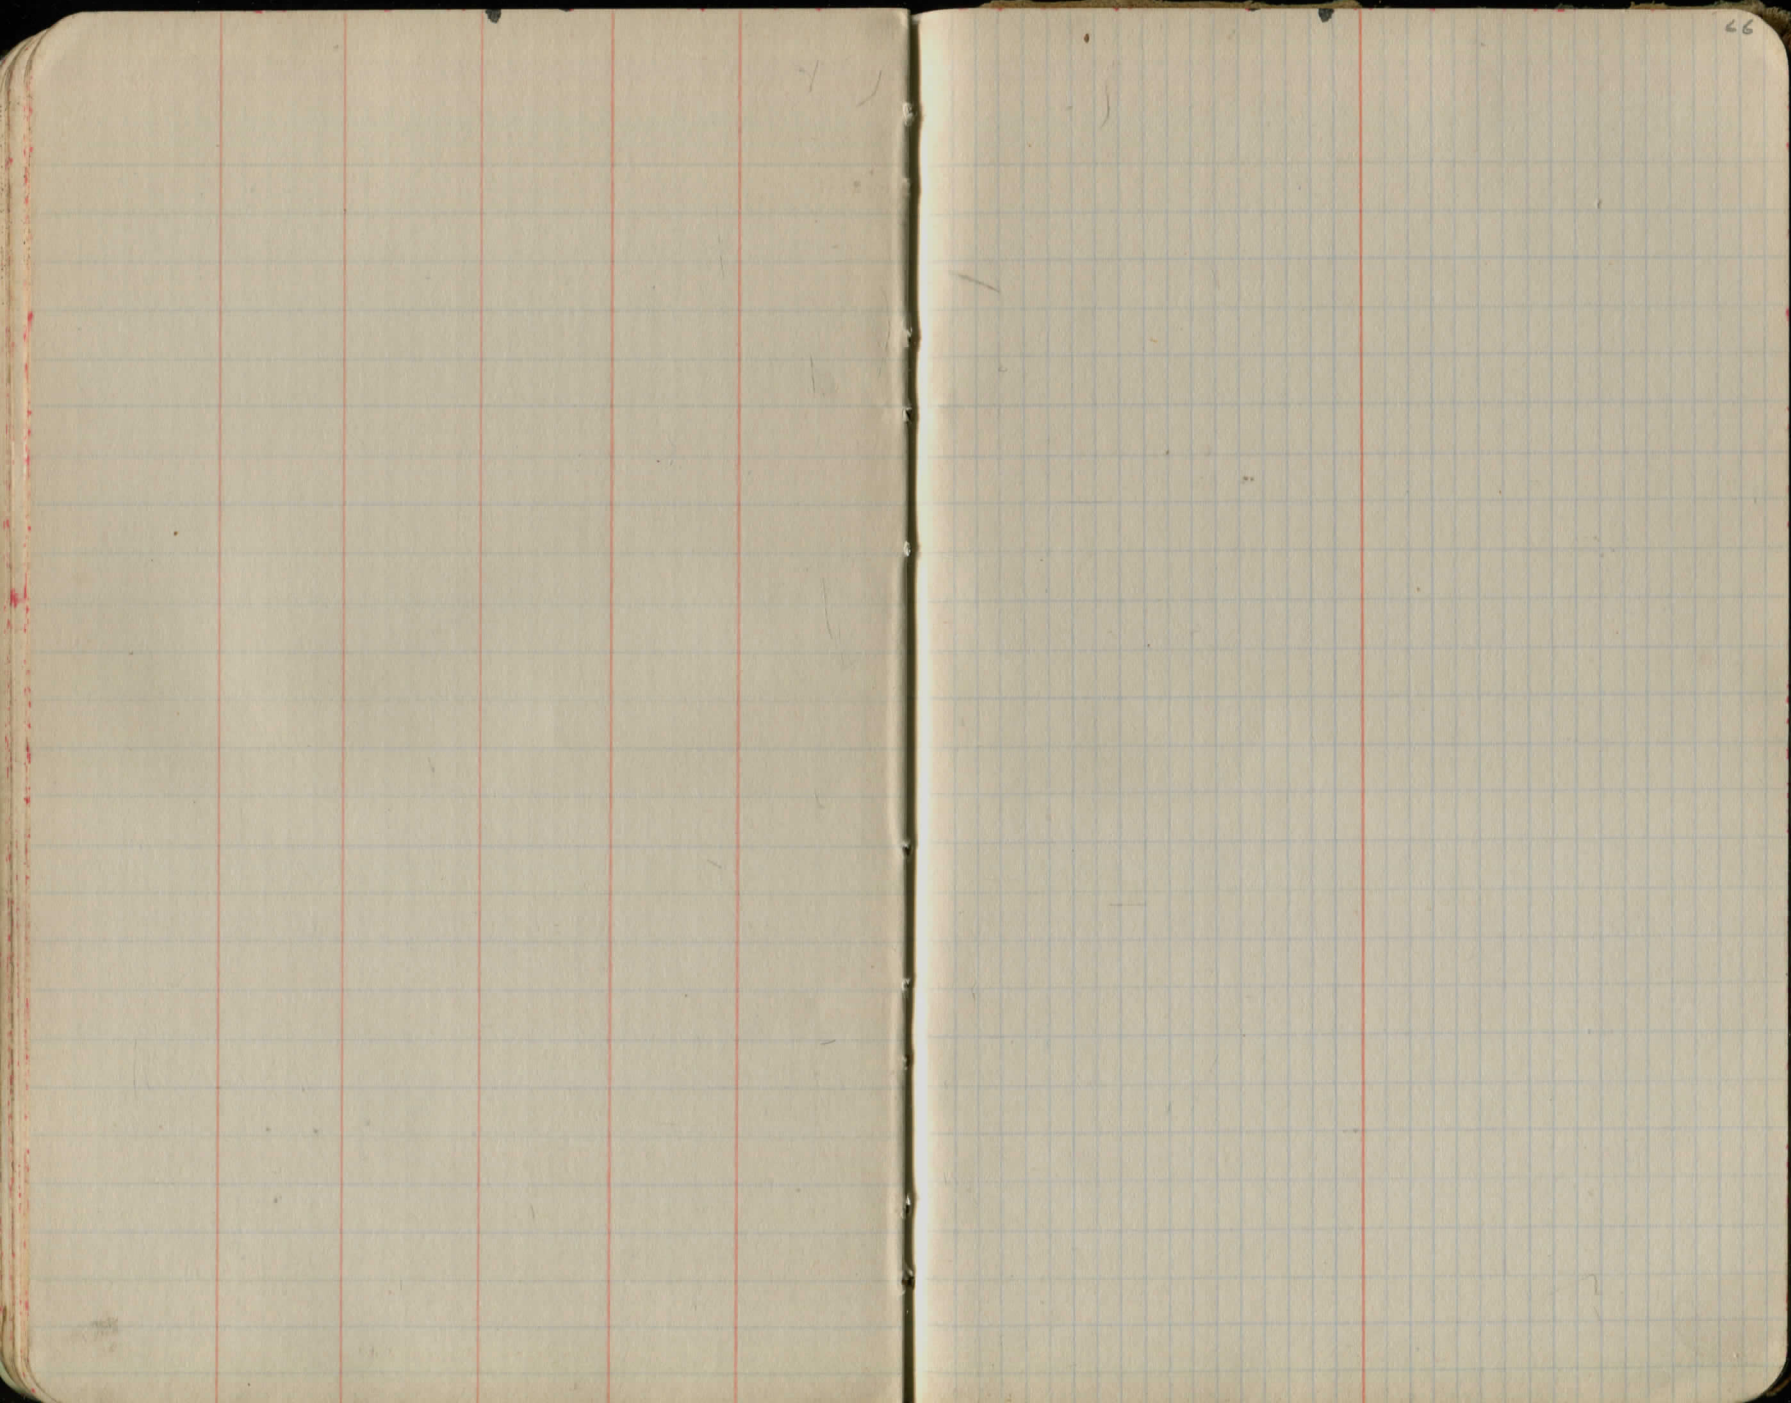


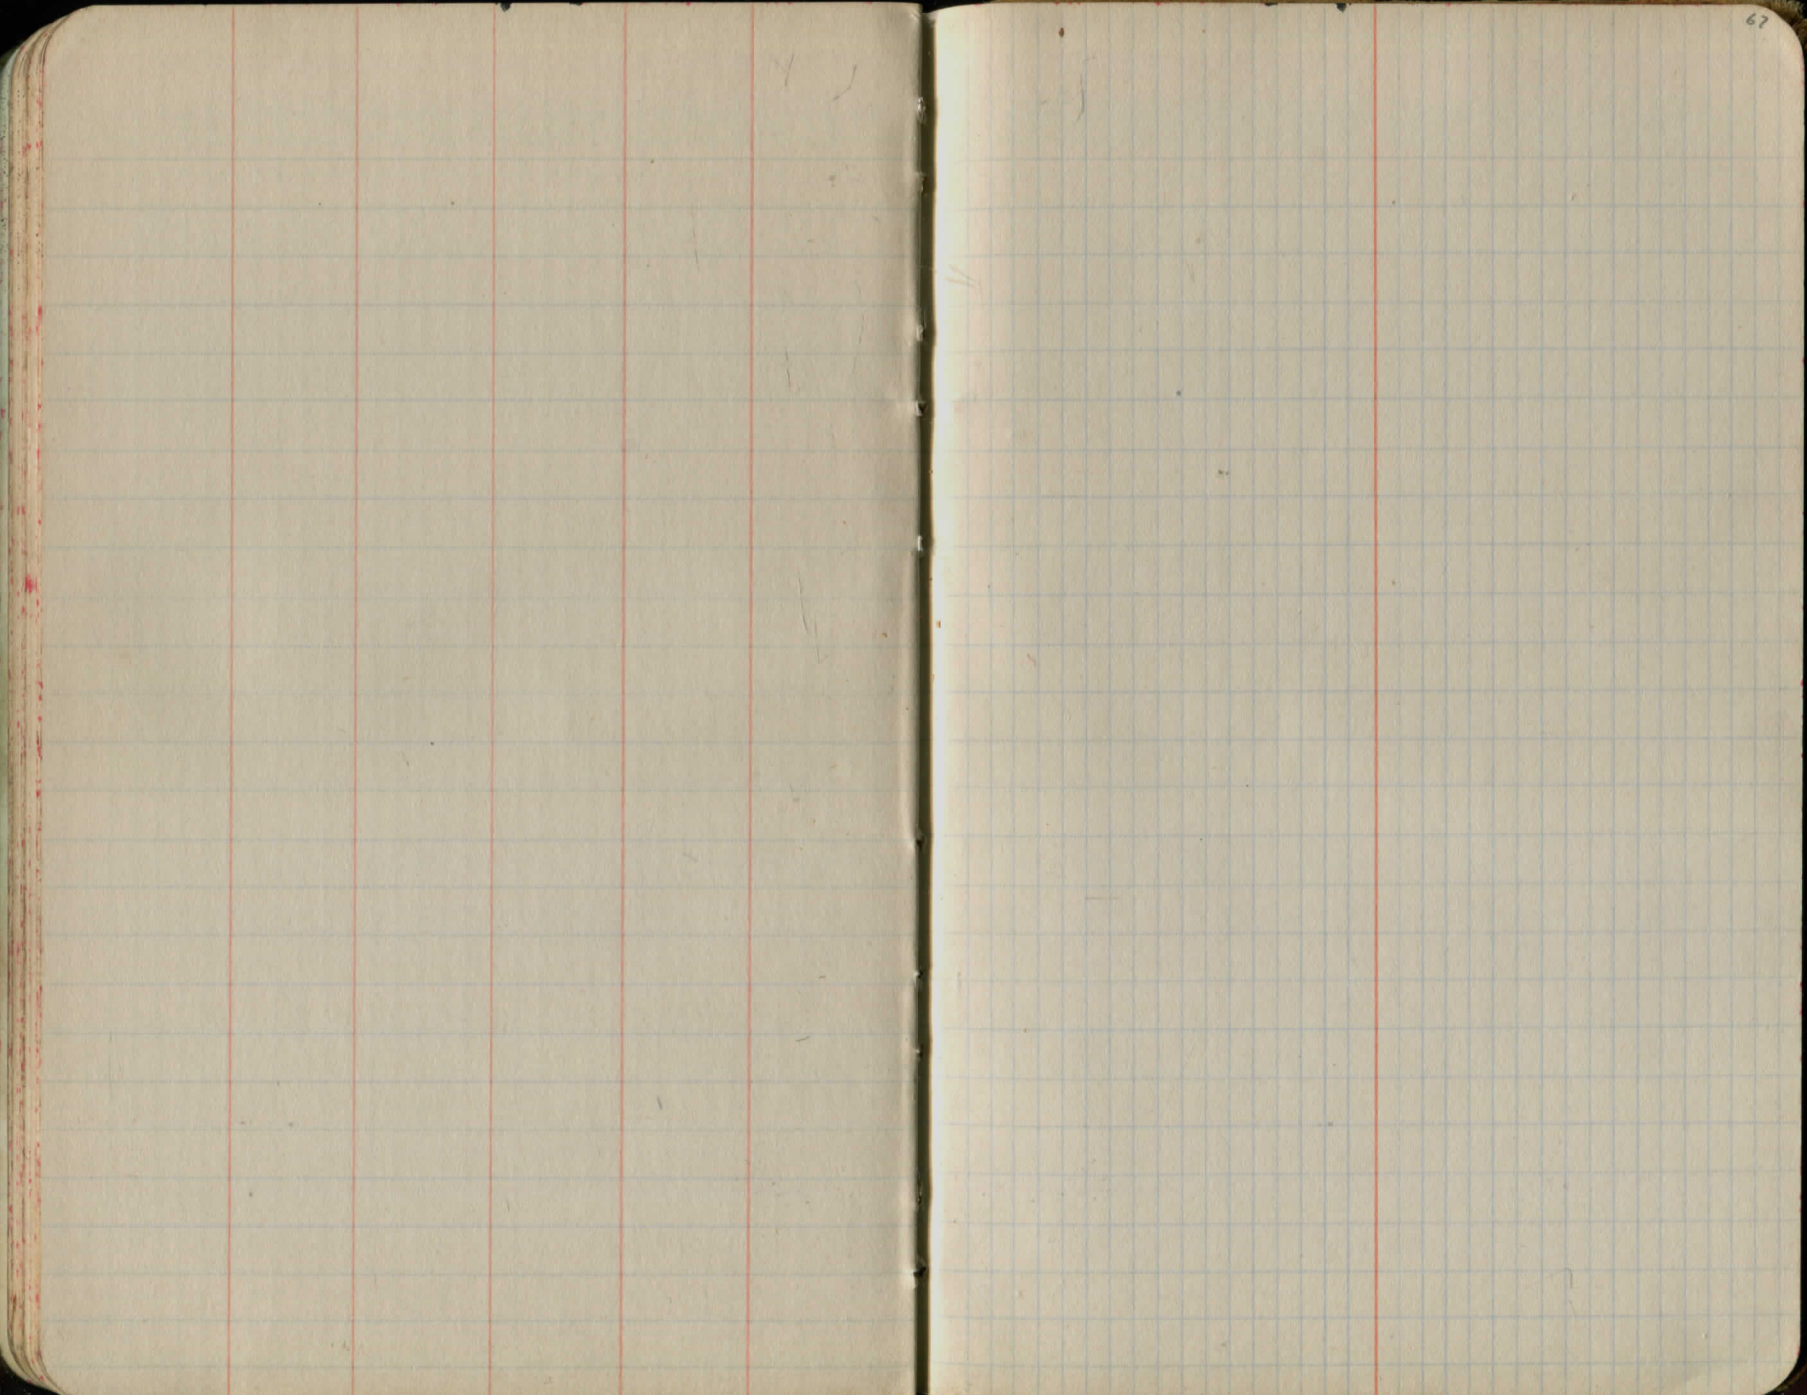





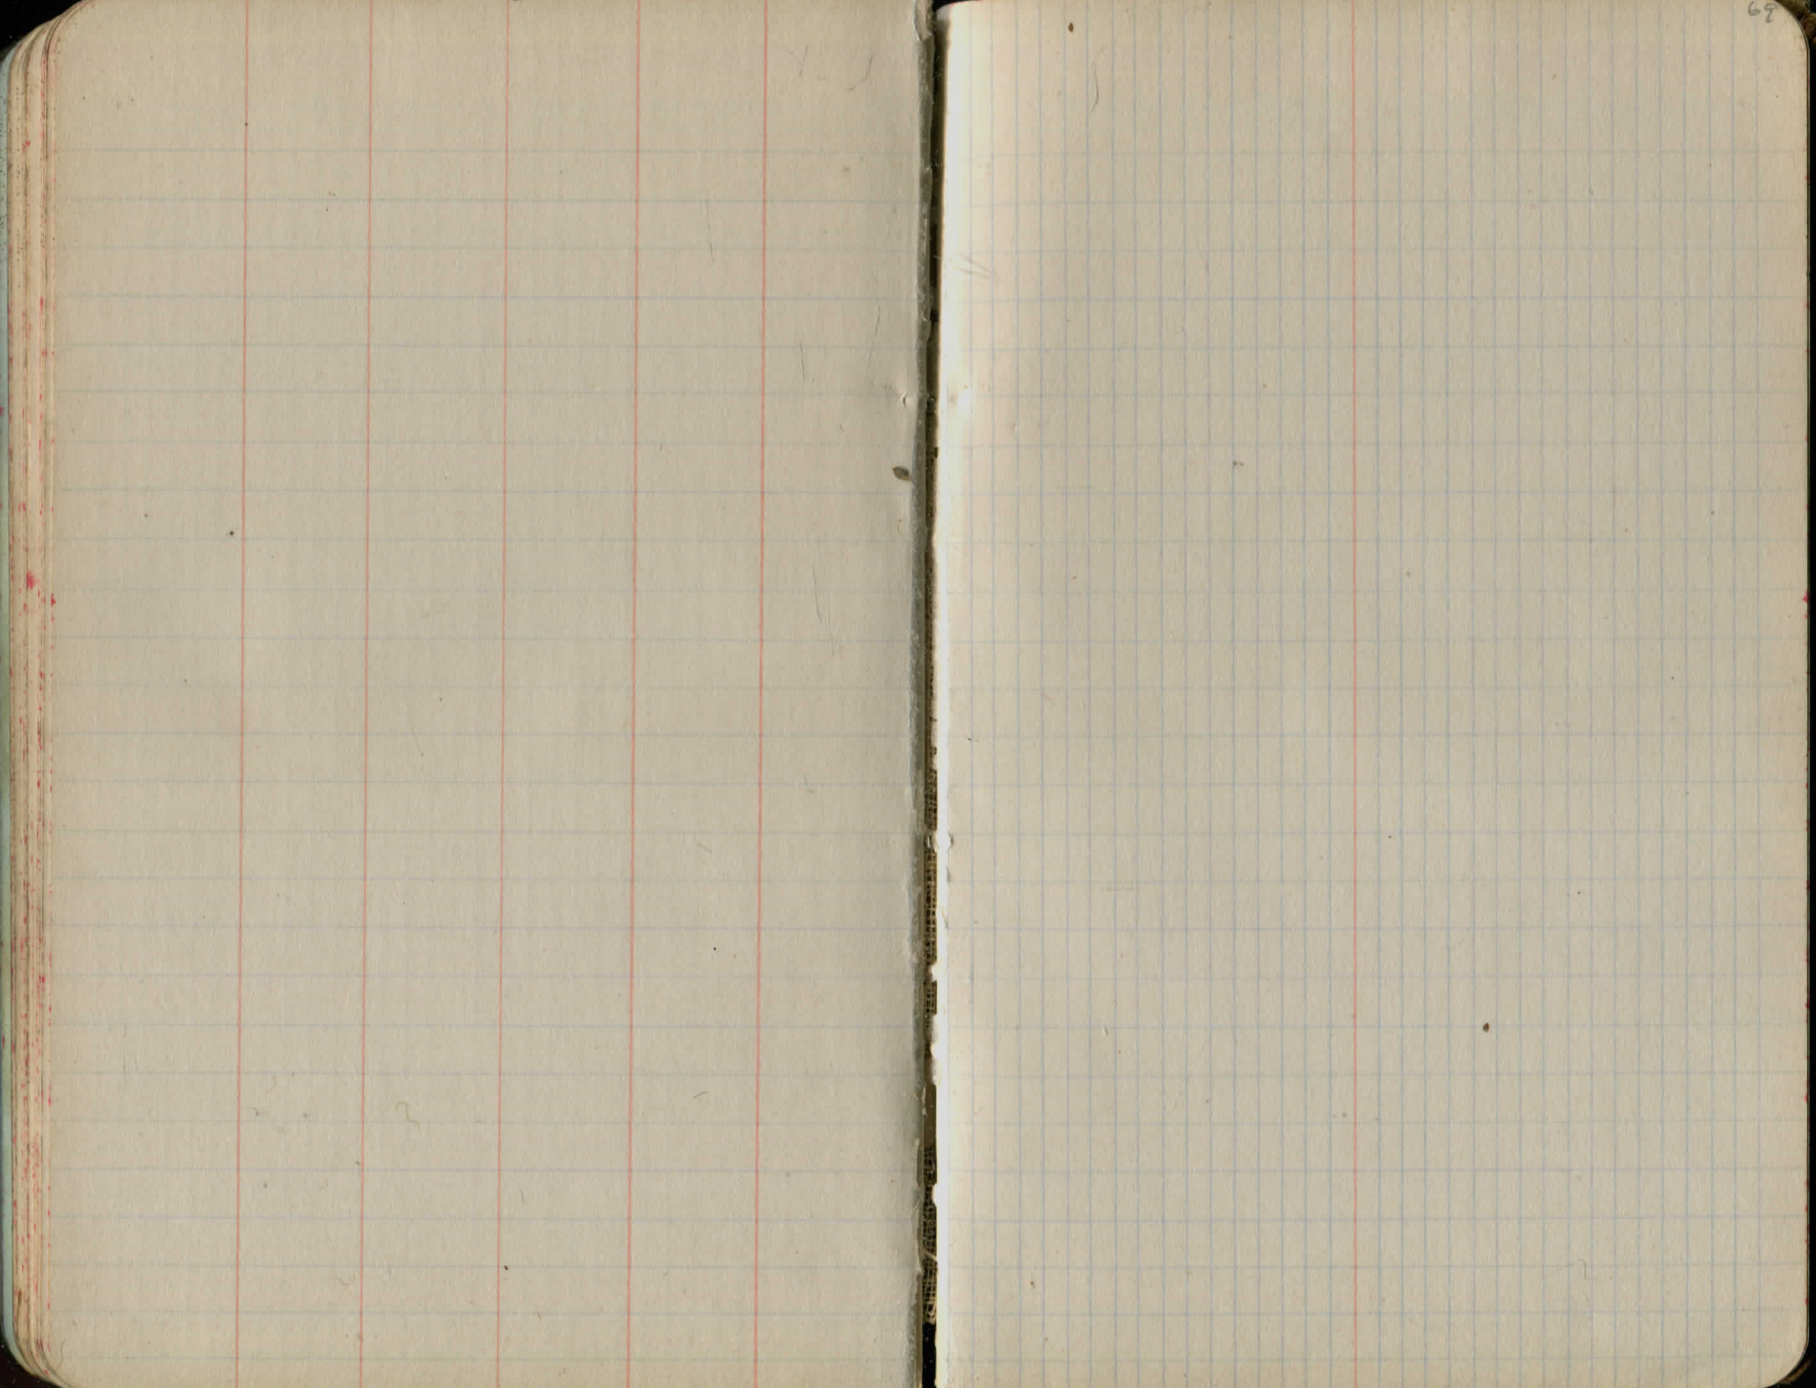


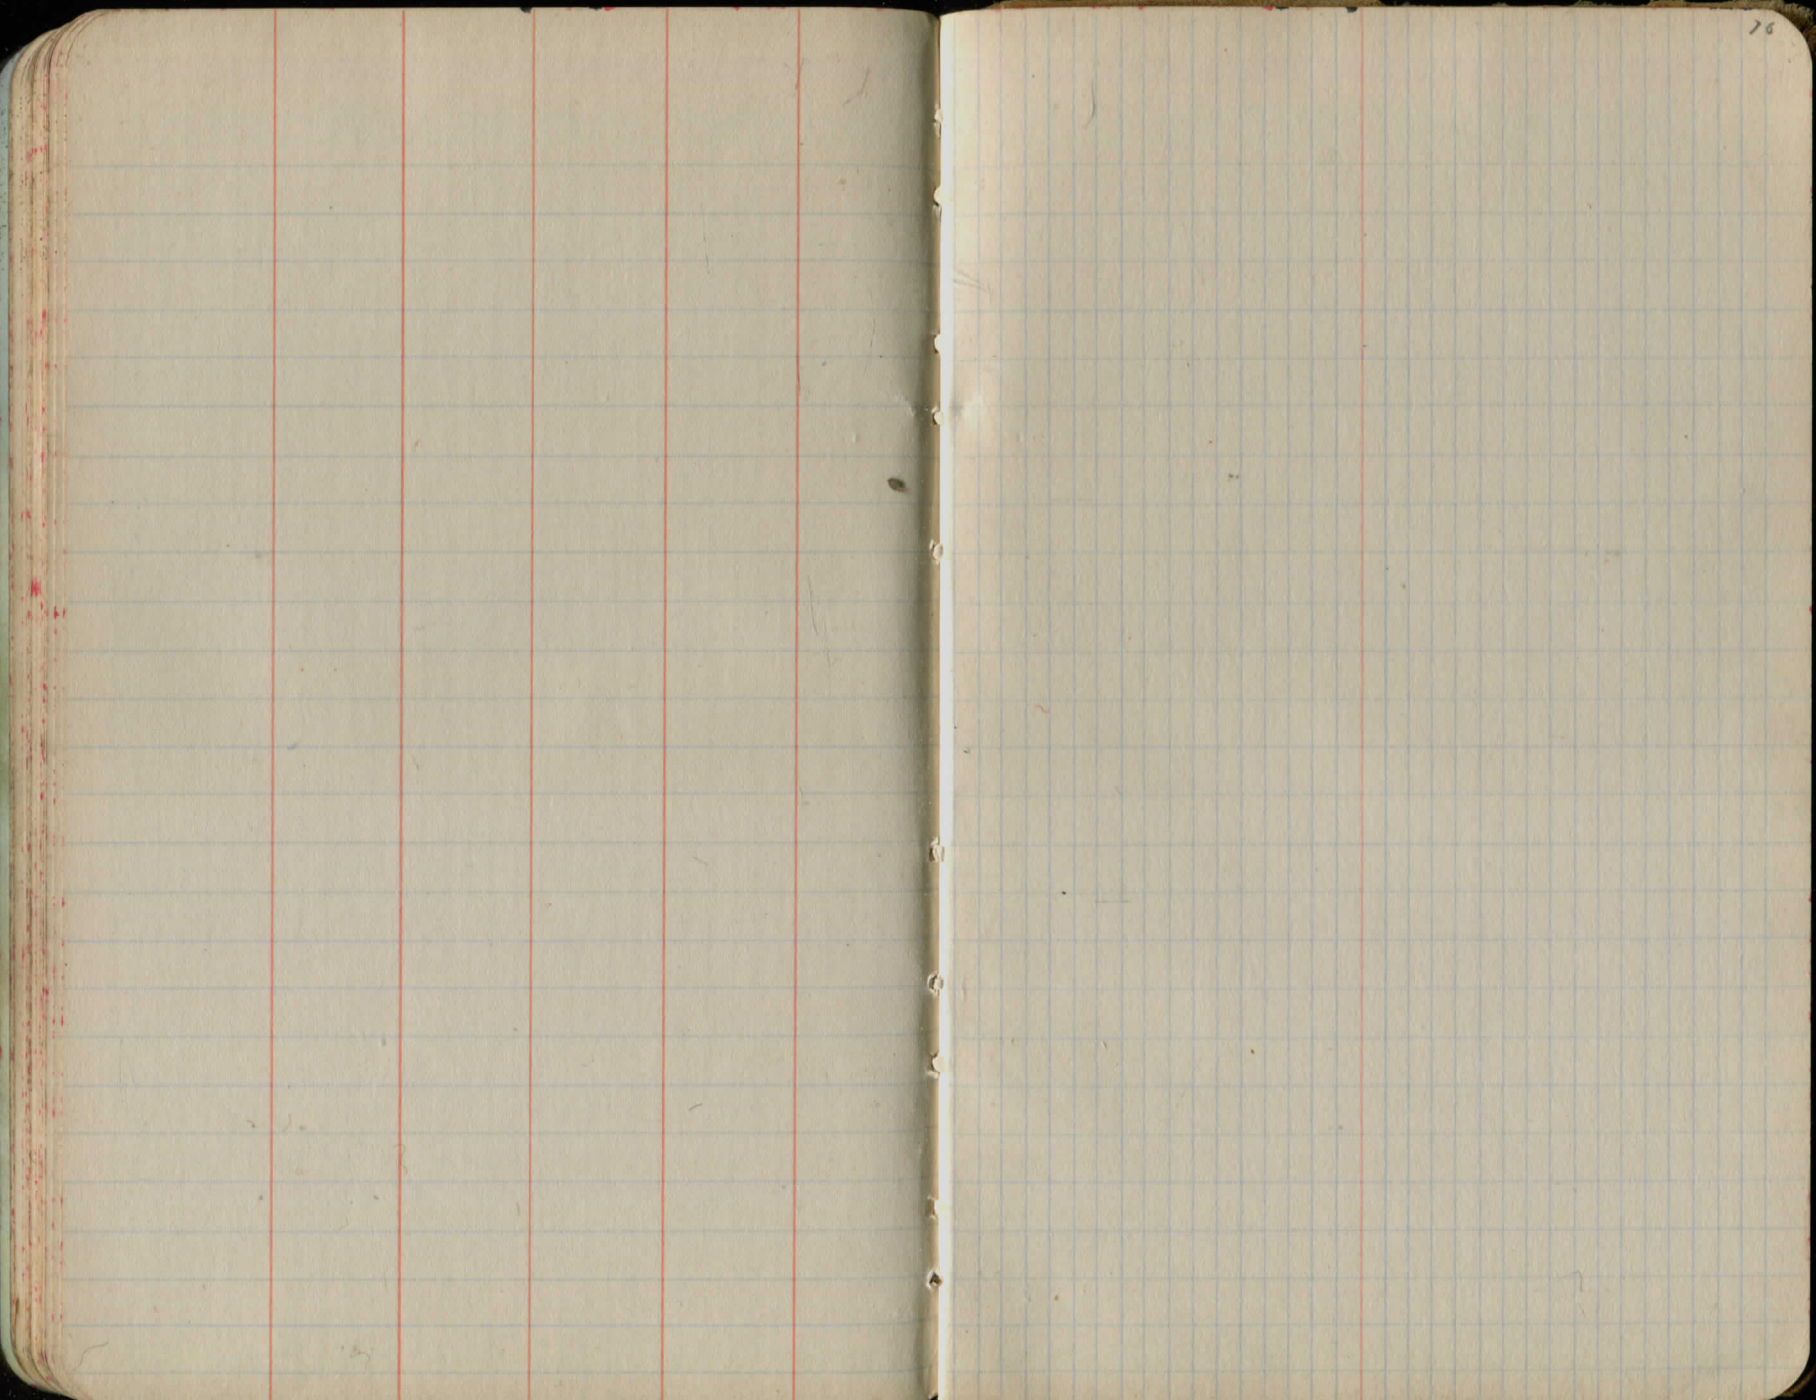


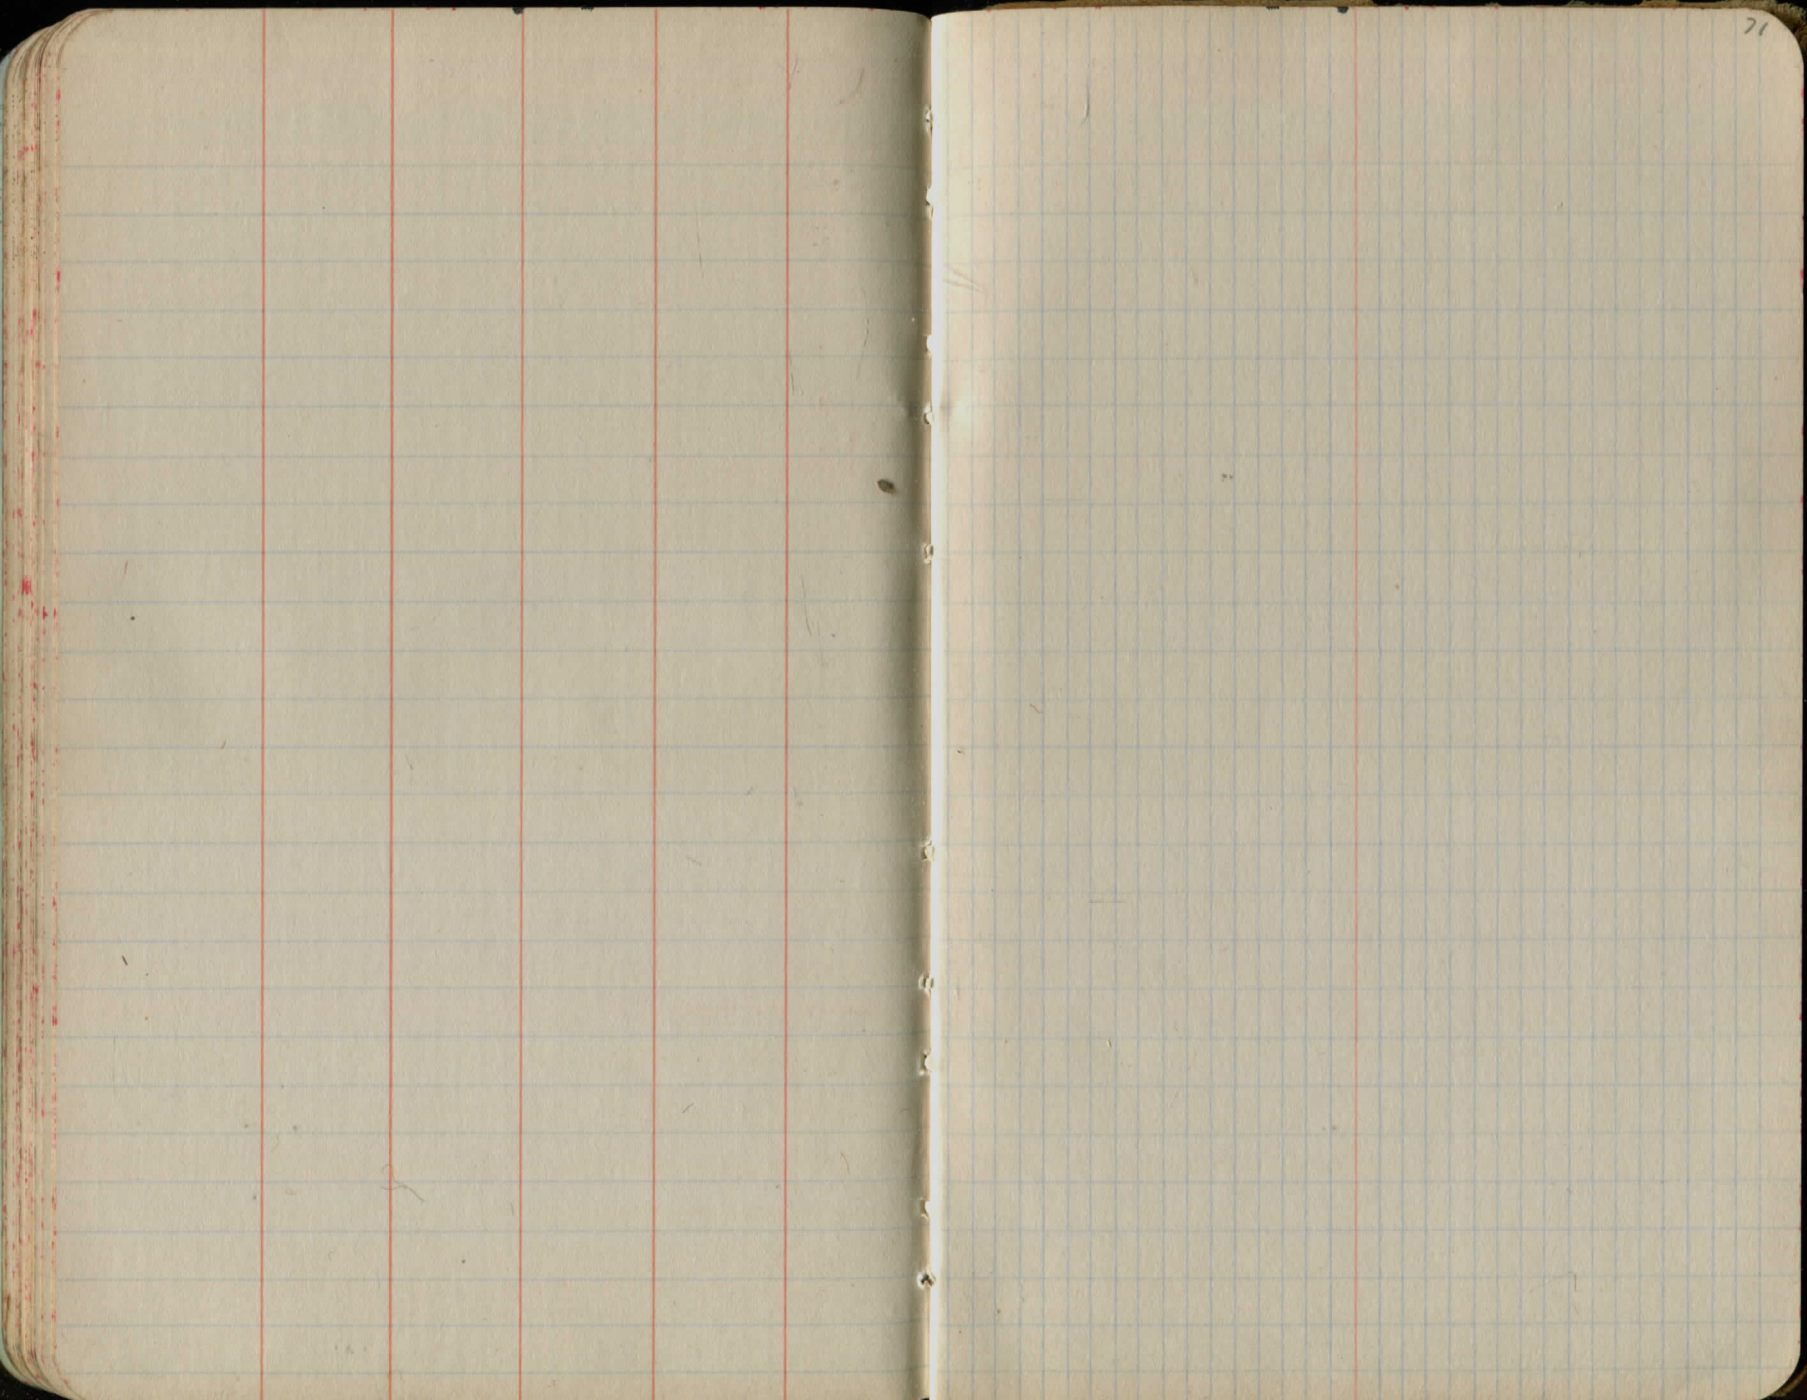


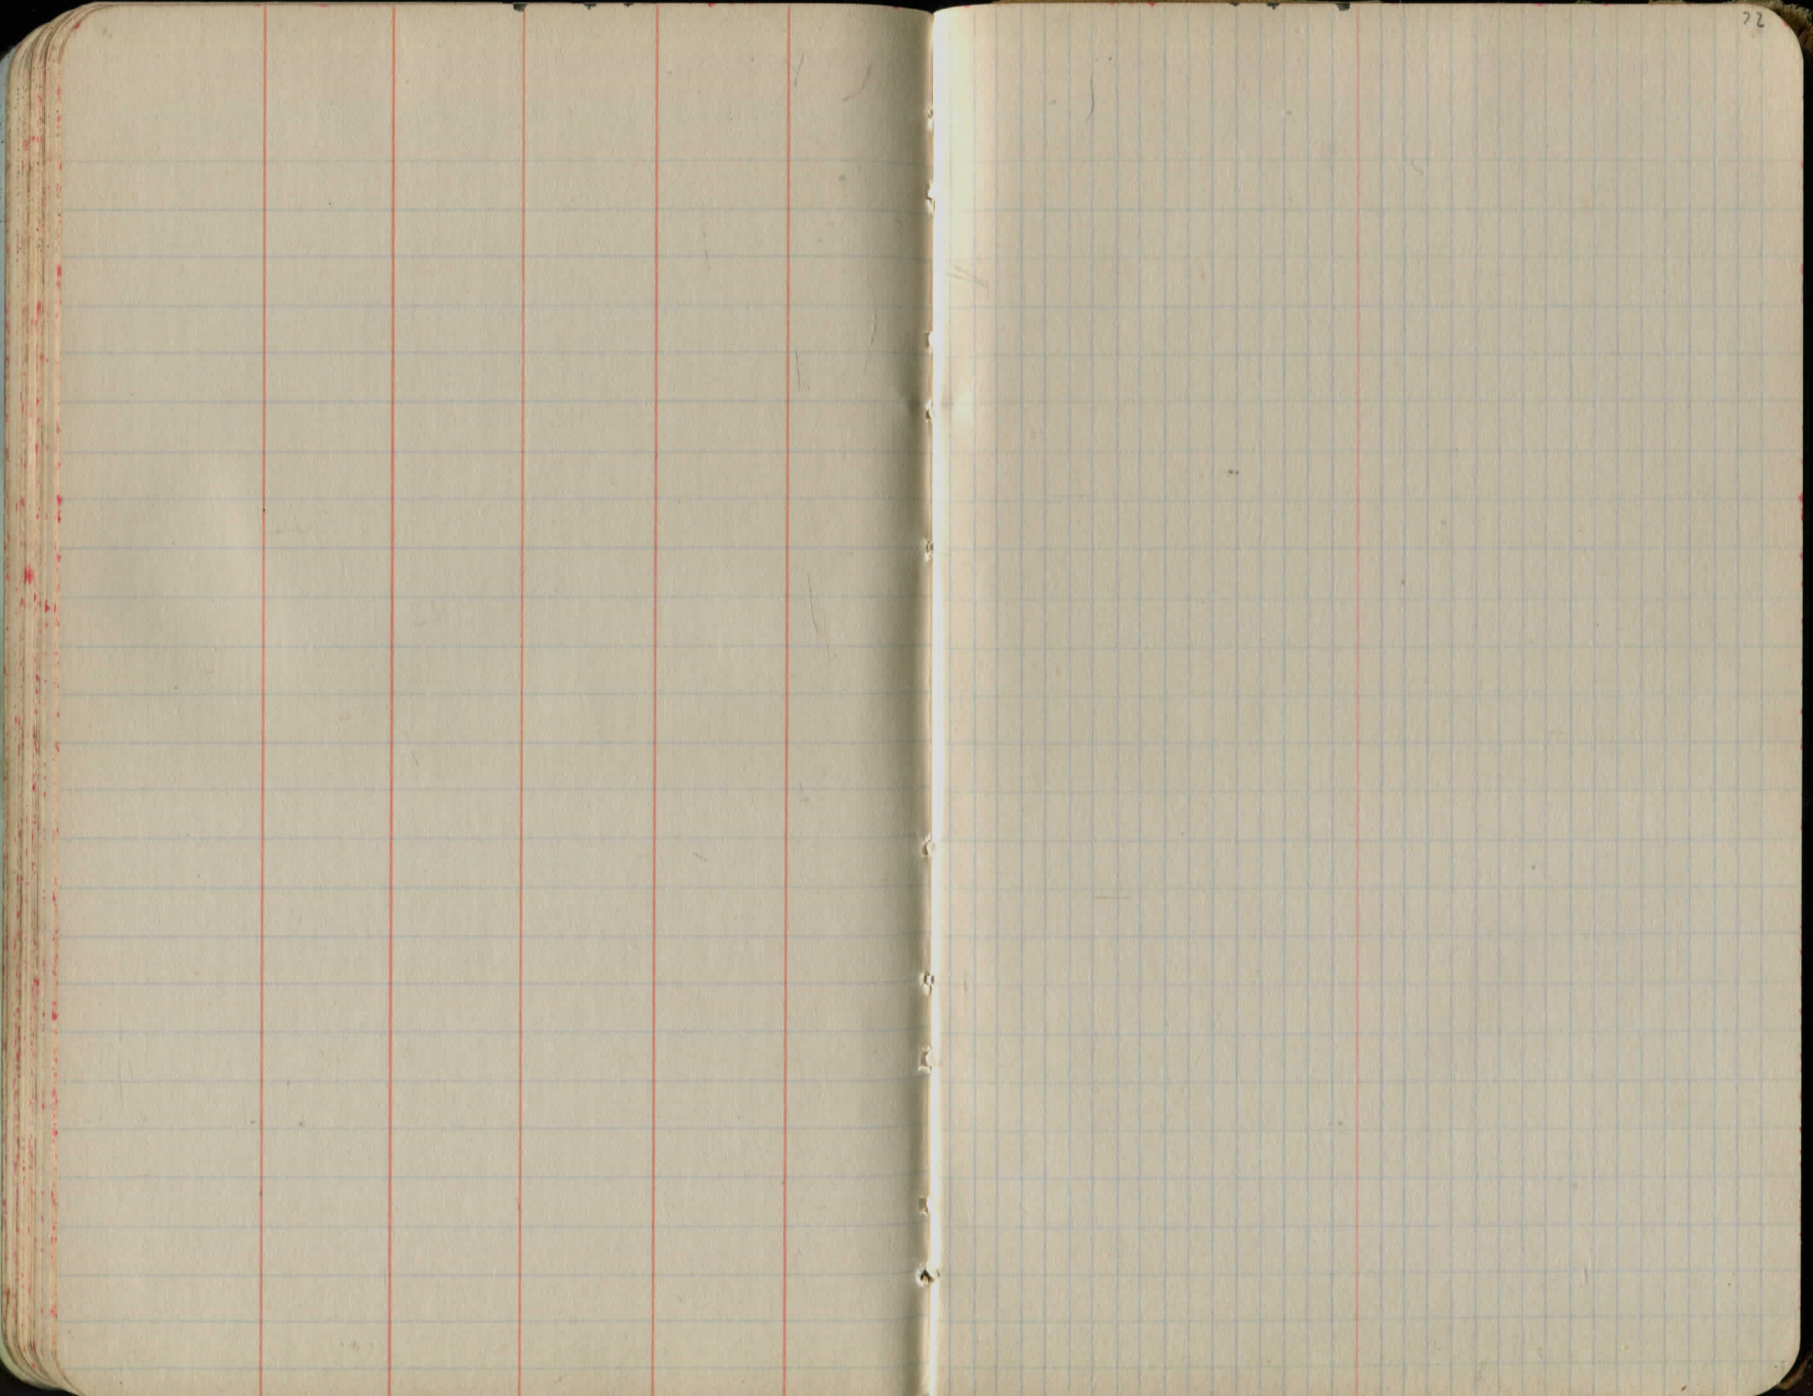


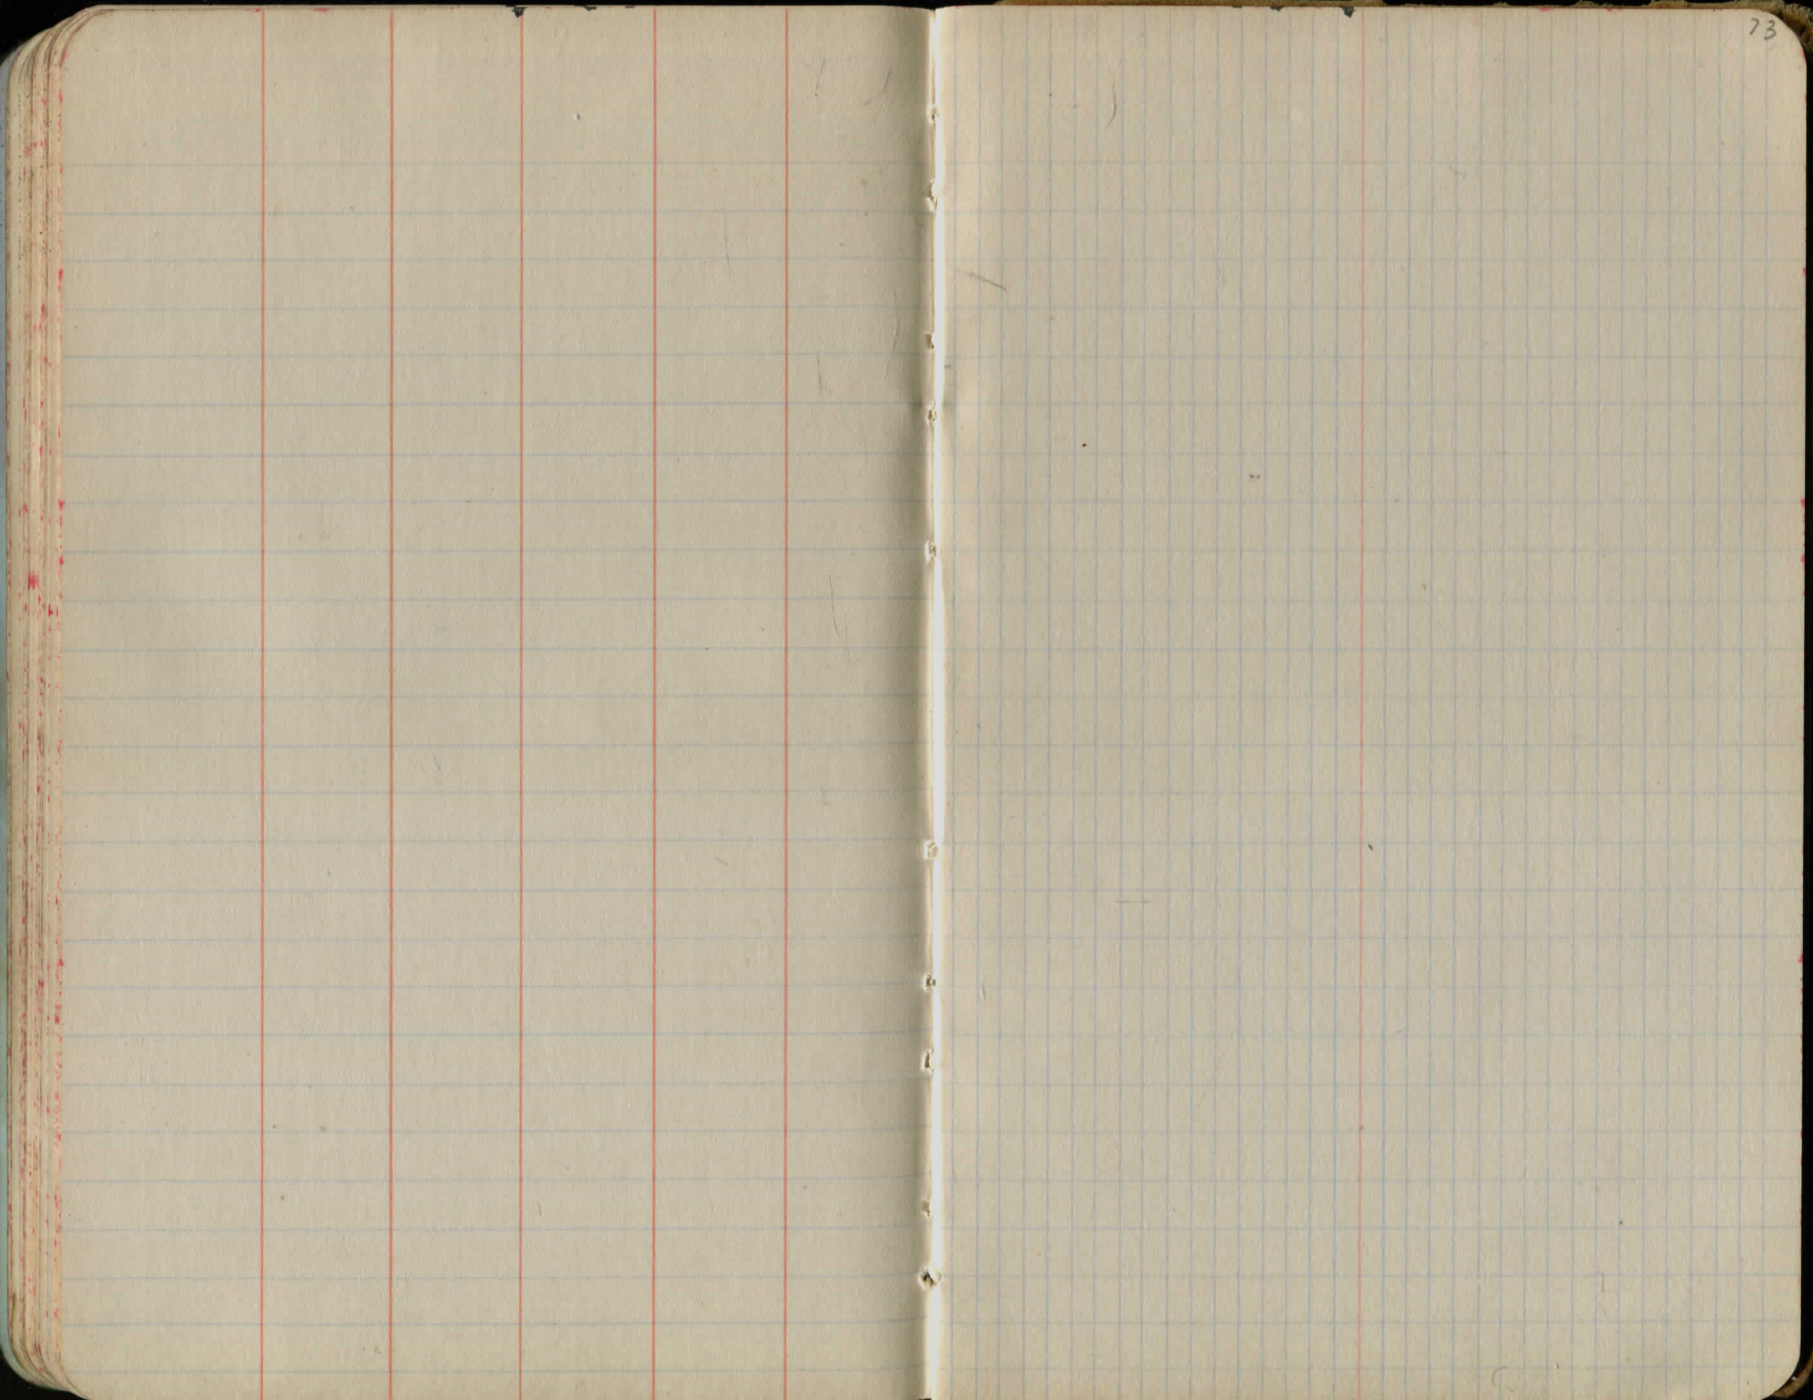


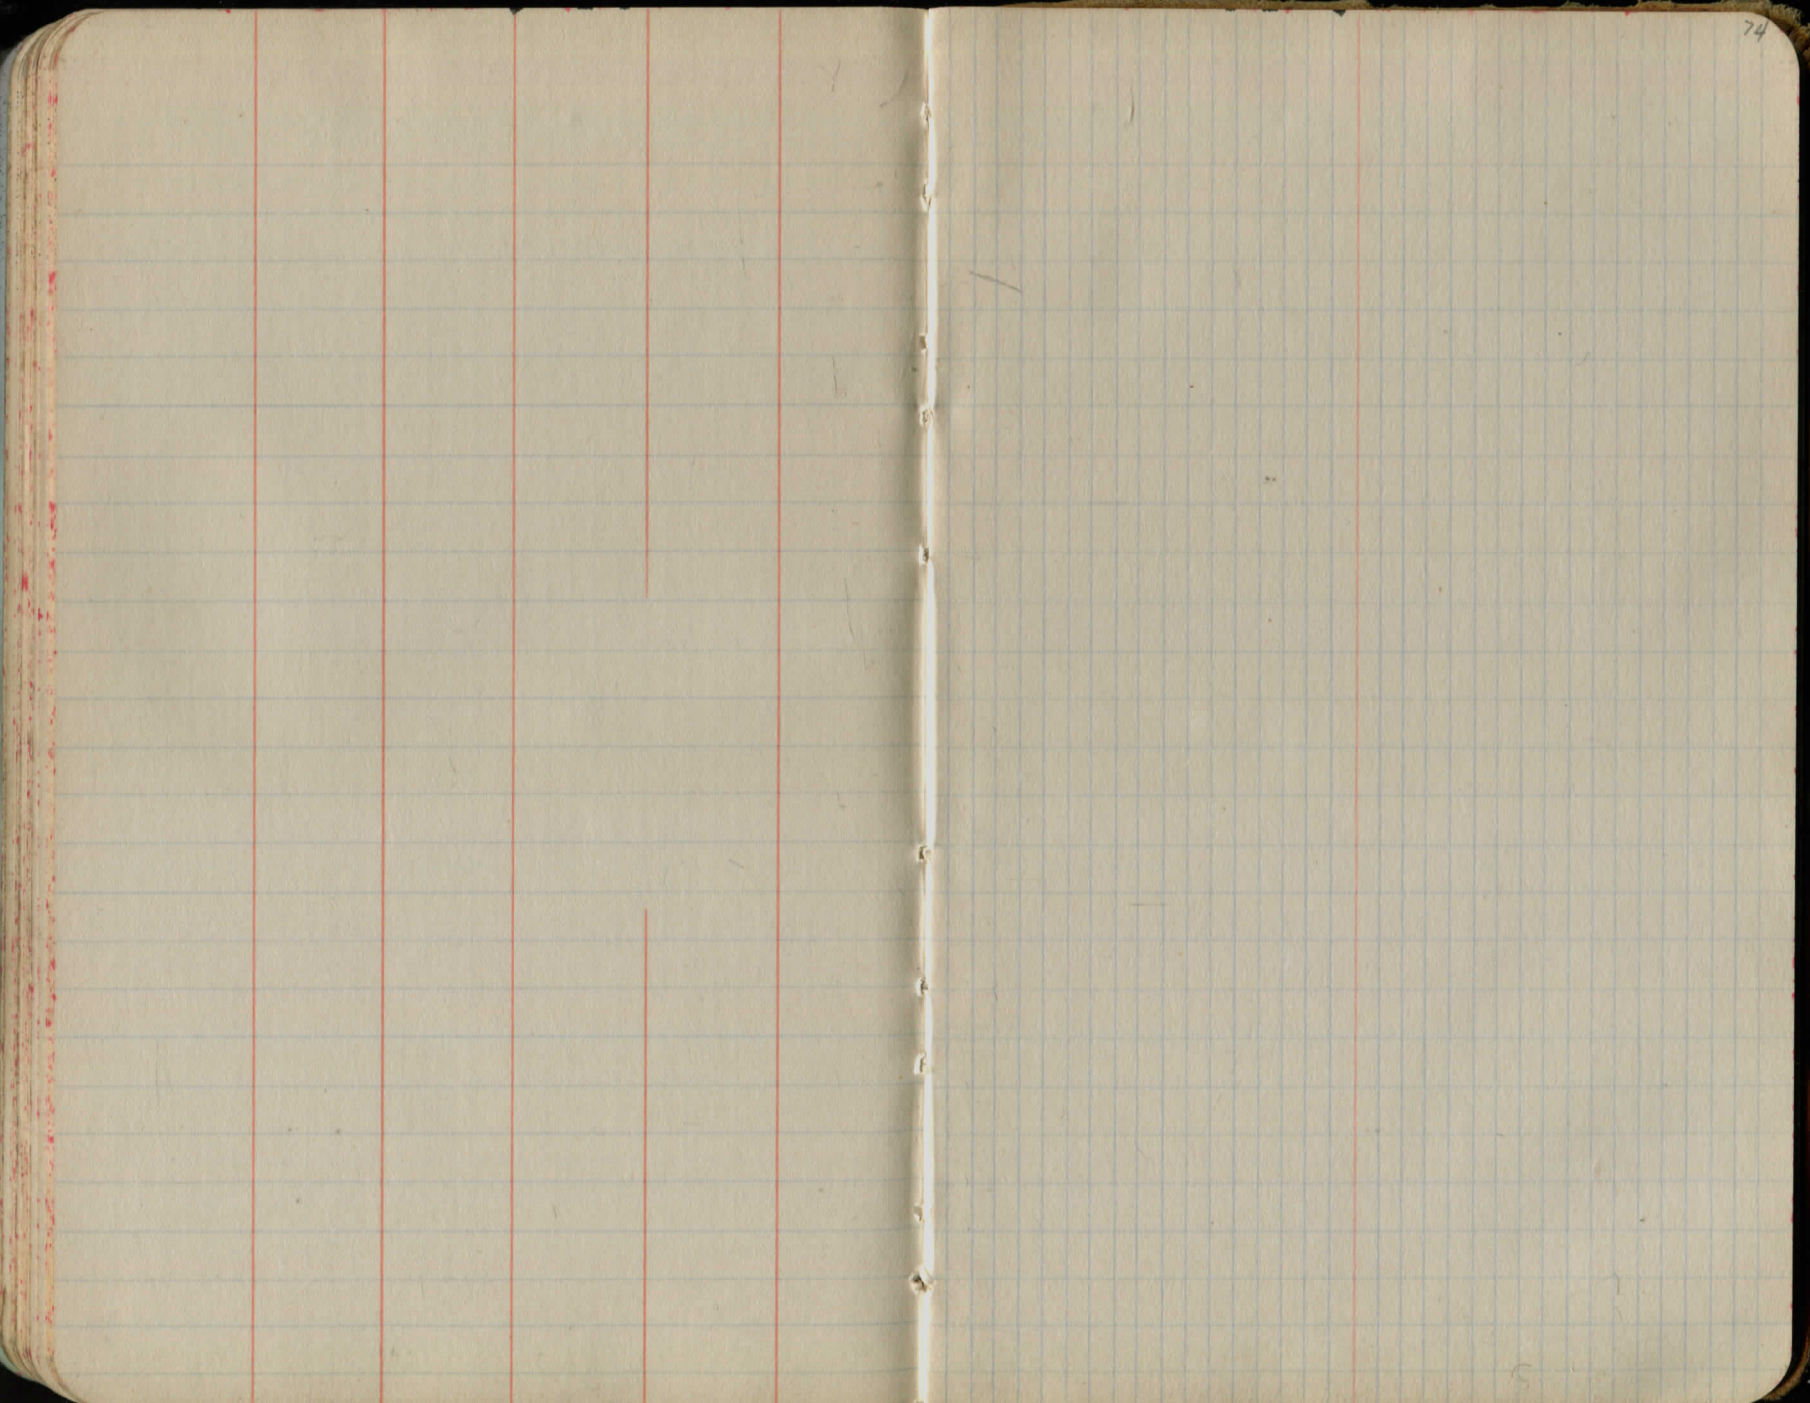


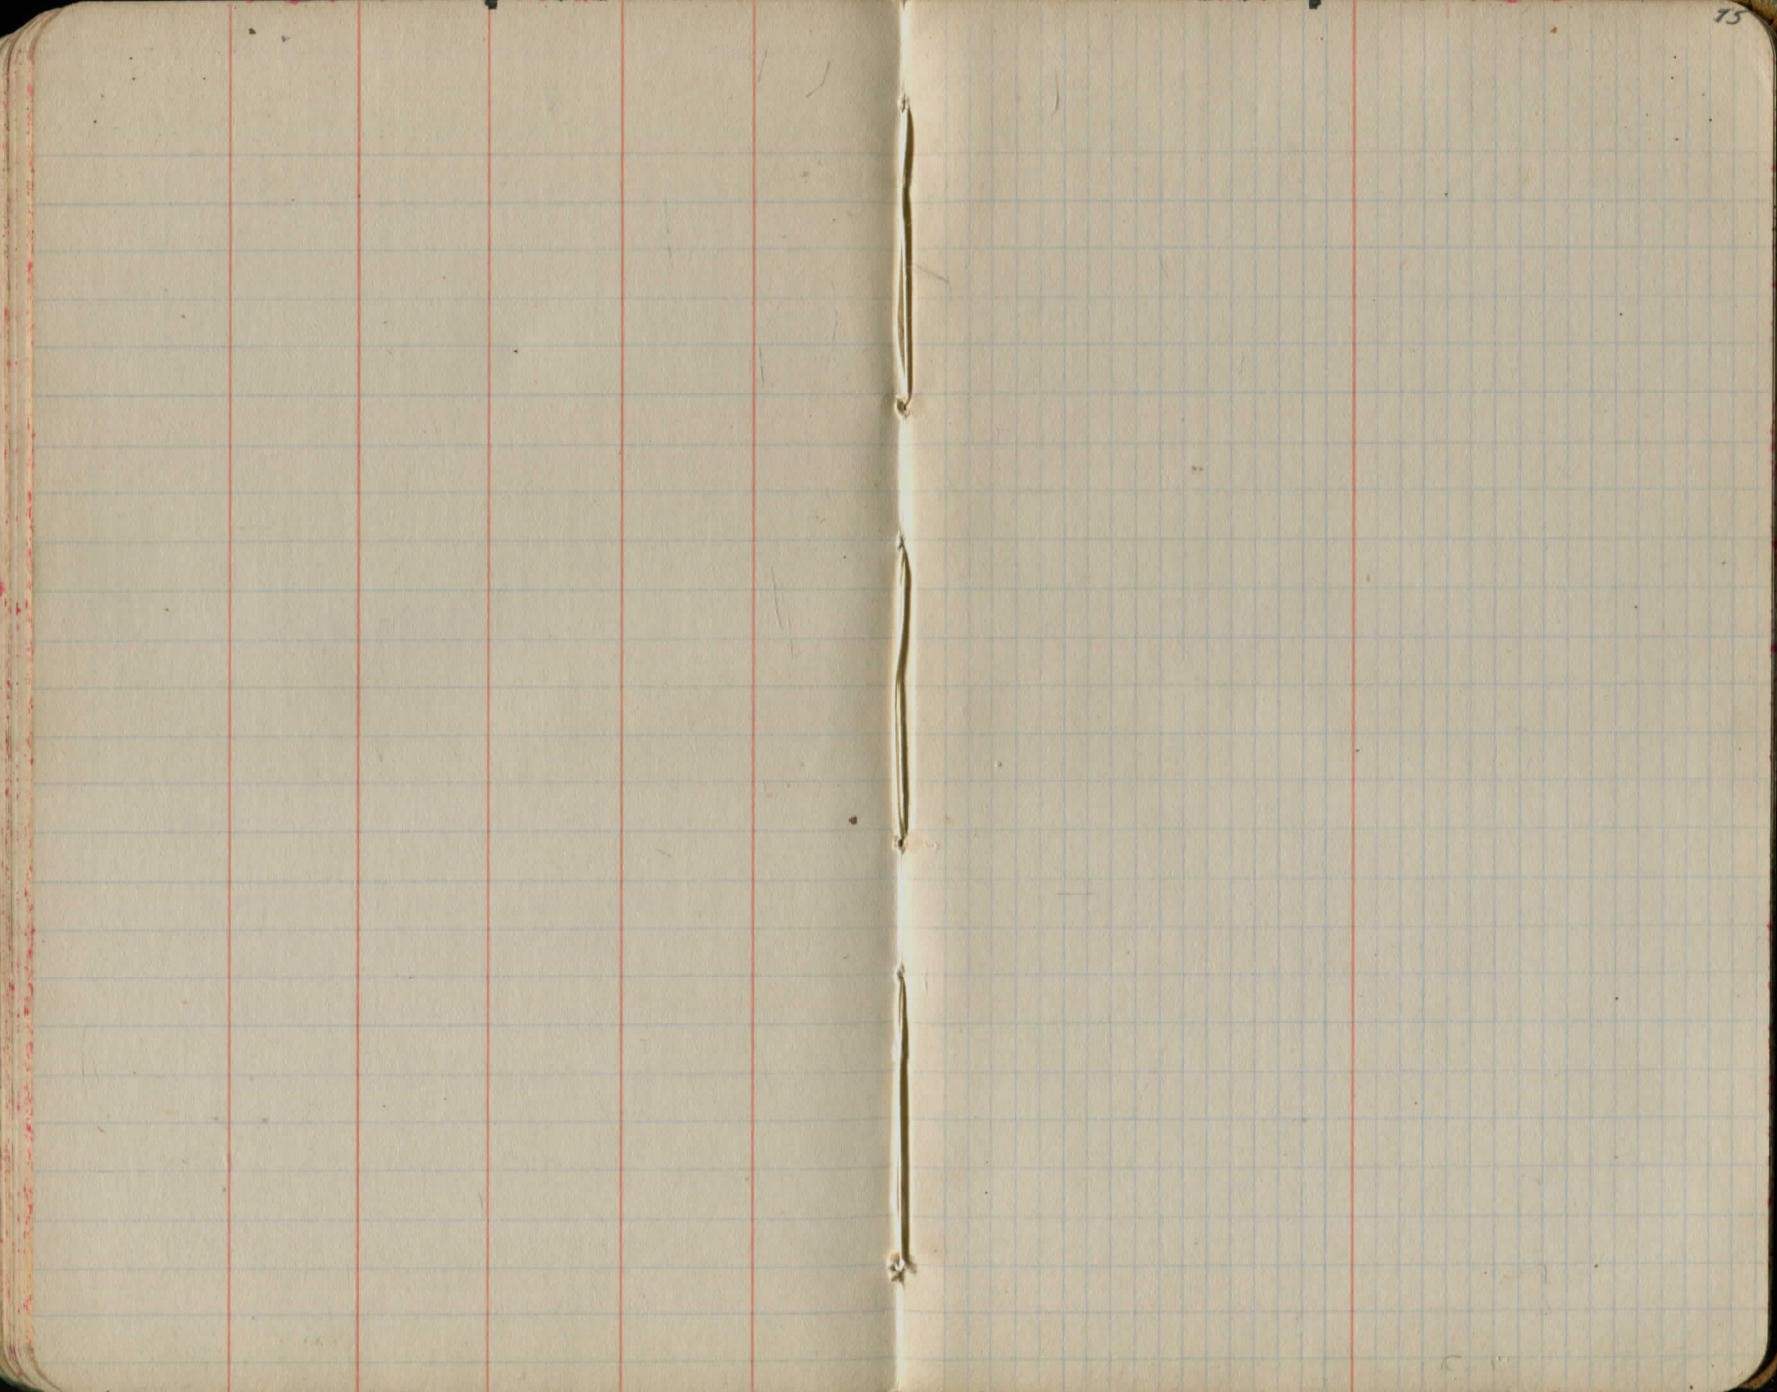


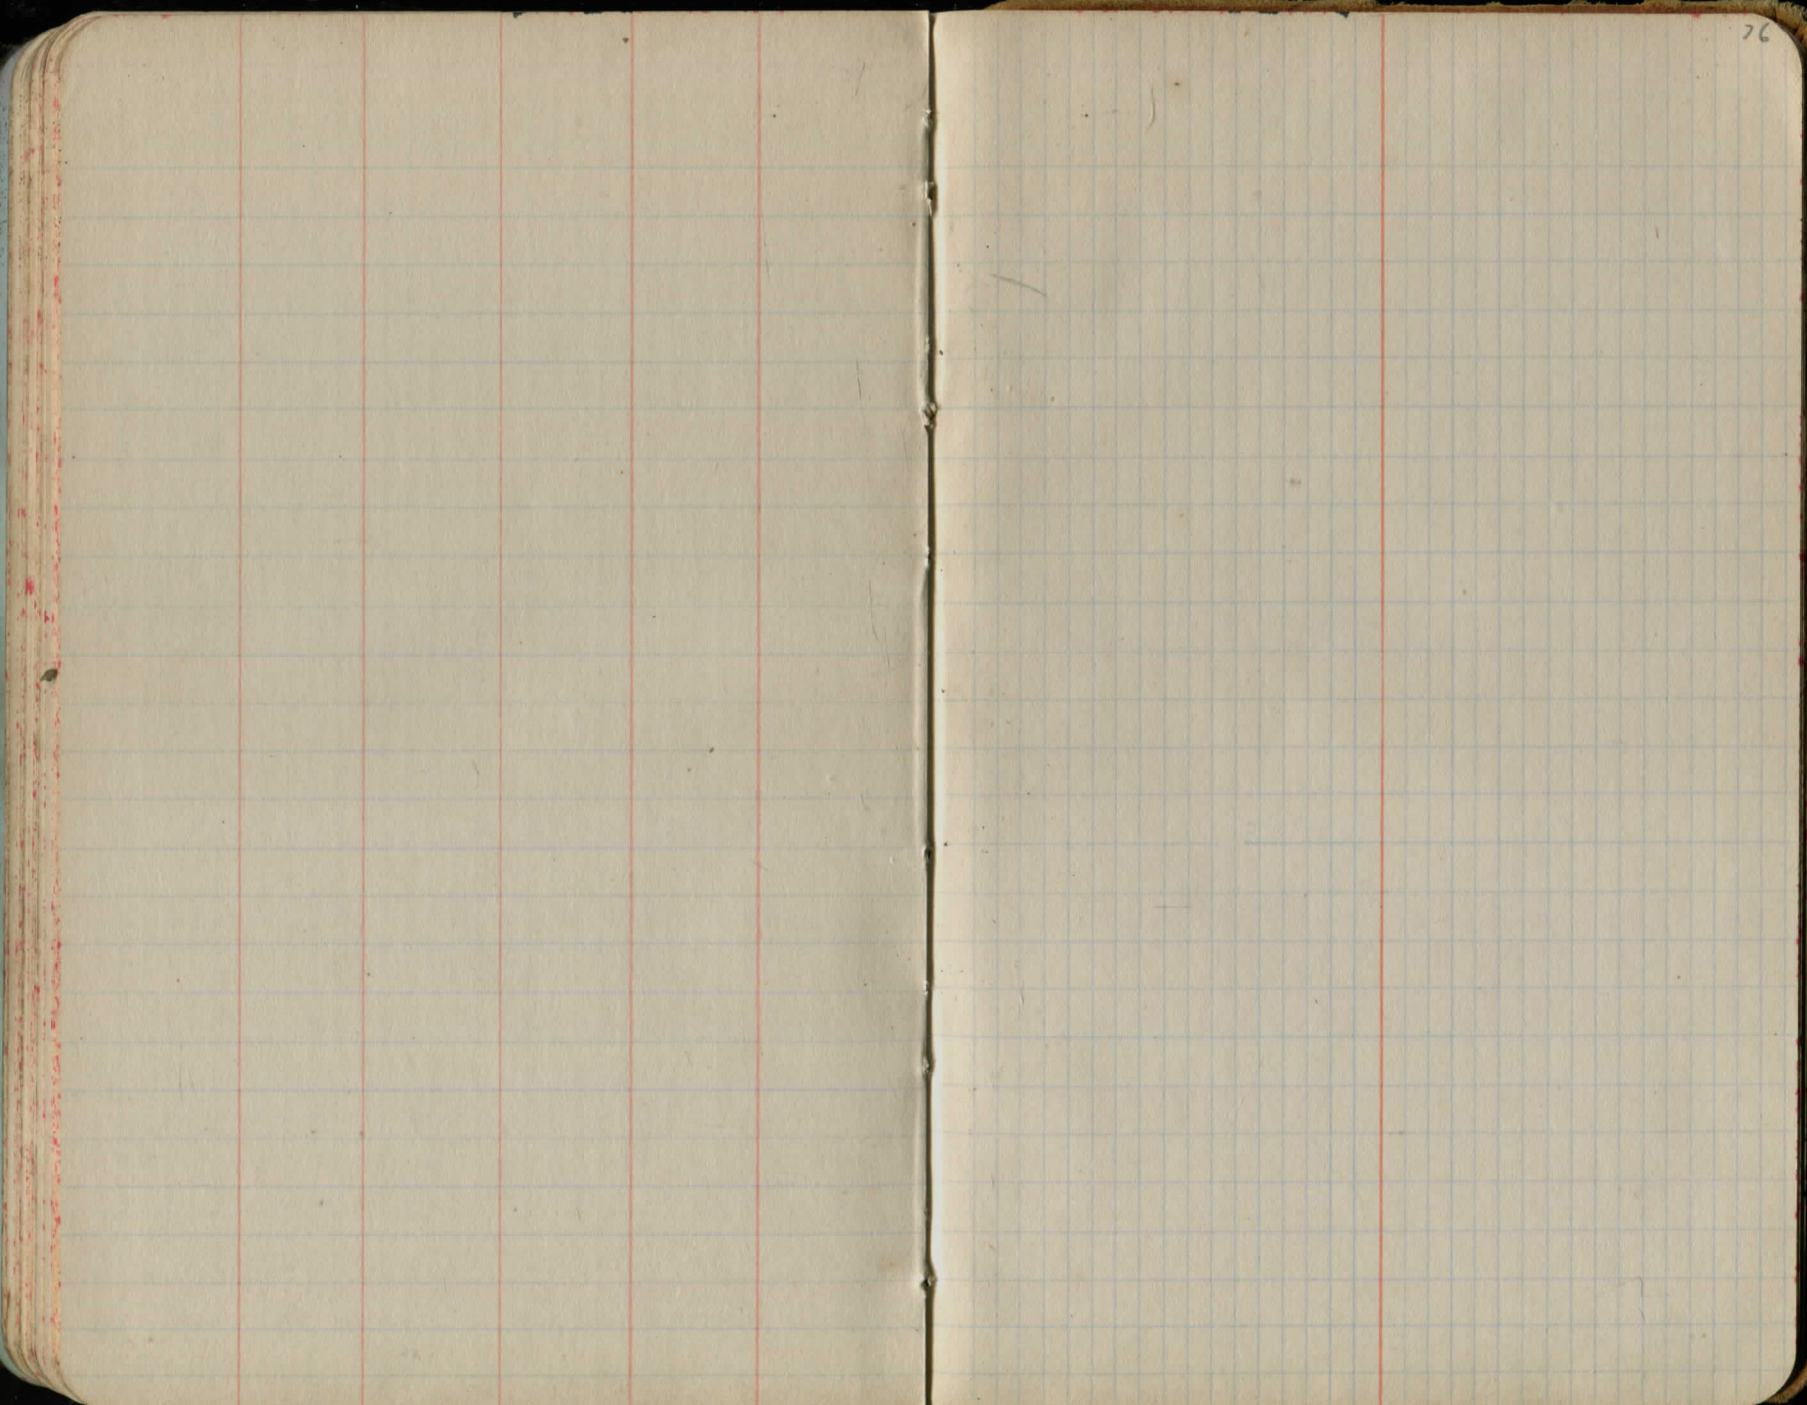

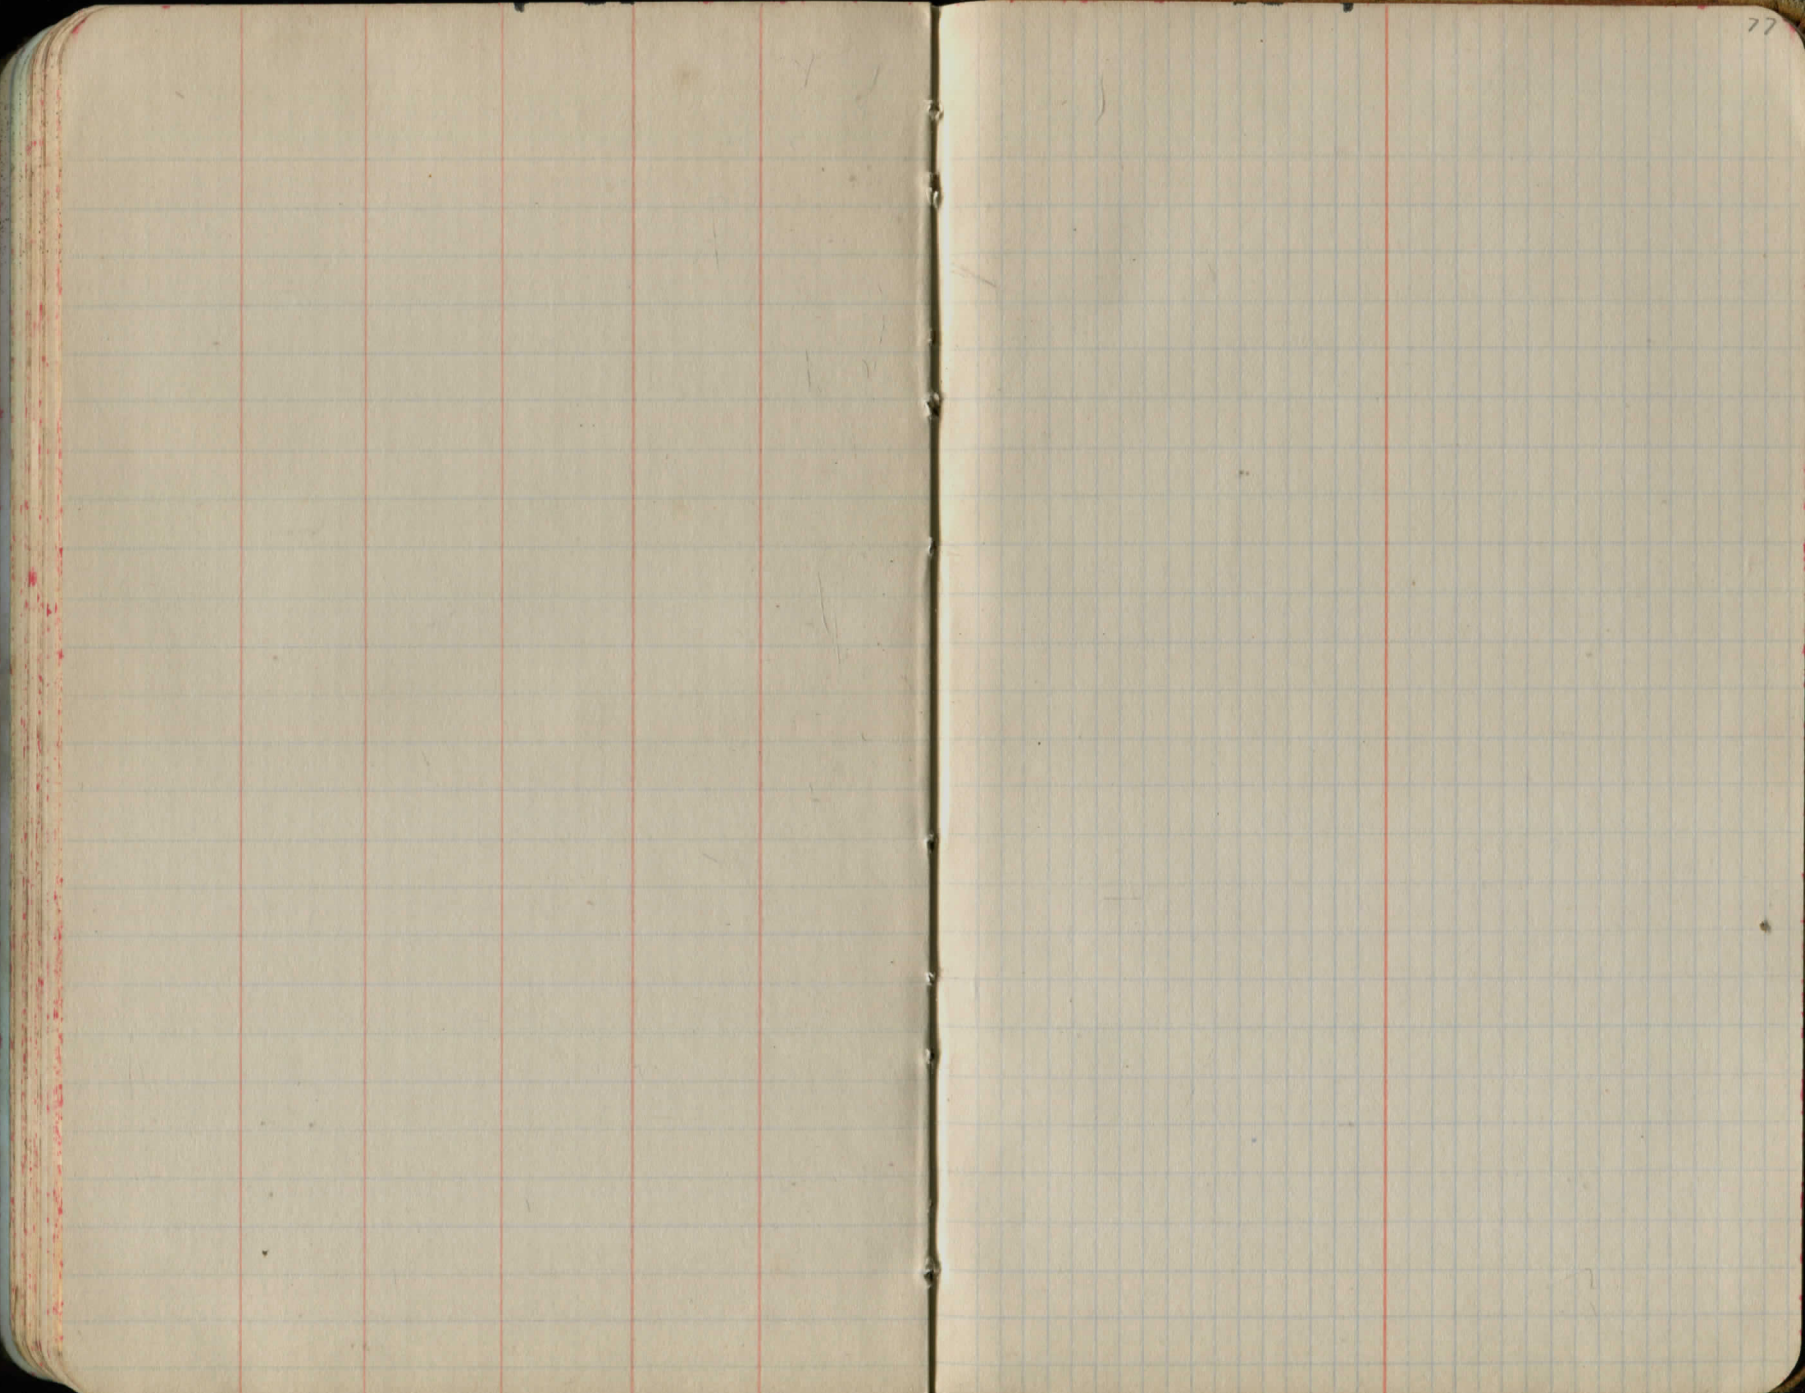

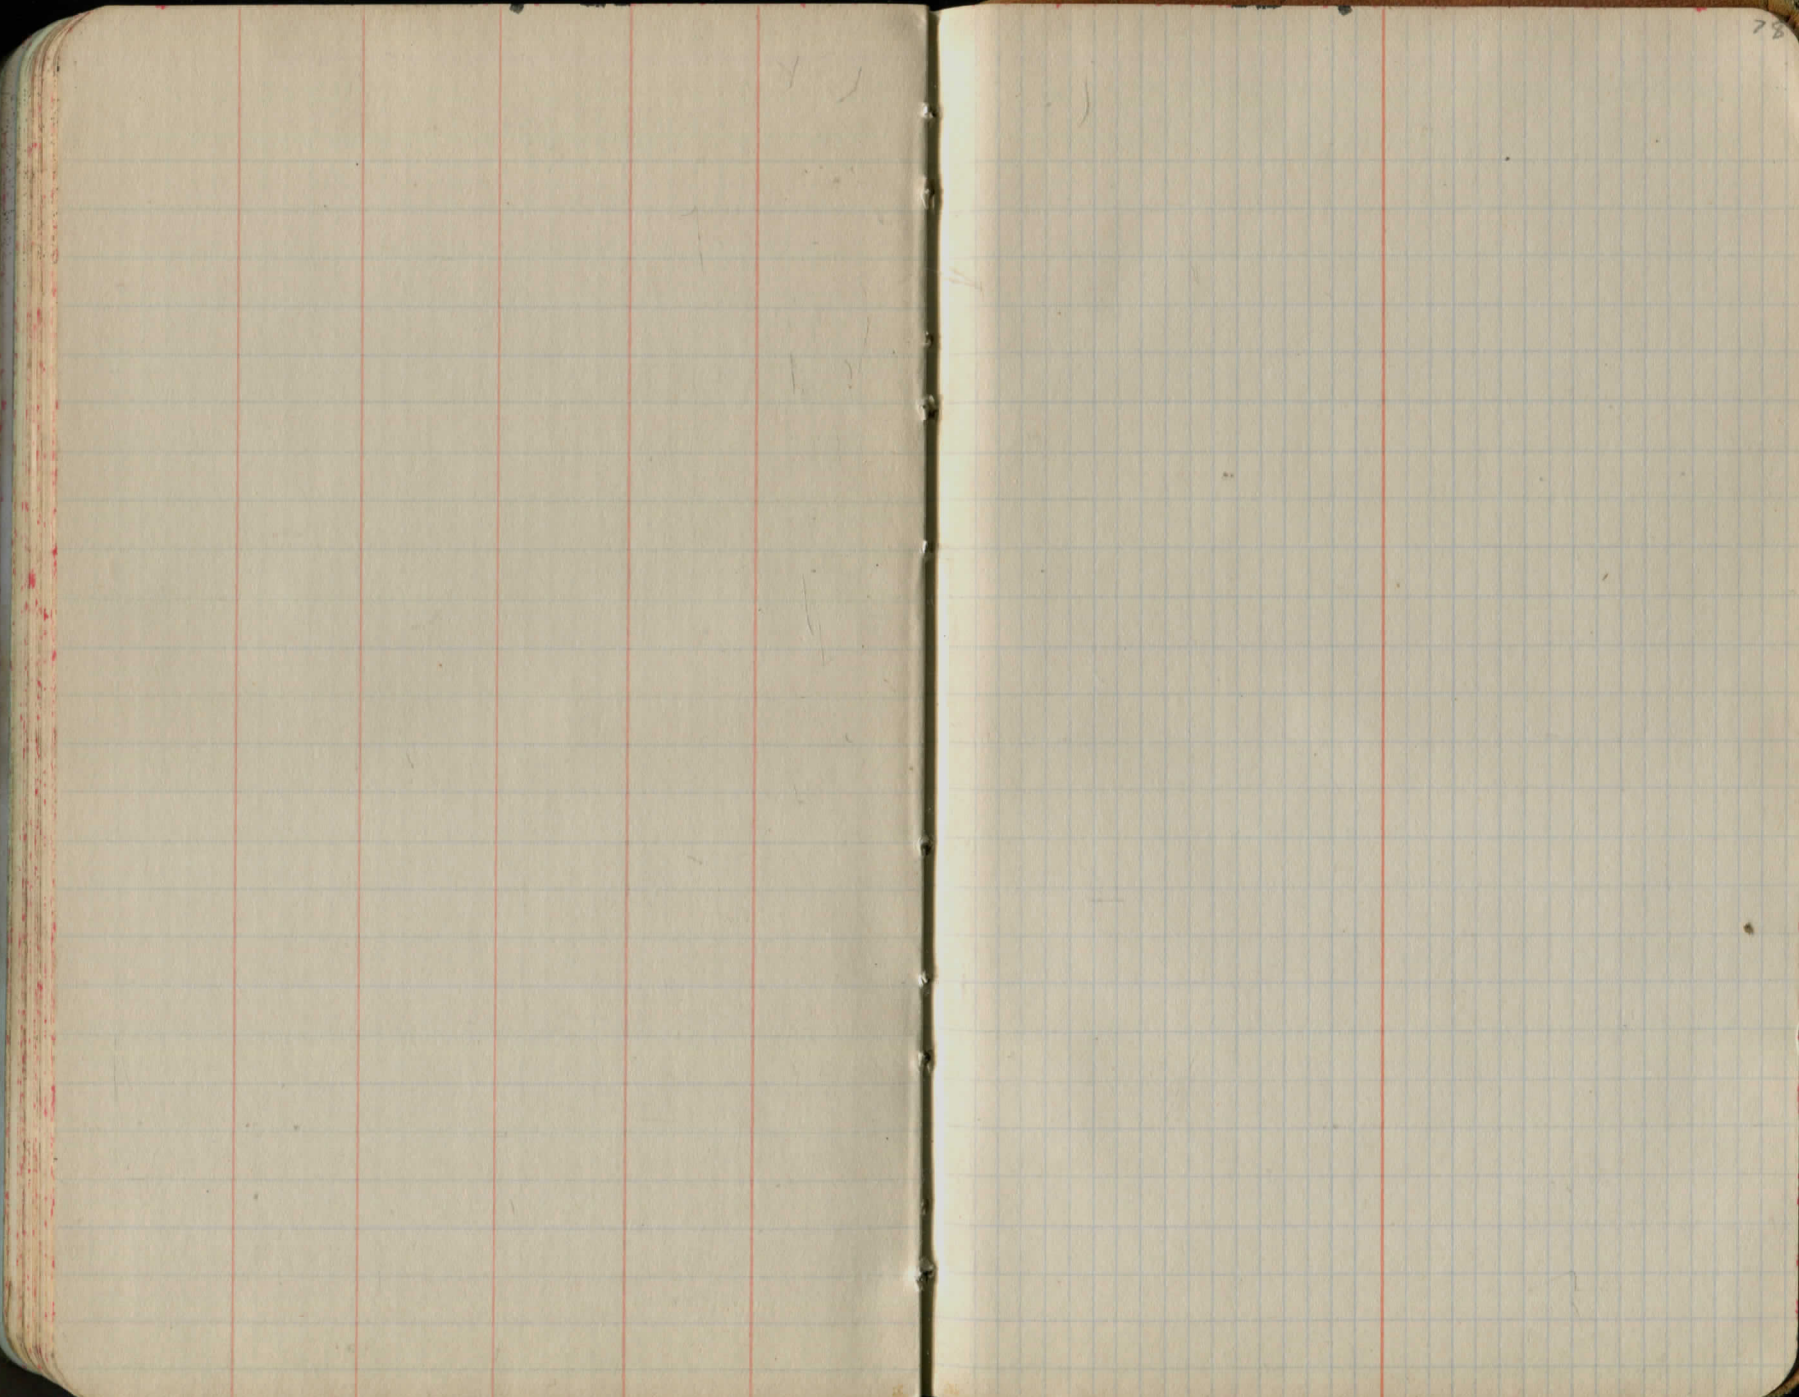

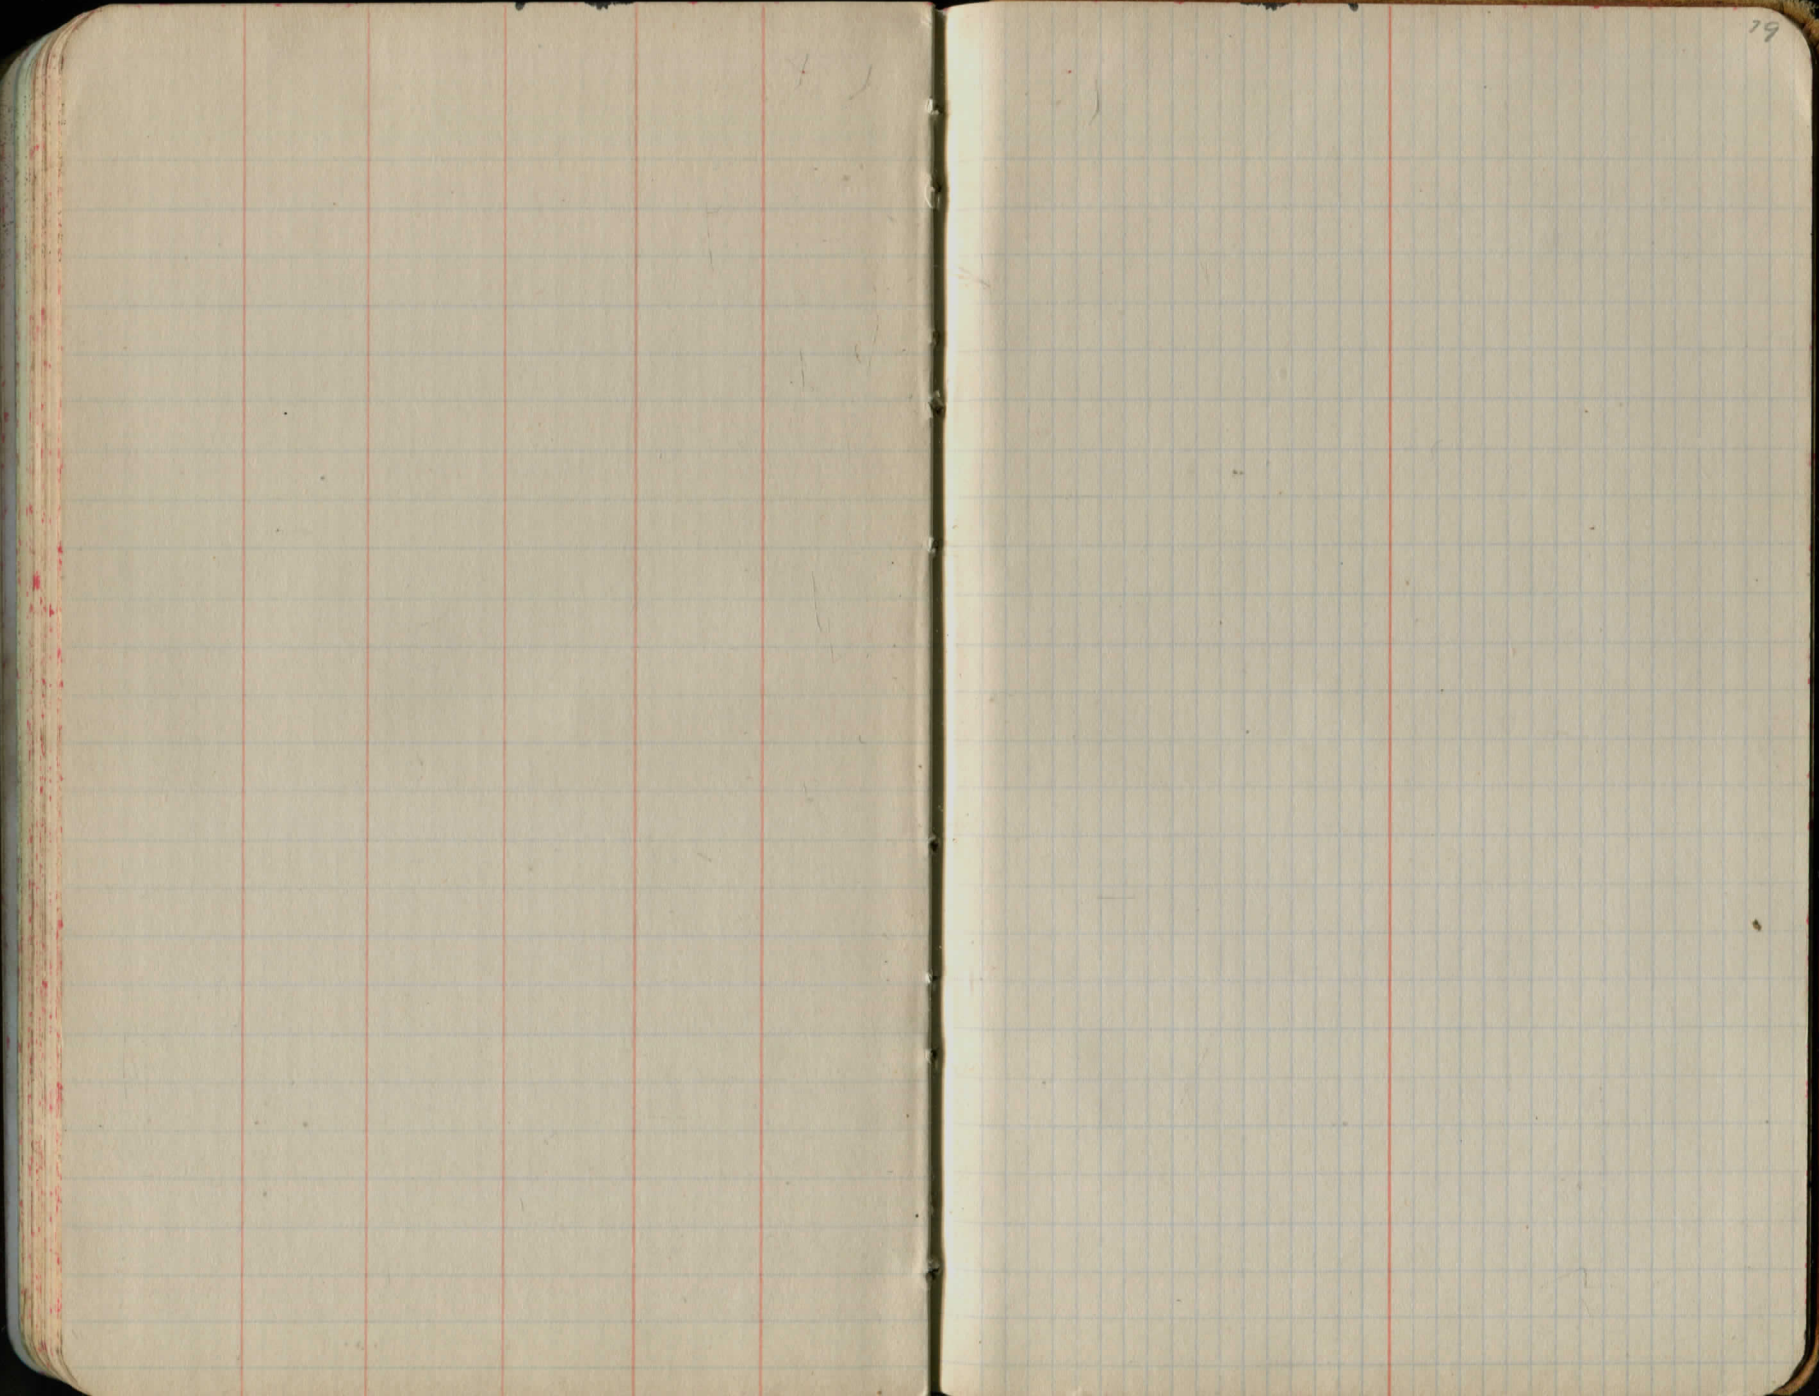

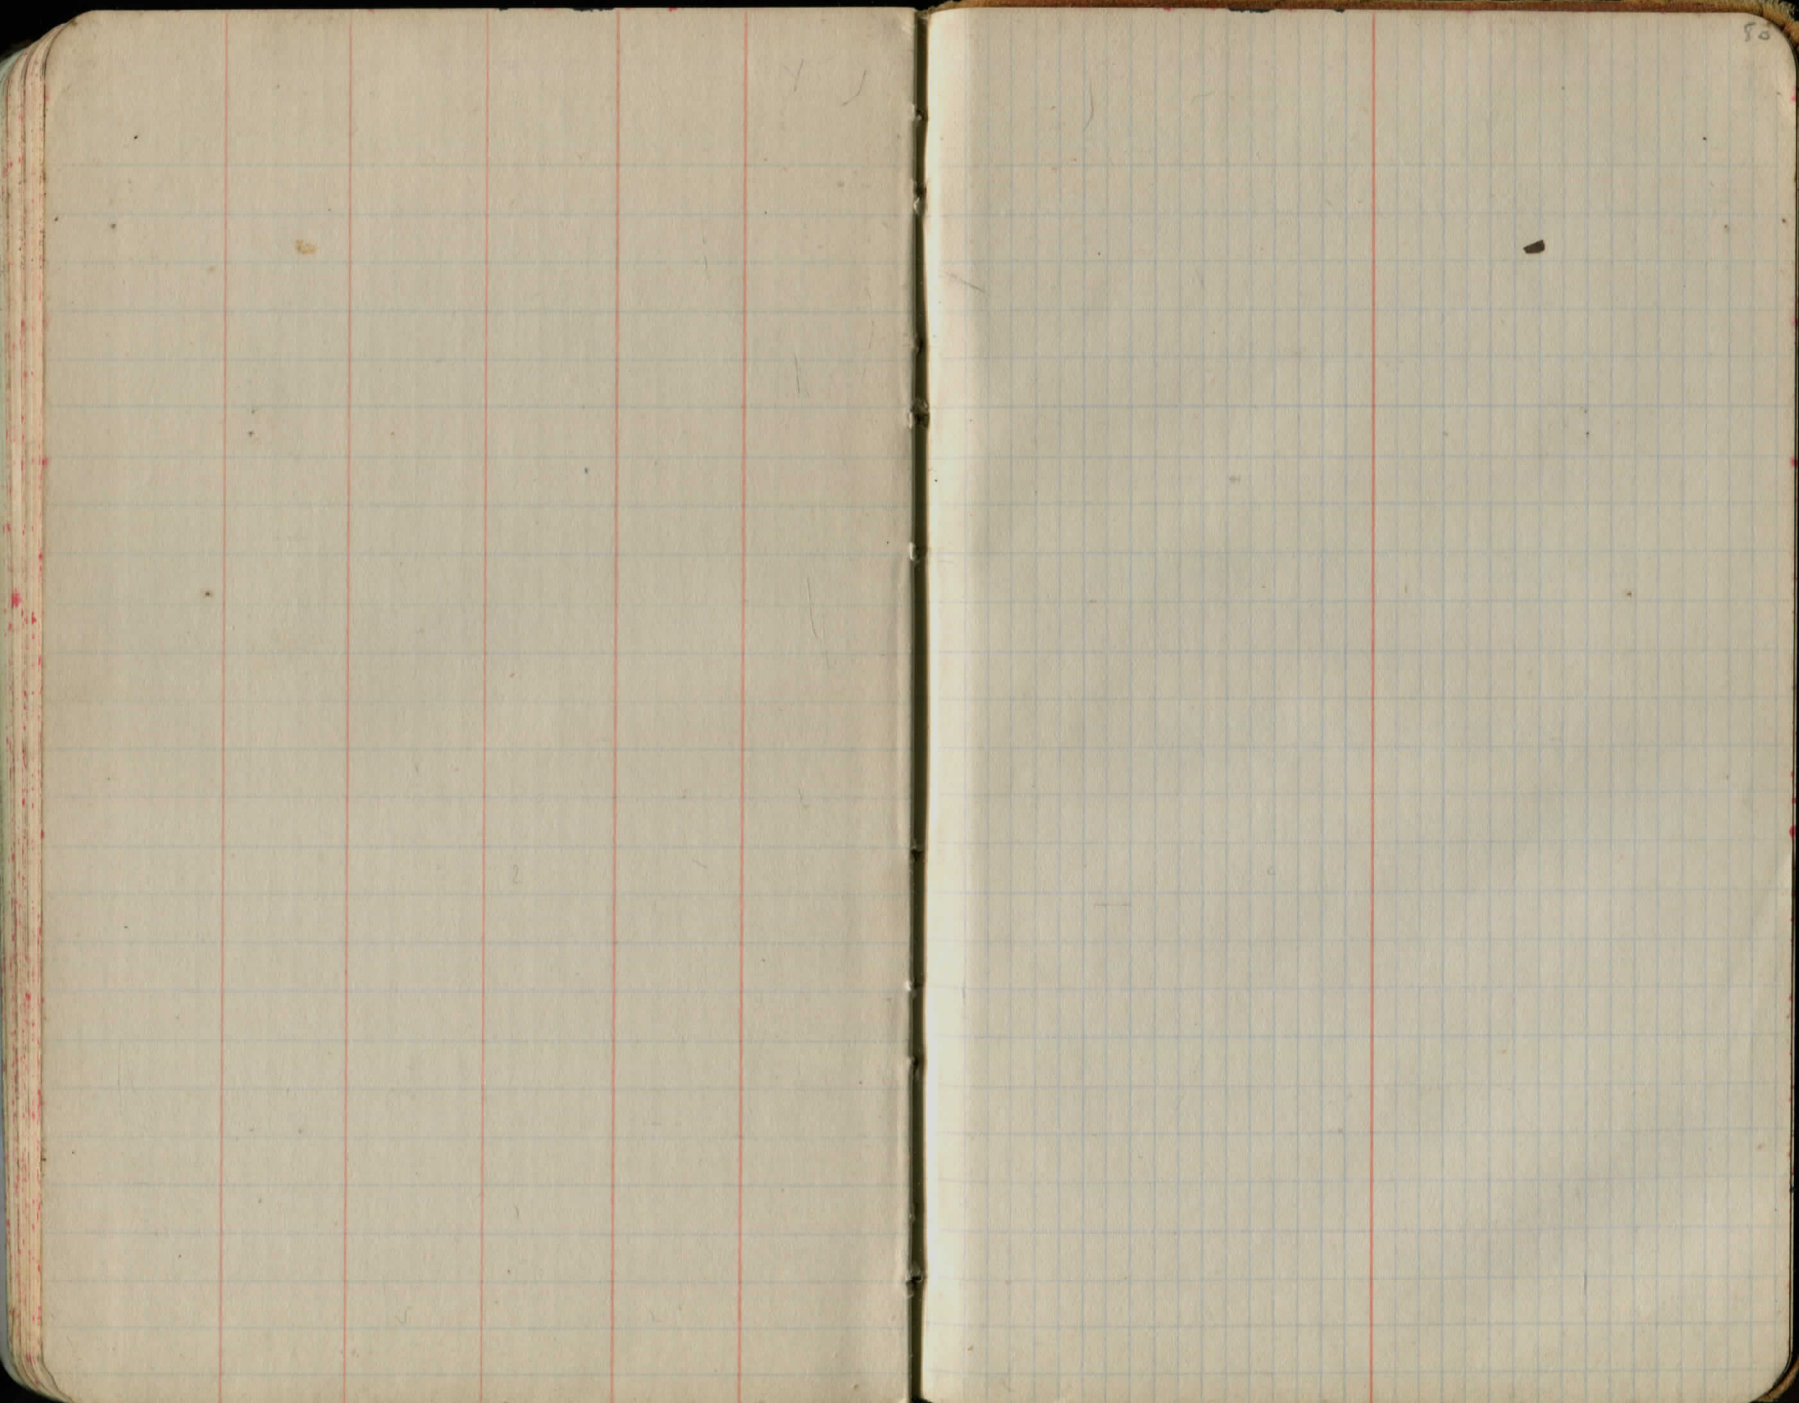

Statute width of State
Road in 1827 was 60'.

DIRECTIONS FOR USE OF TABLES

TABLE No. 1.

Distance of slope stake from side or shoulder
take for any width roadway, slope 1 1/2 to 1.
If ground is nearly level, the cut or fill at side
stake is located by the double entry method in

left column and top row. The number in both

of table in same row and column gives

level estimate the difference in elevation between

the side stake and a lower stake by this

amount if cut across a hill. Add this amount

to cut

rod at

target. It does not make the right adjustment

necessary.

TABLE No. 2.

To find Tangent and External for curve of

any other degree, divide by degree of curve and

add constant found in column of constants.

Degree of curve with a given L may be found

by dividing tangent (or external), opposite L by

given tangent (or external).

The distance from a point on the tangent to

the curve is very nearly the square of the tangent

length divided by two the tangent

DIRECTIONS FOR USE OF TABLES

TABLE No. 1.

Distance of slope stake from side or shoulder stake for any width roadway, slope $1\frac{1}{2}$ to 1. If ground is nearly level, the cut or fill at side stake is located by the double entry method in left column and top row. The number in body of table in same row and column gives distance from side stake to slope stake. If ground is not level estimate the difference in elevation between the side stake and slope stake, lower target by this amount if cut, elevate if fill. Add this amount to cut or fill and find distance in table. Set up rod at this point, and line of sight should cut target. If it does not make the slight adjustment necessary.

TABLE No. 9.

To find Tangent and External for curve of any other degree, divide by degree of curve and add correction found in column of corrections.

Degree of curve with a given I may be found by dividing tangent, (or external), opposite I by given tangent, (or external).

The distance from a point on the tangent to the curve is very nearly the square of the tangent length divided by twice the radius.




TABLE II
TRIGONOMETRIC FORMULÆ.

$$\angle A = \angle MOP \quad \angle B = \angle PON = \angle OPL$$

$$R = OB = c = 1$$

$$\sin A = \frac{a}{c} = \frac{a}{1} = a = \cos B = LP$$

$$\cos A = \frac{b}{c} = \frac{b}{1} = b = \sin B = OL$$

$$\tan A = \frac{a}{b} = \frac{MQ}{OM} = \frac{MQ}{1} = MQ = \cot B = MQ$$

$$\cot A = \frac{NT}{ON} = \frac{NT}{1} = NT = \tan B = NT$$

$$\sec A = \frac{OQ}{OM} = \frac{OQ}{1} = OQ = \csc B = OQ$$

$$\csc A = \frac{OT}{ON} = \frac{OT}{1} = OT = \sec B = OT$$

$$\text{vers } A = \frac{LM}{OP} = LM = \text{covers } B \#$$

$$\text{covers } A = \frac{OP - LP}{OP} = OP - LP = \text{vers } B$$

$$\text{exsec } A = PQ = \text{coexsec } B$$

$$\text{coexsec } A = PT = \text{exsec } B$$

$$\sin \frac{1}{2} A = \sqrt{\frac{1 - \cos A}{2}} \quad \cos \frac{1}{2} A = \sqrt{\frac{1 + \cos A}{2}}$$

$$\sin 2A = 2 \sin A \cos A \quad \cos 2A = \cos^2 A - \sin^2 A$$

$$\text{Law of Lines} \quad \frac{\sin A}{a} = \frac{\sin B}{B} = \frac{\sin C}{C}$$

$$\text{Law of Cosines} \quad c^2 = a^2 + b^2 - 2ab \cos C$$

$$\text{Law of Tangents} \quad \frac{a+b}{a-b} = \frac{\tan \frac{1}{2}(A+B)}{\tan \frac{1}{2}(A-B)}$$

TABLE II—Continued
TRIGONOMETRIC FORMULAE (continued)

In any triangle:

Given a, b, C; to find c, B, A.

Use Law of Lines.

Given A, B, c; to find a, b, C.

Use Law of Lines.

Given a, b, c; to find A, B, C.

$$\text{Let } \frac{a+b+c}{2} = s, \sqrt{\frac{(s-a)(s-b)(s-c)}{s}} = r$$

$$\cos \frac{1}{2} A = \sqrt{\frac{s(s-a)}{bc}}$$

$$\tan \frac{1}{2} A = \frac{r}{s-a}$$

$$\tan \frac{1}{2} B = \frac{r}{s-b}$$

$$\tan \frac{1}{2} C = \frac{r}{s-c}$$

Area of a triangle:

$$\text{Area} = \frac{1}{2} ab \sin C$$

$$\text{Area} = \sqrt{s(s-a)(s-b)(s-c)}$$

PRISMOIDAL FORMULA.

$$\text{Vol.} = \frac{h}{6} (B+b+4M)$$

h = altitude; b, B = bases; M = midsection

TABLE III
INCHES AND FRACTIONS OF AN INCH IN DECIMALS OF A FOOT

	0	1	2	3	4	5	6	7	8	9	10	11
$\frac{1}{16}$.0052	.0885	.1719	.2552	.3385	.4219	.5052	.5885	.6719	.7552	.8385	.9219
$\frac{1}{8}$.0104	.0938	.1771	.2604	.3438	.4271	.5104	.5938	.6771	.7604	.8438	.9271
$\frac{3}{16}$.0156	.0990	.1823	.2656	.3490	.4323	.5156	.5990	.6823	.7656	.8490	.9323
$\frac{1}{4}$.0208	.1042	.1875	.2708	.3542	.4375	.5208	.6042	.6875	.7708	.8542	.9375
$\frac{5}{16}$.0260	.1094	.1927	.2760	.3594	.4427	.5260	.6094	.6927	.7760	.8594	.9427
$\frac{3}{8}$.0313	.1146	.1979	.2813	.3646	.4479	.5313	.6146	.6979	.7813	.8646	.9479
$\frac{7}{16}$.0365	.1198	.2031	.2865	.3698	.4531	.5365	.6198	.7031	.7865	.8698	.9531
$\frac{1}{2}$.0417	.1250	.2083	.2917	.3750	.4583	.5417	.6250	.7083	.7917	.8750	.9583
$\frac{9}{16}$.0469	.1302	.2135	.2969	.3803	.4635	.5469	.6302	.7135	.7969	.8802	.9635
$\frac{5}{8}$.0521	.1354	.2188	.3021	.3854	.4688	.5521	.6354	.7188	.8021	.8854	.9688
$\frac{11}{16}$.0573	.1406	.2240	.3073	.3906	.4740	.5573	.6406	.7240	.8073	.8906	.9740
$\frac{3}{4}$.0625	.1458	.2292	.3125	.3958	.4792	.5625	.6458	.7292	.8125	.8958	.9792
$\frac{7}{8}$.0677	.1510	.2344	.3177	.4010	.4844	.5677	.6510	.7344	.8177	.9010	.9844
$\frac{15}{16}$.0729	.1563	.2396	.3229	.4063	.4896	.5729	.6563	.7396	.8229	.9063	.9896
$\frac{1}{2}$.0781	.1615	.2448	.3281	.4115	.4948	.5781	.6615	.7448	.8281	.9115	.9948
$\frac{13}{16}$.0833	.1667	.2500	.3333	.4167	.5000	.5833	.6667	.7500	.8333	.9167	1.000
1	0	1	2	3	4	5	6	7	8	9	10	11

TABLE IV
USEFUL RELATIONS.

Lineal feet	×.00019	= miles
Lineal yards	×.0006	= miles
Square inches	×.007	= square feet
Square feet	×.111	= square yards
Square yards	×.0002067	= acres
Acres	×4840	= square yards
Cubic inches	×.00058	= cubic feet
Cubic feet	×.03704	= cubic yards
Links	×.22	= yards
Links	×.66	= feet
Feet	×1.5	= links

$$360^\circ = 21600' = 1296000''$$

$$\text{Radius} = \text{arc of } 57.2957790^\circ$$

$$\text{Arc of } 1^\circ (\text{radius} = 1) = .017453292$$

$$\text{Arc of } 1' (\text{radius} = 1) = .000290888$$

$$\text{Arc of } 1'' (\text{radius} = 1) = .000004848$$

$$\pi = 3.141592654 \quad \sqrt{\frac{1}{4}} = 0.564190$$

$$\frac{\pi}{4} = 0.785398163 \quad \sqrt[3]{\frac{6}{\pi}} = 1.240700982$$

$$\frac{\pi}{6} = 0.523598776 \quad \pi^2 = 9.869604401$$

$$\sqrt{\frac{4}{\pi}} = 1.128379167 \quad \frac{1}{\pi^2} = 0.101321184$$

$$\frac{\pi}{6} = 0.523598776 \quad \sqrt{\pi} = 1.772453851$$

$$\frac{4\pi}{3} = 4.188790205 \quad \frac{1}{\pi} = 0.3183099$$

Curvature of Earth's surface = about 0.7 feet in 1 mile

Curvature in feet = 0.667 (Dist. in miles)²

Difference between arc and chord length, 0.05 feet in 11½ miles

$$\text{Probable error of a single observation} = 0.6754 \sqrt{\frac{Mv^2}{n-1}}$$

Error in chaining of 0.01 feet in 100 feet:

Due to—

1. Length of tape error of 0.01 feet
2. Alignment. One end 1.4 feet out of line
3. Sag of tape at centre of 0.61 feet.
4. Temperature difference of 15°
5. Difference of pull of 15 lbs.

STADIA REDUCTION FORMULÆ.

$$\text{Horizontal Distance} = R - R \sin^2 a + C \cos a$$

$$\text{Vertical Distance} = R \frac{1}{2} \sin^2 a + C \sin a$$

$$R = \text{Reading} \times \frac{\text{distance from Object glass to cross hairs}}{\text{distance between cross hairs}}$$

C = distance from Object glass to cross hairs + distance from Object glass to center of instrument.

a = angle of elevation for mid Reading

TABLE VI (continued)
SINES, COSINES, TANGENTS, COTANGENTS (continued)

deg.	sin 0'	tan 0'	sin 10'	tan 10'	sin 20'	tan 20'	sin 30'	tan 30'	sin 40'	tan 40'	sin 50'	tan 50'	deg.
46	7193	1.0355	7214	1.0416	7234	1.0477	7254	1.0533	7274	1.0599	7294	1.0661	43
47	314	.0724	333	.0786	353	.0850	373	.0913	392	.0977	412	.1041	42
48	431	.1106	451	.1171	470	.1237	490	.1303	509	.1369	528	.1436	41
49	547	.1504	566	.1571	585	.1640	604	.1708	623	.1778	642	.1847	40
50	660	1.1918	7679	1.1988	7698	1.2059	7716	1.2131	7735	1.2203	7753	1.2276	39
51	771	.2349	790	.2423	808	.2497	826	.2572	844	.2647	862	.2723	38
52	880	.2799	898	.2876	916	.2954	934	.3032	951	.3111	969	.3190	37
53	986	.3270	8004	.3351	8021	.3452	8039	.3514	8056	.3597	8073	.3680	36
54	8090	.3764	107	.3848	124	.3934	141	.4019	158	.4106	175	.4193	35
55	192	.4281	208	.4370	225	.4460	241	.4550	258	.4641	274	.4733	34
56	290	.4826	307	.4919	323	.5013	339	.5108	355	.5204	371	.5301	33
57	387	.5399	403	.5497	418	.5597	434	.5697	450	.5798	465	.5900	32
58	480	.6003	496	.6107	511	.6212	526	.6319	542	.6426	557	.6534	31
59	572	.6643	587	.6753	601	.6864	616	.6977	631	.7090	646	.7205	30
60	660	1.7321	8675	1.7437	8689	1.7556	8704	1.7675	8718	1.7797	8732	1.7917	29
61	746	.8040	760	.8165	774	.8291	788	.8418	802	.8546	816	.8676	28
62	829	.8807	843	.8940	857	.9074	870	.9210	884	.9347	897	.9486	27
63	910	.9626	923	.9768	936	.9912	949	2.0057	962	2.0204	975	2.0353	26
64	988	2.0503	9001	2.0655	9013	2.0809	9026	.0965	9038	.1123	9051	.1283	25
65	9063	.1445	075	.1609	088	.1775	100	.1943	112	.2113	124	.2286	24
66	135	.2460	147	.2637	159	.2817	171	.2998	182	.3183	194	.3369	23
67	205	.3559	216	.3750	228	.3945	239	.4142	250	.4342	261	.4545	22
68	272	.4751	283	.4960	293	.5172	304	.5386	315	.5605	325	.5826	21
69	336	.6051	346	.6279	356	.6511	367	.6746	377	.6985	387	.7228	20
70	397	2.7475	9407	2.7725	9417	2.7980	9426	2.8239	9436	2.8502	9446	2.8770	19
71	455	.9042	465	.9319	474	.9600	483	.9887	492	3.0178	502	3.0475	18
72	511	3.0777	520	3.1084	528	3.1397	537	3.1716	546	.2041	555	.2371	17
73	563	.2709	572	.3052	580	.3402	588	.3759	596	.4124	605	.4495	16
74	613	.4874	621	.5261	628	.5656	636	.6059	644	.6470	652	.6891	15
75	659	.7321	667	.7760	674	.8208	681	.8657	689	.9136	696	.9617	14
76	703	4.0108	710	4.0611	717	4.1126	724	4.1653	730	4.2193	737	4.2747	13
77	744	.3315	750	.3897	757	.4494	763	.5107	769	.5736	775	.6382	12
78	781	.7046	787	.7729	793	.8430	799	.9152	805	.9894	811	5.0658	11
79	816	.1446	822	5.2257	827	5.3093	833	5.3955	838	5.4845	843	.5764	10
80	9348	5.6713	9353	5.7694	9358	5.8708	9363	5.9758	9368	6.0844	9372	6.1970	9
81	877	6.3138	881	6.4348	886	6.5606	890	6.6912	894	.8269	899	.9682	8
82	903	7.1154	907	7.2687	911	7.4287	914	7.5958	918	7.7704	922	7.9530	7
83	925	8.1443	929	8.3450	932	8.5555	936	8.7769	939	9.0098	942	9.2553	6
84	945	9.5144	948	9.7882	951	10.078	954	10.385	957	10.711	959	11.059	5
85	962	11.430	964	11.826	967	12.250	969	12.706	971	13.197	974	13.727	4
86	976	14.300	978	14.924	980	15.605	981	16.350	983	17.169	985	18.075	3
87	986	19.081	988	20.206	989	21.470	990	22.903	992	24.542	993	26.432	2
88	994	28.636	995	31.242	996	34.368	997	38.189	997	42.964	998	49.104	1
89	9998	57.290	9999	68.750	9999	85.940	9999	114.58	1.000	171.88	1.000	343.77	0
deg.	60'	60'	50'	50'	40'	40'	30'	30'	20'	30'	10'	10'	deg.
	cos	cot	cos	cot	cos	cot	cos	cot	cos	cot	cos	cot	

TABLE VII
RODS IN FEET AND INCHES

Rods	Feet Inches	Rods	Feet Inches	Rods	Feet Inches	Rods	Feet Inches	Rods	Feet Inches
1	16-6	21	346-6	41	676-6	61	1006-6	81	1336-6
2	33-0	22	363-0	42	693-0	62	1023-0	82	1353-0
3	49-6	23	379-6	43	709-6	63	1039-6	83	1369-6
4	66-0	24	396-0	44	726-0	64	1056-0	84	1386-0
5	82-6	25	412-6	45	742-6	65	1072-6	85	1402-6
6	99-0	26	429-0	46	759-0	66	1089-0	86	1419-0
7	115-6	27	445-6	47	775-6	67	1105-6	87	1435-6
8	132-0	28	462-0	48	792-0	68	1122-0	88	1452-0
9	148-6	29	478-6	49	808-6	69	1138-6	89	1468-6
10	165-0	30	495-0	50	825-0	70	1155-0	90	1485-0
11	181-6	31	511-6	51	841-6	71	1171-6	91	1501-6
12	198-0	32	528-0	52	858-0	72	1188-0	92	1518-0
13	214-6	33	544-6	53	874-6	73	1204-6	93	1534-6
14	231-0	34	561-0	54	891-0	74	1221-0	94	1551-0
15	247-6	35	577-6	55	907-6	75	1237-6	95	1567-6
16	264-0	36	594-0	56	924-0	76	1254-0	96	1584-0
17	280-6	37	610-6	57	940-6	77	1270-6	97	1600-6
18	297-0	38	627-0	58	957-0	78	1287-0	98	1617-0
19	313-6	39	643-6	59	973-6	79	1303-6	99	1633-6
20	330-0	40	660-0	60	990-0	80	1320-0	100	1650-0

TABLE VIII
LINKS IN FEET AND INCHES

Links	Feet Inches	Links	Feet Inches	Links	Feet Inches	Links	Feet Inches	Links	Feet Inches	Links	Feet Inches
1	0-7.92	18	11-10.56	35	23-1.20	52	34-3.84	69	45-6.48	86	56-9.12
2	1-3.84	19	12-6.48	36	23-9.12	53	34-11.76	70	46-2.40	87	57-5.04
3	1-11.76	20	13-2.40	37	24-5.04	54	35-7.68	71	46-10.32	88	58-0.96
4	2-7.68	21	13-10.32	38	25-0.96	55	36-3.60	72	47-6.24	89	58-8.88
5	3-3.60	22	14-6.24	39	25-8.88	56	36-11.52	73	48-2.16	90	59-4.80
6	3-11.52	23	15-2.16	40	26-4.80	57	37-7.44	74	48-10.08	91	60-0.72
7	4-7.44	24	15-10.08	41	27-0.72	58	38-3.36	75	49-6.00	92	60-8.64
8	5-3.36	25	16-6.00	42	27-8.64	59	38-11.28	76	50-1.92	93	61-4.56
9	5-11.28	26	17-1.92	43	28-4.56	60	39-7.20	77	50-9.84	94	62-0.48
10	6-7.20	27	17-9.84	44	29-0.48	61	40-3.12	78	51-5.76	95	62-8.40
11	7-3.12	28	18-5.76	45	29-8.40	62	40-11.04	79	52-1.68	96	63-4.32
12	7-11.04	29	19-1.68	46	30-4.32	63	41-6.96	80	52-9.60	97	64-0.24
13	8-6.96	30	19-9.60	47	31-0.24	64	42-2.88	81	53-5.52	98	64-8.16
14	9-2.88	31	20-5.52	48	31-8.16	65	42-10.80	82	54-1.44	99	65-4.08
15	9-10.80	32	21-1.44	49	32-4.08	66	43-6.72	83	54-9.36	100	66-0.00
16	10-6.72	33	21-9.36	50	33-0.00	67	44-2.64	84	55-5.28	101	66-7.92
17	11-2.64	34	22-5.28	51	33-7.92	68	44-10.56	85	56-1.20	102	67-3.84

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=10°	I	T	E	I=20°	I	T	E	I=30°
1°	50.00	.218	+	11°	551.70	26.500	+	21°	1061.9	97.577	+
10'	58.34	.297	5° C.	10'	560.11	27.313	5° C	10'	1070.6	99.155	5° C
20'	66.67	.388	T	20'	568.53	28.137	T	20'	1079.2	100.775	T
30'	75.01	.491	T	30'	576.95	28.974	T	30'	1087.8	102.355	T
40'	83.34	.606	.03	40'	585.36	29.824	.06	40'	1096.4	103.97	.10
50'	91.68	.733	E	50'	593.79	30.686	E	50'	1105.1	105.60	E
2°	100.01	.873	.001	12°	602.21	31.561	.006	22°	1113.7	107.24	.013
10'	108.35	1.024		10'	610.64	32.447		10'	1122.4	108.90	
20'	116.68	1.188		20'	619.07	33.347		20'	1131.0	110.57	
30'	125.02	1.364		30'	627.50	34.259		30'	1139.7	112.25	
40'	133.36	1.552		40'	635.93	35.183		40'	1148.4	113.95	
50'	141.70	1.752		50'	644.37	36.120		50'	1157.0	115.66	
3°	150.04	1.964	10° C.	13°	652.81	37.070	10° C.	23°	1165.7	117.38	10° C.
10'	158.38	2.188	T	10'	661.25	38.031	T	10'	1174.4	119.12	T
20'	166.72	2.425	.06	20'	669.70	39.006	.13	20'	1183.1	120.87	.19
30'	175.06	2.674	.06	30'	678.15	39.993	E	30'	1191.8	122.63	E
40'	183.40	2.934	E	40'	686.60	40.992	E	40'	1200.5	124.41	E
50'	191.74	3.207	.003	50'	695.06	42.004	.011	50'	1209.2	126.20	.025
4°	200.08	3.492		14°	703.51	43.029		24°	1217.9	128.00	
10'	208.43	3.790		10'	711.97	44.066		10'	1226.6	129.82	
20'	216.77	4.099		20'	720.44	45.116		20'	1235.3	131.65	
30'	225.12	4.421		30'	728.90	46.178		30'	1244.0	133.50	
40'	233.47	4.755		40'	737.37	47.253		40'	1252.8	135.35	
50'	241.81	5.100	15° C.	50'	745.85	48.341	15° C.	50'	1261.5	137.23	15° C.
5°	250.16	5.459	T	15°	754.32	49.441	T	25°	1270.2	139.11	T
10'	258.51	5.829	.09	10'	762.80	50.554	.10	10'	1279.0	141.01	.29
20'	266.86	6.211	E	20'	771.29	51.679	E	20'	1287.7	142.93	E
30'	275.21	6.606	.004	30'	779.77	52.818	.017	30'	1296.5	144.85	.038
40'	283.57	7.013		40'	788.26	53.969		40'	1305.3	146.79	
50'	291.92	7.432		50'	796.75	55.132		50'	1314.0	148.75	
6°	300.28	7.863		16°	805.25	56.309		26°	1322.8	150.71	
10'	308.64	8.307		10'	813.75	57.498		10'	1331.6	152.69	
20'	316.99	8.762		20'	822.25	58.699		20'	1340.4	154.69	
30'	325.35	9.230		30'	830.76	59.914		30'	1349.2	156.70	
40'	333.71	9.710	20° C.	40'	839.27	61.141	20° C.	40'	1358.0	158.72	20° C.
50'	342.08	10.202	T	50'	847.78	62.381	T	50'	1366.8	160.76	T
7°	350.44	10.707	.13	17°	856.30	63.634	.26	27°	1375.6	162.81	.39
10'	358.81	11.224	E	10'	864.82	64.900	E	10'	1384.4	164.86	E
20'	367.17	11.753	.006	20'	873.35	66.178	.022	20'	1393.2	166.95	.051
30'	375.54	12.294		30'	881.88	67.470		30'	1402.0	169.04	
40'	383.91	12.847		40'	890.41	68.774		40'	1410.9	171.15	
50'	392.28	13.413		50'	898.95	70.091		50'	1419.7	173.27	
8°	400.66	13.991		18°	907.49	71.421		28°	1428.6	175.41	
10'	409.03	14.582	25° C.	10'	916.03	72.764	25° C.	10'	1437.4	177.55	25° C.
20'	417.41	15.184	T	20'	924.58	74.119	T	20'	1446.3	179.72	T
30'	425.79	15.799	.16	30'	933.13	75.488	.32	30'	1455.1	181.89	.49
40'	434.17	16.426	E	40'	941.69	76.869	E	40'	1464.0	184.08	E
50'	442.55	17.065		50'	950.25	78.264		50'	1472.9	186.29	
9°	450.93	17.717	.007	19°	958.81	79.671	.028	29°	1481.8	188.51	.065
10'	459.32	18.381		10'	967.38	81.092		10'	1490.7	190.74	
20'	467.71	19.058		20'	975.96	82.525		20'	1499.6	192.99	
30'	476.10	19.746		30'	984.53	83.972		30'	1508.5	195.25	
40'	484.49	20.447		40'	993.12	85.431		40'	1517.4	197.53	
50'	492.88	21.161		50'	1001.7	86.904		50'	1526.3	199.82	
10°	501.28	21.887	30° C.	20°	1010.3	88.389	30° C.	30°	1535.3	202.12	30° C.
10'	509.68	22.624	T	10'	1018.9	89.888	T	10'	1544.2	204.44	T
20'	518.08	23.375	.19	20'	1027.5	91.399	.39	20'	1553.1	206.77	.59
30'	526.48	24.138	E	30'	1036.1	92.924	E	30'	1562.1	209.12	E
40'	534.89	24.913	.008	40'	1044.7	94.462	.034	40'	1571.0	211.48	.078
50'	543.29	25.700		50'	1053.3	96.013		50'	1580.0	213.86	

T = R tan ½ I

E = R exsec ½ I

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=40°	I	T	E	I=50°	I	T	E	I=60°
31°	1589.0	216.3	+	41°	2142.2	387.4	+	51°	2732.9	618.4	+
10'	1598.0	218.7	5° C.	10'	2151.7	390.7	5° C.	10'	2743.1	622.8	5° C.
20'	1606.9	221.1	T	20'	2161.2	394.1	T	20'	2753.4	627.2	T
30'	1615.9	223.5	.13	30'	2170.8	397.4	.17	30'	2763.7	631.7	.21
40'	1624.9	226.0	E	40'	2180.3	400.8	E	40'	2773.9	636.2	E
50'	1633.9	228.4	.023	50'	2189.9	404.2	.037	50'	2784.2	640.7	.056
32°	1643.0	230.9		42°	2199.4	407.6		52°	2794.5	645.2	
10'	1652.0	233.4		10'	2209.0	411.1		10'	2804.9	649.7	
20'	1661.0	235.9		20'	2218.6	414.5		20'	2815.2	654.3	
30'	1670.0	238.4		30'	2228.1	418.0		30'	2825.6	658.8	
40'	1679.1	241.0		40'	2237.7	421.4		40'	2835.9	663.4	
50'	1688.1	243.5		50'	2247.3	425.0		50'	2846.3	668.0	
33°	1697.2	246.1	10° C.	43°	2257.0	428.5	10° C.	53°	2856.7	672.7	10° C.
10'	1706.3	248.7	T	10'	2266.6	432.0	T	10'	2867.1	677.3	T
20'	1715.3	251.3	.26	20'	2276.2	435.6	.34	20'	2877.5	682.0	.42
30'	1724.4	253.9	E	30'	2285.9	439.2	E	30'	2888.0	686.7	E
40'	1733.5	256.5	.046	40'	2295.6	442.8	.075	40'	2898.4	691.4	.112
50'	1742.6	259.1		50'	2305.2	446.4		50'	2908.9	696.1	
34°	1751.7	261.8		44°	2314.9	450.0		54°	2919.4	700.9	
10'	1760.8	264.5		10'	2324.6	453.6		10'	2929.9	705.7	
20'	1770.0	267.2		20'	2334.3	457.3		20'	2940.4	710.5	
30'	1779.1	269.9		30'	2344.1	461.0		30'	2951.0	715.3	
40'	1788.2	272.6		40'	2353.8	464.6		40'	2961.5	720.1	
50'	1797.4	275.3	15° C.	50'	2363.5	468.4	15° C.	50'	2972.1	725.0	15° C.
35°	1806.6	278.1	T	45°	2373.3	472.1	T	55°	2982.7	729.9	T
10'	1815.7	280.8	.40	10'	2383.1	475.8	.51	10'	2993.3	734.8	.63
20'	1824.9	283.6	E	20'	2392.8	479.6	E	20'	3003.9	739.7	E
30'	1834.1	286.4	.070	30'	2402.6	483.4	.116	30'	3014.5	744.6	.168
40'	1843.3	289.2		40'	2412.4	487.2		40'	3025.2	749.6	
50'	1852.5	292.0		50'	2422.3	491.0		50'	3035.8	754.6	
36°	1861.7	294.9		46°	2432.1	494.8		56°	3046.5	759.6	
10'	1870.9	297.7		10'	2441.9	498.7		10'	3057.2	764.6	
20'	1880.1	300.6		20'	2451.8	502.5		20'	3067.9	769.7	
30'	1889.4	303.5	20° C.	30'	2461.7	506.4	20° C.	30'	3078.7	774.7	20° C.
40'	1898.6	306.4	T	40'	2471.5	510.3	T	40'	3089.4	779.8	T
50'	1907.9	309.3	.53	50'	2481.4	514.3	.68	50'	3100.2	784.9	.84
37°	1917.1	312.2	E	47°	2491.3	518.2	E	57°	3110.9	790.1	E
10'	1926.4	315.2	.093	10'	2501.2	522.2	.151	10'	3121.7	795.2	.225
20'	1935.7	318.1		20'	2511.2	526.1		20'	3132.6	800.4	
30'	1945.0	321.1		30'	2521.1	530.1		30'	3143.4	805.6	
40'	1954.3	324.1		40'	2531.1	534.2		40'	3154.2	810.9	
50'	1963.6	327.1		50'	2541.0	538.2		50'	3165.1	816.1	
38°	1972.9	330.2		48°	2551.0	542.2		58°	3176.0	821.4	
10'	1982.2	333.2	25° C.	10'	2561.0	546.3	25° C.	10'	3186.9	826.7	25° C.
20'	1991.5	336.3	T	20'	2571.0	550.4	T	20'	3197.8	832.0	T
30'	2000.9	339.3	.85	30'	2581.0	554.5	.85	30'	3208.8	837.3	.85
40'	2010.2	342.4	E	40'	2591.0	558.6	E	40'	3219.7	842.7	E
50'	2019.6	345.5	.117	50'	2601.1	562.8	.189	50'	3230.7	848.1	.189
39°	2029.0	348.6		49°	2611.2						

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=70°	I	T	E	I=80°	I	T	E	I=90°
61°	3375.0	920.2	+	71°	4086.9	1308.2	+	81°	4893.6	1805.3	+
10'	3386.3	925.9		10'	4099.5	1315.6		10'	4908.0	1814.7	
20'	3397.5	931.6	5° C.	20'	4112.1	1322.9	5° C.	20'	4922.5	1824.1	5° C.
30'	3408.8	937.3	T	30'	4124.8	1330.3	T	30'	4937.0	1833.6	T
40'	3420.1	943.1	.25	40'	4137.4	1337.7	.30	40'	4951.5	1843.1	.36
50'	3431.4	948.9	E	50'	4150.1	1345.1	E	50'	4966.1	1852.6	E
62°	3442.7	954.8	.080	72°	4162.8	1352.6	.110	82°	4980.7	1862.2	.149
10'	3454.1	960.6		10'	4175.6	1360.1		10'	4995.4	1871.8	
20'	3465.4	966.5		20'	4188.5	1367.6		20'	5010.0	1881.5	
30'	3476.8	972.4		30'	4201.2	1375.2		30'	5024.8	1891.2	
40'	3488.3	978.3		40'	4214.0	1382.8		40'	5039.5	1900.9	
50'	3499.7	984.3		50'	4226.8	1390.4		50'	5054.3	1910.7	
63°	3511.1	990.2	10° C.	73°	4239.7	1398.0	10° C.	83°	5069.2	1920.5	10° C.
10'	3522.6	996.2	T	10'	4252.6	1405.7	T	10'	5084.0	1930.4	T
20'	3534.1	1002.3		20'	4265.6	1413.5	.61	20'	5099.0	1940.3	.72
30'	3545.6	1008.3	.51	30'	4278.5	1421.2	E	30'	5113.9	1950.3	E
40'	3557.2	1014.4	E	40'	4291.5	1429.0	E	40'	5128.9	1960.2	E
50'	3568.7	1020.5	.159	50'	4304.6	1436.8	.220	50'	5143.9	1970.3	.299
64°	3580.3	1026.6		74°	4317.6	1444.6		84°	5159.0	1980.4	
10'	3591.9	1032.8		10'	4330.7	1452.5		10'	5174.1	1990.5	
20'	3603.5	1039.0		20'	4343.8	1460.4		20'	5189.3	2000.6	
30'	3615.1	1045.2		30'	4356.9	1468.4		30'	5204.4	2010.8	
40'	3626.8	1051.4		40'	4370.1	1476.4		40'	5219.7	2021.1	
50'	3638.5	1057.7		50'	4383.3	1484.4		50'	5234.9	2031.4	
65°	3650.2	1063.9	15° C.	75°	4396.5	1492.4	15° C.	85°	5250.3	2041.7	15° C.
10'	3661.9	1070.2	T	10'	4409.8	1500.5	T	10'	5265.6	2052.1	T
20'	3673.7	1076.6	.76	20'	4423.1	1508.6	.91	20'	5281.0	2062.5	.109
30'	3685.5	1082.9	E	30'	4436.4	1516.7	E	30'	5296.4	2073.0	E
40'	3697.2	1089.3	.240	40'	4449.7	1524.9	.332	40'	5311.9	2083.5	.450
50'	3709.0	1095.7		50'	4463.1	1533.1		50'	5327.4	2094.1	
66°	3720.9	1102.2		76°	4476.5	1541.4		86°	5343.0	2104.7	
10'	3732.7	1108.6		10'	4489.9	1549.7		10'	5358.6	2115.3	
20'	3744.6	1115.1		20'	4503.4	1558.0		20'	5374.2	2126.0	
30'	3756.5	1121.7		30'	4516.9	1566.3		30'	5389.9	2136.7	
40'	3768.5	1128.2	20° C.	40'	4530.4	1574.7	20° C.	40'	5405.6	2147.5	20° C.
50'	3780.4	1134.8	T	50'	4544.0	1583.1	T	50'	5421.4	2158.4	T
67°	3792.4	1141.4	1.02	77°	4557.6	1591.6	1.22	87°	5437.2	2169.2	1.45
10'	3804.4	1148.0	E	10'	4571.2	1600.1	E	10'	5453.1	2180.2	E
20'	3816.4	1154.7	.321	20'	4584.8	1608.6	.445	20'	5469.0	2191.1	.603
30'	3828.4	1161.3		30'	4598.5	1617.1		30'	5484.9	2202.2	
40'	3840.5	1168.1		40'	4612.2	1625.7		40'	5500.9	2213.2	
50'	3852.6	1174.8		50'	4626.0	1634.4		50'	5517.0	2224.3	
68°	3864.7	1181.6		78°	4639.8	1643.0		88°	5533.1	2235.5	
10'	3876.8	1188.4		10'	4653.6	1651.7		10'	5549.2	2246.7	
20'	3889.0	1195.2	25° C.	20'	4667.4	1660.5	25° C.	20'	5565.4	2258.0	25° C.
30'	3901.2	1202.0	T	30'	4681.3	1669.2	T	30'	5581.6	2269.3	T
40'	3913.4	1208.9	1.28	40'	4695.2	1678.1	1.53	40'	5597.8	2280.6	1.83
50'	3925.6	1215.8	E	50'	4709.2	1686.9	E	50'	5614.2	2292.0	E
69°	3937.7	1222.7	.403	79°	4723.2	1695.8	.558	89°	5630.5	2303.5	.756
10'	3950.2	1229.7		10'	4737.2	1704.7		10'	5646.9	2315.0	
20'	3962.5	1236.7		20'	4751.2	1713.7		20'	5663.4	2326.6	
30'	3974.8	1243.7		30'	4765.3	1722.7		30'	5679.9	2338.2	
40'	3987.2	1250.8		40'	4779.4	1731.7		40'	5696.4	2349.8	
50'	3999.5	1257.9		50'	4793.6	1740.8		50'	5713.0	2361.5	
70°	4011.9	1265.0	30° C.	80°	4807.7	1749.9	30° C.	90°	5729.7	2373.3	30° C.
10'	4024.4	1272.1	T	10'	4822.0	1759.0	T	10'	5746.3	2385.1	T
20'	4036.8	1279.3	1.54	20'	4836.2	1768.2	1.84	20'	5763.1	2397.0	2.20
30'	4049.3	1286.5	E	30'	4850.5	1777.4	E	30'	5779.9	2408.9	E
40'	4061.8	1293.6		40'	4864.8	1786.7		40'	5796.7	2420.9	
50'	4074.4	1300.9	.485	50'	4879.2	1796.0	.671	50'	5813.6	2432.9	.910

T = R tan ½ I

E = R exsec ½ I

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=100°	I	T	E	I=110°	I	T	E	I=120°
91°	5830.5	2444.9	+	101°	6950.6	3278.1	+	111°	8336.7	4386.1	+
10'	5847.5	2457.1		10'	6971.3	3294.1		10'	8362.7	4407.6	
20'	5864.6	2469.3	5° C.	20'	6992.0	3310.1	5° C.	20'	8388.9	4429.2	5° C.
30'	5881.7	2481.5	T	30'	7012.7	3326.1	T	30'	8415.1	4450.9	T
40'	5898.8	2493.8	.43	40'	7033.6	3342.3	.51	40'	8441.5	4472.7	.62
50'	5916.0	2506.1	E	50'	7054.5	3358.5	E	50'	8468.0	4494.6	E
92°	5933.2	2518.5	.200	102°	7075.5	3374.9	.268	112°	8494.6	4516.6	.360
10'	5950.5	2531.0		10'	7096.6	3391.2		10'	8521.3	4538.8	
20'	5967.9	2543.5		20'	7117.8	3407.7		20'	8548.1	4561.1	
30'	5985.3	2556.0		30'	7139.0	3424.3		30'	8575.0	4583.4	
40'	6002.7	2568.6		40'	7160.3	3440.9		40'	8602.1	4606.0	
50'	6020.2	2581.3		50'	7181.7	3457.6		50'	8629.3	4628.6	
93°	6037.8	2594.0	10° C.	103°	7203.2	3474.4	10° C.	113°	8656.6	4651.3	10° C.
10'	6055.4	2606.8	T	10'	7224.7	3491.3	T	10'	8684.0	4674.2	T
20'	6073.1	2619.7	.86	20'	7246.3	3508.2	.103	20'	8711.5	4697.2	.125
30'	6090.8	2632.6	E	30'	7268.0	3525.2	F	30'	8739.2	4720.3	E
40'	6108.6	2645.5	E	40'	7289.8	3542.4	F	40'	8767.0	4743.6	E
50'	6126.4	2658.5	.401	50'	7311.7	3559.6	.536	50'	8794.9	4766.9	.721
94°	6144.3	2671.6		104°	7333.6	3576.8		114°	8822.9	4790.4	
10'	6162.2	2684.7		10'	7355.6	3594.2		10'	8851.0	4814.1	
20'	6180.2	2697.9		20'	7377.8	3611.7		20'	8879.3	4837.8	
30'	6198.3	2711.2		30'	7399.9	3629.2		30'	8907.7	4861.7	
40'	6216.4	2724.5		40'	7422.2	3646.8		40'	8936.3	4885.7	
50'	6234.6	2737.9		50'	7444.6	3664.5		50'	8965.0	4909.9	
95°	6252.8	2751.3	15° C.	105°	7467.0	3682.3	15° C.	115°	8993.8	4934.1	15° C.
10'	6271.1	2764.8	T	10'	7489.6	3700.2	T	10'	9022.7	4958.6	T
20'	6289.4	2778.3	1.30	20'	7512.2	3718.2	1.56	20'	9051.7	4983.1	1.93
30'	6307.9	2792.0	E	30'	7534.9	3736.2	E	30'	9080.9	5007.8	E
40'	6326.3	2805.6	.604	40'	7557.7	3754.4	.806	40'	9110.3	5032.6	1.09
50'	6344.8	2819.4		50'	7580.5	3772.6		50'	9139.8	5057.6	
96°	6363.4	2833.2		106°	7603.5	3791.0		116°	9169.4	5082.7	
10'	6382.1	2847.0		10'	7626.6	3809.4		10'	9199.1	5107.9	
20'	6400.8	2861.0		20'	7649.9	3827.9		20'	9229.0	5133.3	
30'	6419.5	2875.0		30'	7672.9	3846.5		30'	9259.0	5158.8	
40'	6438.4	2889.0	20° C.	40'	7696.3	3865.2	20° C.	40'	9289.2	5184.5	20° C.
50'	6457.3	2903.1	T	50'	7719.7	3884.0	T	50'	9319.5	5210.3	T
97°	6476.2	2917.3	1.74	107°	7743.2	3902.9	2.08	117°	9349.9	5236.2	2.52
10'	6495.2	2931.6	E	10'	7766.8	3921.9	E	10'	9380.5	5262.3	E
20'	6514.3	2945.9	.809	20'	7790.5	3940.9	1.08	20'	9411.3	5288.6	1.46
30'	6533.4	2960.3		30'	7814.3	3960.1		30'	9442.2	5315.0	
40'	6552.6	2974.7		40'	7838.1	3979.4		40'	9473.2	5341.5	
50'	6571.9	2989.2		50'	7862.1	3998.7		50'	9504.4	5368.2	
98°	6591.2	3003.8		108°	7886.2	4018.2		118°	9535.7	5395.1	
10'	6610.6	3018.4		10'	7910.4	4037.8		10'	9567.2	5422.1	
20'	6630.1	3033.1	25° C.	20'	7934.6	4057.4	25° C.	20'	9598.9	5449.2	25° C.
30'	6649.6	3047.9	T	30'	7959.0	4077.2	T	30'	9630.7	5476.5	T
40'	6669.2	3062.8	2.18	40'	7983.						

TABLE X.
MIDDLE ORDINATES OF RAILS
Length of Rail (feet)

C o /	R Feet	30 Inch	28 Inch	26 Inch	24 Inch	22 Inch	20 Inch	C o	R Feet	30 Inch	28 Inch	26 Inch	24 Inch	22 Inch	20 Inch
0-20	17189	.08	.07	.06	.05	.04	.03	8	716.8	1.88	1.64	1.42	1.20	1.01	.84
0-40	8594	.16	.14	.12	.10	.08	.07	9	637.3	2.12	1.84	1.60	1.35	1.14	.94
1-0	5730	.24	.20	.18	.15	.13	.10	10	573.7	2.36	2.05	1.78	1.50	1.27	1.04
1-20	4297	.31	.27	.23	.20	.17	.13	11	521.7	2.59	2.26	1.95	1.65	1.39	1.15
1-40	3438	.39	.34	.29	.25	.21	.17	12	478.3	3.83	2.47	2.15	1.81	1.54	1.26
2-0	2865	.47	.41	.35	.30	.25	.20	13	441.7	3.05	2.66	2.30	1.96	1.66	1.36
2-20	2456	.55	.48	.41	.35	.29	.23	14	410.3	3.30	2.87	2.48	2.10	1.78	1.46
2-40	2149	.63	.55	.47	.40	.33	.27	15	383.1	3.54	3.08	2.68	2.26	1.91	1.57
3-0	1910	.71	.62	.53	.45	.38	.31	16	359.3	3.76	3.28	2.83	2.40	2.04	1.67
3-20	1719	.78	.68	.59	.50	.42	.35	17	338.3	4.00	3.48	3.02	2.57	2.16	1.78
3-40	1563	.86	.75	.65	.55	.46	.38	18	319.6	4.21	3.67	3.18	2.70	2.28	1.87
4-0	1433	.94	.82	.71	.60	.50	.42	19	302.9	4.45	3.89	3.36	2.86	2.41	1.98
4-20	1323	1.02	.89	.77	.65	.55	.45	20	287.9	4.70	4.09	3.55	3.00	2.54	2.09
4-40	1228	1.10	.96	.83	.70	.59	.48	22	262.0	5.16	4.44	3.84	3.30	2.80	2.29
5	1146	1.18	1.03	.89	.75	.63	.52	24	240.5	5.64	4.92	4.20	3.59	3.04	2.50
6	955.3	1.41	1.23	1.06	.90	.76	.62	26	222.3	6.07	5.29	4.58	3.88	3.29	2.70
7	819.0	1.65	1.44	1.24	1.05	.89	.73								

TABLE XI.
SHORT RADIUS CURVES

Radius Feet	Chord Feet	Central Angle	Deflection Angle	Deflection for 1 Foot
35	10	16-26	8-13	49.3
45	10	12-46	6-23	38.3
50	15	17-16	8-38	34.5
60	15	14-22	7-11	28.8
75	15	11-30	5-45	23.0
100	20	11-30	5-45	17.3
120	20	9-34	4-47	14.3
150	20	7-39	3-49	11.5
190	25	7-32	3-46	9.15
200	25	7-10	3-35	8.6
225	25	6-25	3-12	7.7
240	25	5-58	2-59	7.2
250	25	5-44	2-52	6.9
275	25	5-12	2-36	6.2
288	50	9-58	4-59	6.0
300	50	9-32	4-46	5.7
350	50	8-12	4-06	4.9
376	50	7-40	3-50	4.6
400	50	7-10	3-35	4.3
410	50	7-00	3-30	4.2

To find length of curve divide angle from P. C. to P. T. by central angle of chord and multiply by length of chord.


TABLE XII.
INCLINED DISTANCE OF 100 FT. REDUCED TO HORIZONTAL

Slope	Horizontal Distance	Correction	Rise	Slope	Horizontal Distance	Correction	Rise
0°00'	100.000	0.000	0.000	8°00'	99.027	0.973	0.139
15'	99.999	0.001	0.004	15'	98.965	1.035	0.143
30'	99.996	0.004	0.009	30'	98.902	1.098	0.148
45'	99.991	0.009	0.013	45'	98.836	1.164	0.152
1 00	99.985	0.015	0.017	9 00	98.769	1.231	0.156
15	99.976	0.024	0.022	15	98.700	1.300	0.161
30	99.966	0.034	0.026	30	98.629	1.371	0.165
45	99.953	0.047	0.031	45	98.556	1.444	0.169
2 00	99.939	0.061	0.035	10 00	98.481	1.519	0.174
15	99.923	0.077	0.039	15	98.404	1.596	0.178
30	99.905	0.095	0.044	30	98.325	1.675	0.182
45	99.885	0.115	0.048	45	98.245	1.755	0.187
3 00	99.863	0.137	0.052	11 00	98.163	1.837	0.191
15	99.839	0.161	0.057	15	98.079	1.921	0.195
30	99.813	0.187	0.061	30	97.992	2.008	0.199
45	99.786	0.214	0.065	45	97.905	2.095	0.204
4 00	99.756	0.244	0.070	12 00	97.815	2.185	0.208
15	99.725	0.275	0.074	15	97.723	2.277	0.212
30	99.692	0.308	0.078	30	97.630	2.370	0.216
45	99.657	0.343	0.083	45	97.534	2.466	0.221
5 00	99.619	0.381	0.087	13 00	97.437	2.563	0.225
15	99.580	0.420	0.092	15	97.338	2.662	0.229
30	99.540	0.460	0.096	30	97.237	2.763	0.233
45	99.497	0.503	0.100	45	97.134	2.866	0.238
6 00	99.452	0.548	0.105	14 00	97.030	2.970	0.242
15	99.406	0.594	0.109	15	96.923	3.077	0.246
30	99.357	0.643	0.113	30	96.815	3.185	0.250
45	99.307	0.693	0.118	45	96.705	3.295	0.255
7 00	99.255	0.745	0.122	15 00	96.593	3.407	0.259
15	99.200	0.800	0.126	15	96.479	3.521	0.263
30	99.144	0.856	0.131	30	96.363	3.637	0.267
45	99.087	0.913	0.135	45	96.246	3.754	0.271

For each foot take one one-hundredth of each reading.

TABLE XIII.
MINUTES IN DECIMALS OF A DEGREE.

0 30"	.00833	10' 30"	.17500	20' 30"	.34167	30' 10"	.50833	40' 30"	.67500	50' 10"	.84167
1 00	.01667	11 00	.18333	21 00	.35000	31 00	.51667	41 00	.68333	51 00	.85000
30	.02500	30	.19167	30	.35833	30	.52500	30	.69167	30	.85833
2 00	.03333	12 00	.20000	22 00	.36667	32 00	.53333	42 00	.70000	52 00	.86667
30	.04167	30	.20833	30	.37500	30	.54167	30	.70833	30	.87500
3 00	.05000	13 00	.21667	23 00	.38333	33 00	.55000	43 00	.71667	53 00	.88333
30	.05833	30	.22500	30	.39167	30	.55833	30	.72500	30	.89167
4 00	.06667	14 00	.23333	24 00	.40000	34 00	.56667	44 00	.73333	54 00	.90000
30	.07500	30	.24167	30	.40833	30	.57500	30	.74167	30	.90833
5 00	.08333	15 00	.25000	25 00	.41667	35 00	.58333	45 00	.75000	55 00	.91667
30	.09167	30	.25833	30	.42500	30	.59167	30	.75833	30	.92500
6 00	.10000	16 00	.26667	26 00	.43333	36 00	.60000	46 00	.76667	56 00	.93333
30	.10833	30	.27500	30	.44167	30	.60833	30	.77500	30	.94167
7 00	.11667	17 00	.28333	27 00	.45000	37 00	.61667	47 00	.78333	57 00	.95000
30	.12500	30	.29167	30	.45833	30	.62500	30	.79167	30	.95833
8 00	.13333	18 00	.30000	28 00	.46667	38 00	.63333	48 00	.80000	58 00	.96667
30	.14167	30	.30833	30	.47500	30	.64167	30	.80833	30	.97500
9 00	.15000	19 00	.31667	29 00	.48333	39 00	.65000	49 00	.81667	59 00	.98333
30	.15833	30	.32500	30	.49167	30	.65833	30	.82500	30	.99167
10 00	.16667	20 00	.33333	30 00	.50000	40 00	.66667	50 00	.83333	60 00	1.00000

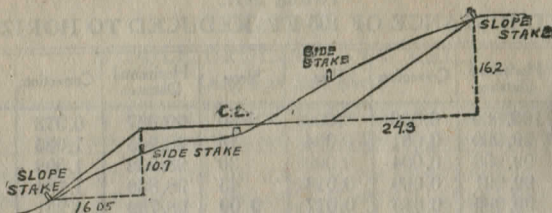

DISTANCES FROM SIDE STAKES FOR CROSS-SECTIONING.

SLOPE 1 1/2 TO 1. ROADWAY OF ANY WIDTH.

	0	.1	.2	.3	.4	.5	.6	.7	.8	.9	
0	0 00	0 15	0 30	0 45	0 60	0 75	0 90	1 05	1 20	1 35	0
1	1 50	1 65	1 80	1 95	2 10	2 25	2 40	2 55	2 70	2 85	1
2	3 00	3 15	3 30	3 45	3 60	3 75	3 90	4 05	4 20	4 35	2
3	4 50	4 65	4 80	4 95	5 10	5 25	5 40	5 55	5 70	5 85	3
4	6 00	6 15	6 30	6 45	6 60	6 75	6 90	7 05	7 20	7 35	4
5	7 50	7 65	7 80	7 95	8 10	8 25	8 40	8 55	8 70	8 85	5
6	9 00	9 15	9 30	9 45	9 60	9 75	9 90	10 05	10 20	10 35	6
7	10 50	10 65	10 80	10 95	11 10	11 25	11 40	11 55	11 70	11 85	7
8	12 00	12 15	12 30	12 45	12 60	12 75	12 90	13 05	13 20	13 35	8
9	13 50	13 65	13 80	13 95	14 10	14 25	14 40	14 55	14 70	14 85	9
10	15 00	15 15	15 30	15 45	15 60	15 75	15 90	16 05	16 20	16 35	10
11	16 50	16 65	16 80	16 95	17 10	17 25	17 40	17 55	17 70	17 85	11
12	18 00	18 15	18 30	18 45	18 60	18 75	18 90	19 05	19 20	19 35	12
13	19 50	19 65	19 80	19 95	20 10	20 25	20 40	20 55	20 70	20 85	13
14	21 00	21 15	21 30	21 45	21 60	21 75	21 90	22 05	22 20	22 35	14
15	22 50	22 65	22 80	22 95	23 10	23 25	23 40	23 55	23 70	23 85	15
16	24 00	24 15	24 30	24 45	24 60	24 75	24 90	25 05	25 20	25 35	16
17	25 50	25 65	25 80	25 95	26 10	26 25	26 40	26 55	26 70	26 85	17
18	27 00	27 15	27 30	27 45	27 60	27 75	27 90	28 05	28 20	28 35	18
19	28 50	28 65	28 80	28 95	29 10	29 25	29 40	29 55	29 70	29 85	19
20	30 00	30 15	30 30	30 45	30 60	30 75	30 90	31 05	31 20	31 35	20
21	31 50	31 65	31 80	31 95	32 10	32 25	32 40	32 55	32 70	32 85	21
22	33 00	33 15	33 30	33 45	33 60	33 75	33 90	34 05	34 20	34 35	22
23	34 50	34 65	34 80	34 95	35 10	35 25	35 40	35 55	35 70	35 85	23
24	36 00	36 15	36 30	36 45	36 60	36 75	36 90	37 05	37 20	37 35	24
25	37 50	37 65	37 80	37 95	38 10	38 25	38 40	38 55	38 70	38 85	25
26	39 00	39 15	39 30	39 45	39 60	39 75	39 90	40 05	40 20	40 35	26
27	40 50	40 65	40 80	40 95	41 10	41 25	41 40	41 55	41 70	41 85	27
28	42 00	42 15	42 30	42 45	42 60	42 75	42 90	43 05	43 20	43 35	28
29	43 50	43 65	43 80	43 95	44 10	44 25	44 40	44 55	44 70	44 85	29
30	45 00	45 15	45 30	45 45	45 60	45 75	45 90	46 05	46 20	46 35	30
31	46 50	46 65	46 80	46 95	47 10	47 25	47 40	47 55	47 70	47 85	31
32	48 00	48 15	48 30	48 45	48 60	48 75	48 90	49 05	49 20	49 35	32
33	49 50	49 65	49 80	49 95	50 10	50 25	50 40	50 55	50 70	50 85	33
34	51 00	51 15	51 30	51 45	51 60	51 75	51 90	52 05	52 20	52 35	34
35	52 50	52 65	52 80	52 95	53 10	53 25	53 40	53 55	53 70	53 85	35
36	54 00	54 15	54 30	54 45	54 60	54 75	54 90	55 05	55 20	55 35	36
37	55 50	55 65	55 80	55 95	56 10	56 25	56 40	56 55	56 70	56 85	37
38	57 00	57 15	57 30	57 45	57 60	57 75	57 90	58 05	58 20	58 35	38
39	58 50	58 65	58 80	58 95	59 10	59 25	59 40	59 55	59 70	59 85	39
40	60 00	60 15	60 30	60 45	60 60	60 75	60 90	61 05	61 20	61 35	40
41	61 50	61 65	61 80	61 95	62 10	62 25	62 40	62 55	62 70	62 85	41
42	63 00	63 15	63 30	63 45	63 60	63 75	63 90	64 05	64 20	64 35	42
43	64 50	64 65	64 80	64 95	65 10	65 25	65 40	65 55	65 70	65 85	43
44	66 00	66 15	66 30	66 45	66 60	66 75	66 90	67 05	67 20	67 35	44
45	67 50	67 65	67 80	67 95	68 10	68 25	68 40	68 55	68 70	68 85	45
46	69 00	69 15	69 30	69 45	69 60	69 75	69 90	70 05	70 20	70 35	46
47	70 50	70 65	70 80	70 95	71 10	71 25	71 40	71 55	71 70	71 85	47
48	72 00	72 15	72 30	72 45	72 60	72 75	72 90	73 05	73 20	73 35	48
49	73 50	73 65	73 80	73 95	74 10	74 25	74 40	74 55	74 70	74 85	49
50	75 00	75 15	75 30	75 45	75 60	75 75	75 90	76 05	76 20	76 35	50

Computed by L. Leland Locke.

585.0 5850
 570 422
 6420 6272
 570
 6790

380 sq. yds.
 9
 8) 3420
 + 225

6) 3420
 570

760
 4
 3) 3040
 101 3/3

8) 9120
 1140

6) 9120
 1520

