

78

FIELD BOOK

740

TABLE FOR REDUCING PERCHES TO FEET AND INCHES.

PERCH	FEET.	PERCH.	FEET.	PERCH.	FEET.	PERCH.	FEET.	PERCH.	FEET.	PERCH.	FEET.
1	16.6 in.	21	3.46 6 in.	41	6.76 6 in.	61	10.06 6 in.	81	13.36 6 in.		
2	33.0	22	3.63 0	42	6.93 0	62	10.23 0	82	13.53 0		
3	49.6	23	3.79 6	43	7.09 6	63	10.39 6	83	13.69 6		
4	66.0	24	3.96 0	44	7.26 0	64	10.56 0	84	13.86 0		
5	82.6	25	4.12 6	45	7.42 6	65	10.72 6	85	14.02 6		
6	99.0	26	4.29 0	46	7.59 0	66	10.89 0	86	14.19 0		
7	1.15 6	27	4.45 6	47	7.75 6	67	11.05 6	87	14.35 6		
8	1.32 0	28	4.62 0	48	7.92 0	68	11.22 0	88	14.52 0		
9	1.48 6	29	4.78 6	49	8.08 6	69	11.38 6	89	14.68 6		
10	1.65 0	30	4.95 0	50	8.25 0	70	11.55 0	90	14.85 0		
11	1.81 6	31	5.11 6	51	8.41 6	71	11.71 6	91	15.01 6		
12	1.98 0	32	5.28 0	52	8.58 0	72	11.88 0	92	15.18 0		
13	2.14 6	33	5.44 6	53	8.74 6	73	12.04 6	93	15.34 6		
14	2.31 0	34	5.61 0	54	8.91 0	74	12.21 0	94	15.51 0		
15	2.47 6	35	5.77 6	55	9.07 6	75	12.37 6	95	15.67 6		
16	2.64 0	36	5.94 0	56	9.24 0	76	12.54 0	96	15.84 0		
17	2.80 6	37	6.10 6	57	9.40 6	77	12.70 6	97	16.00 6		
18	2.97 0	38	6.27 0	58	9.57 0	78	12.87 0	98	16.17 0		
19	3.13 6	39	6.43 6	59	9.73 6	79	13.03 6	99	16.33 6		
20	3.30 0	40	6.60 0	60	9.90 0	80	13.20 0	100	16.50 0		

B. K. ELLIOTT COMPANY, PITTSBURG, PA.  
DRAWING MATERIALS AND SURVEYING INSTRUMENTS

PLEASE RETURN TO  
GEAUGA COUNTY ENGINEER  
COURT HOUSE  
CHARDON, O.  
PHONE 250-X

COUNTY HOME RD.  
CLARIDON TWP.  
GEAUGA CO  
OHIO  
C.H. #5 from C.H. #21 Northely to USS 322 115

C. SURVEYORS OFFICE  
CHARDON  
OHIO

78

TABLE FOR REDUCING PERCHES TO FEET AND INCHES. C

# INDEX

	Page
County Home Road Sec. "C" Sec.	Hub <sup>?</sup> s + REFERENCE <sup>?</sup> s 1-9
	B.M. ESTABLISHED 10-13
	Top. & $\epsilon$ + REF 14-37
	DETAIL of BRIDGE Sta 7 39
	X-SECTIONS 0-12/18 41-73
	Location of pipe 0+35 75
Slope STKs 77-101	
Chardon-Auburn Rd (G.H. #4) Part Sec. J & K	103 to 113
County Home Rd (G.H. 5, Sec. C) <sup>1948</sup> Burton Claridon	115-
Ravenwood Rd ( <sup>5/75</sup> Welfare Drive)	138

Sta

COUNTY HOUSE RD  
= NOTES + REFERENCES  
Note chained

Mch 16, 1922  
Mch 1849

18+53.7  $\Delta$  0° 17' R  
x 179-43'  
Ex-64

←  
S-50° 17' W  
cal.




→  
S-5-20° W  
MARK

→  
S-40° 23' W  
cal.

6+7990 I.P.M.  $\Delta$  0° 37' R  
AT N. END OF BRIDGE

00  $\Delta$  I.P.M.

(1)

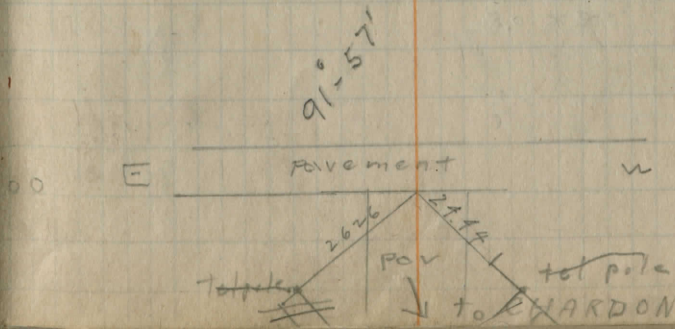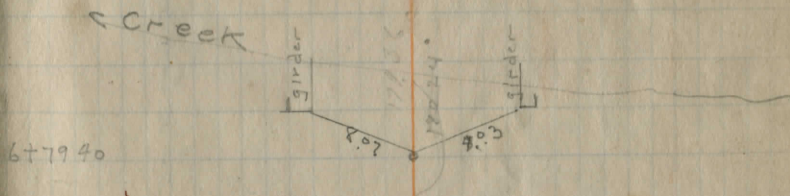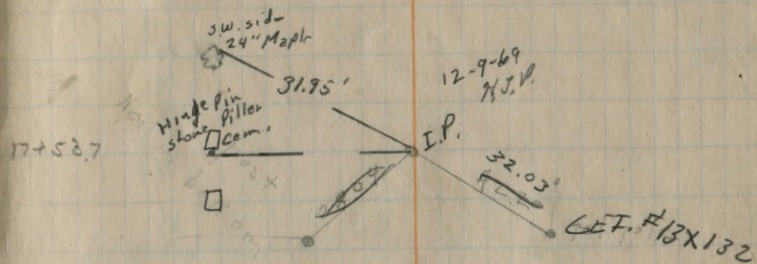

(2)

JN LACKEY  
FRED GROUH  
Mch 16 1922

COUNTY HOME RD

± HUBS & REFERENCES


37  
~~36~~+61.65 Δ 179-20- 0° 40' R  
EX 0.5

~~24~~+920 Δ 179-26 0° 34' L  
25 EX 0.5


50-23.40  
50-100  
50-100  
50-43.10  
50-43.10  
50-100  
50-100  
50-17.10

Note sta 45  
set 20' L doct of  
barn

SHOULD be 51.65  
~~(36+61.65)~~  
MAKING ~~36 to 37~~ a  
90 ft sta

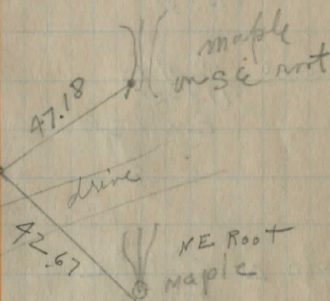

24+920



(A)

Snow

McH16

71  
70+87-8

try again acct of  
being around by  
30 55-30  
176+04-30 E x 2 1/2 x 2 1/2

68+0 3°-18' L  
176°-42' Ex 2 1/2 APPX

64  
63+30 4°-23' R  
175°-37'

62  
61+52 10°-9' L  
178°-51' Ex 1 1/2 ft

57  
56+70 2°-17' L  
177°-43'

55+33.77 PT-

55  
54+17.1 A 1°-10' R  
178°-50' 6" x

53+0.44 PC


0' 20 Curve  
R = 17.188  
Ex = 36 T = 172

1' Curve  
R = 5729.65  
Ex = 1.14  
T = 114.19

D = 30'  
L = 230.33  
T = 116.66  
R = 11459.9  
Ex = 42

53-07W ✓  
53°-17' W 9:30 W + 54°-12' W  
5-4°-16' W  
5-6°-33' W  
5-5°-23' W

(5)

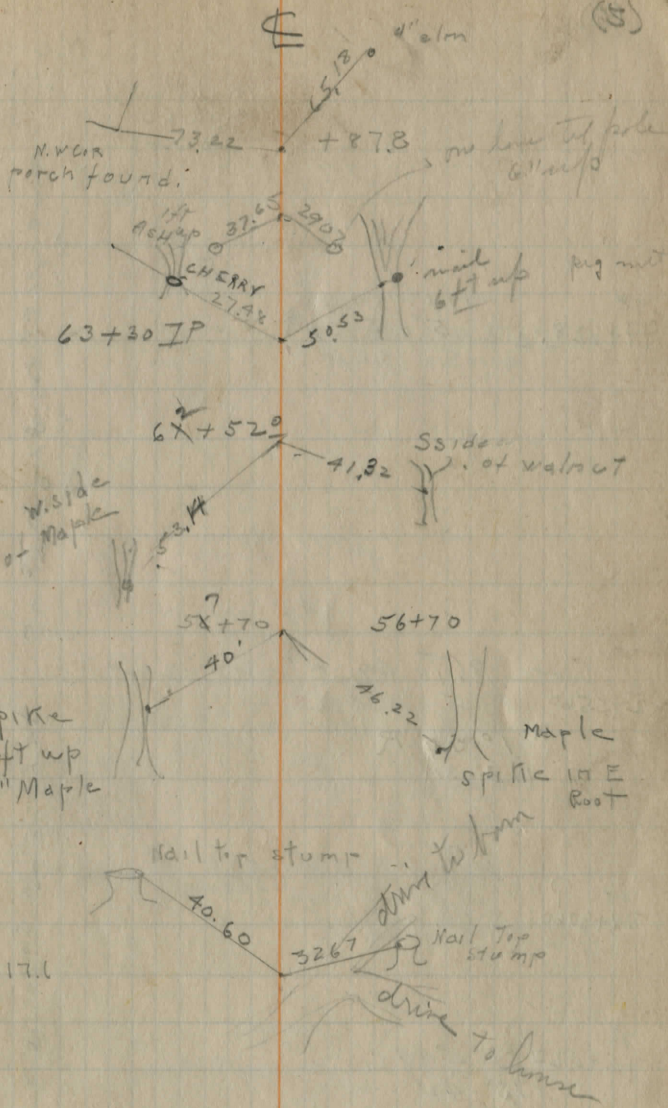

(6)

McH 16/1922  
 JHL  
 FRET  
 GROUPE  
 Angles turned  
 with 20  
 drum

98  
 97+62.85 Δ  
 174°-54-30  
 5°-5-30 R  
 Appx Ex 37.4 ft

83  
 82+55.60  
 Note 86 to 92 stake 20 ft  
 acct hedge  
 1°-29 R  
 178°-31

78  
 77+87.60 Δ-00. wiggled in  
 with 79 set 25 ft R

76  
 75+42.55 Δ  
 175°-42 L  
 Appx 2-3 ft ex

S-5°-2-18' W x 51.0-24' W  
 S-5°-2-18' W  
 S-3°-49' W  
 S-8°-7' W

cal




cal

cal

cal

cal

(7)

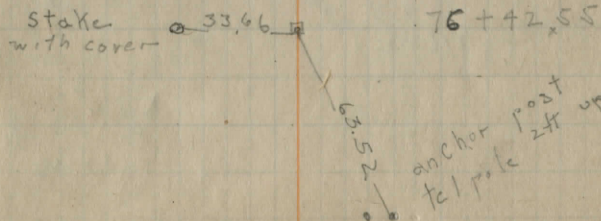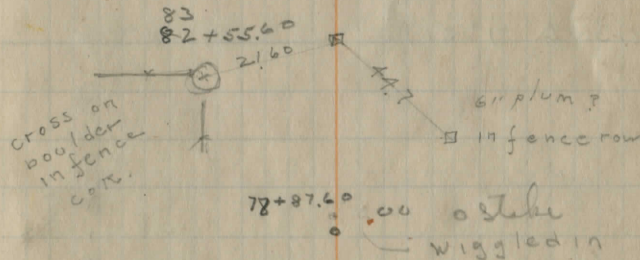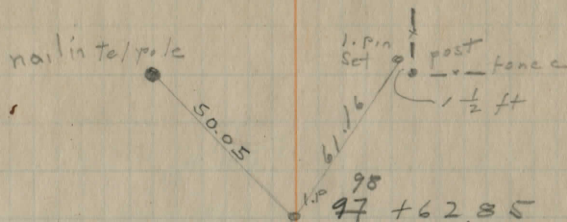

(8)

Mch 16, 1922  
L turned Mch




121 + 18 Δ

1057  
1044 98230 Δ 1° 51' R

102 + 89.20 correct  
1011 8920 Δ 3° - 24' L  
E x 2 Low 100  
176 - 36

100  
M 15-08-S  
100  
M 00-00-S  
100  
M 10-24-S  
100

(9)

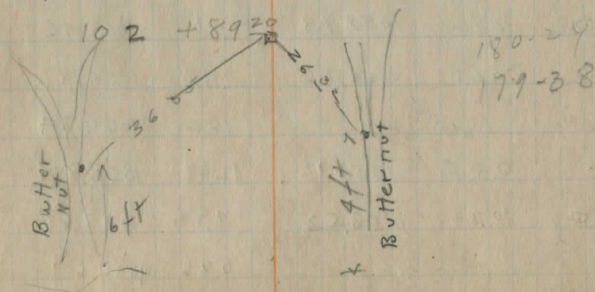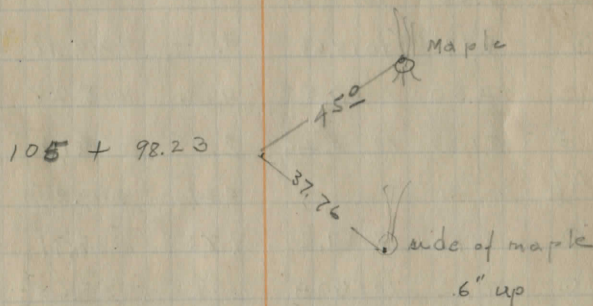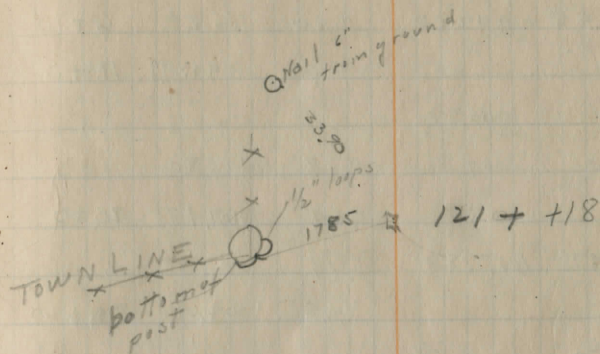















(10)

## BENCHES

	BS	HI	FS	Elev	
#1 O B.M.	1.00	1001.00		1000.00	0+0 Assumed
#2 O B.M.	0.84	989.04	12.80	988.20	
#3 O B.M.	6.36 10m r.	992.60	2.80	986.24	6+70
0	4.61	1000.58	0.63	991.97	11+0
0	8.01	1007.81	0.78	999.80	
#4 O B.M.	0.67	1007.84	0.64	1007.17	20+0
#5 O B.M.	9.50	1014.19	3.15	1004.69	25+20
0	8.49	1012.64	4.02	1010.12	
0	12.30	1030.58	0.36	1018.28	
0	5.13	1033.26	2.45	1028.13	
#6 B.M.	11.80	1037.21	0.21	1033.05	37+15
0	2.43	1038.08	7.85	1025.41	
#7 B.M.	9.94	1046.92	1.56	1035.65	
0	12.52	1058.98	2.99	1035.99	48+7
0	10.49	1068.36	1.10	1036.98	
#8 B.M.	0.05	1055.92	111	1057.87	
0	10.84	1058.53	162	1066.74	55+65
#9 B.M.	0.86	1057.67	12.49	1055.87	
0	0.56	1047.09	0.23	1047.69	
0			0.86	1057.67	63+0
0			12.00	1046.53	

 Mch 17 1922  
 JH LACKEY  
 FRED GROGAN

(11)

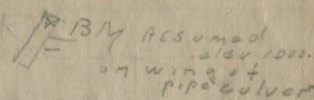on E. end of W. Abut. Bridge  
 Top of stone post. N. side of  
 abut. to cent. lane  
 found on curb of walk to house  
 Spike on NE. Root of Maple  
 R. Side of Road and  
 100 ft SE. of House  
 ON. Root of MAPLE 100 ft SE.  
 app. house  
 stone  
 B.M. S.E. corner mid/east of  
 walk house to R.  
 N. end of stone water  
 trough ON W. PARAPET  
 Nail NE. root of 18" MAPLE  
 ON E. Root of pine tree in front of  
 house

(12)

104709

MCH 17, 1922

BS HI FS Elev

○ 4.63 1038.98 12.74 1034.35

○ 10.14 1048.24 0.88 1038.10

○ 8.54 1055.64 1.14 1047.10

BM 482 105082 72+10

○ 1.81 1044.73 12.72 104292

OBM 11.58 1043.21 1300 1031.73 74+25

○ 10.22 1052.70 0.83 1042.98

○ 10.96 1057.92 5.74 1046.96

○ 5.70 1062.84 0.78 1057.14

○ 12.80 1070.20 5.44 1057.10

BM 373 1066.47 91+10

○ 6.87 1076.49 0.58 1069.62

○ 12.32 1089.04 0.27 1076.22

○ 2.29 1091.09 0.24 1088.80

○ 0.97 1079.31 12.75 1078.34

BM 1065 1068.66 101+35

○ 11.02 1082.42 7.91 1071.40

○ 4.88 1087.30 0.00 1082.42 107+15

○ P.M. 1.85 1089.06 .09 1087.21

○ 2.26 1089.80 1.52 1087.64

○ 6.79 1095.51 1.08 1088.72

○ 5.97 1097.13 4.35 1091.16

P.M. 0.95 1096.18 118+18

(13)

N.W. COR OF PATCH FLOOR  
OUT SIDE of railing  $\rightarrow$  1005 e 71+10  
10 leftN.E. COR OF E PARAPET  
OF BX COLVERT 74+25ON E. Side of MAPLE  
ON N. Side COUNTY HOUSE LANE  
E Side RdN.E. COR of E Parapet  
of stone COLVERT 100+35Tip of 2 Maple Stump  
in stone wall on RTip of Staple of N. Stone  
hitching post of yellow house

(14)

# Topog'y

## Alignment Notes. = pg 1-9

10

9

8

7

note in market no other ahead.

PI +79.90 Δ 37' R

6

5

4


3

2

1

IPOT  
O.O S. edge  
ENW pavement

### = Mayfield Rd.



(15)



10+60

10+0

9+30

8+15

7+85

tel

150

190

CREEK

TRUCKS

0 10+25 light

0 9+21 tel

0 9+15 light

0 tel pole

0 light 7+85

Prop. line?

0 6+67

0 6+67 light

L

25 ft

0 5+0 tel

4+55

max/min  
4+90

0 23

0 2+45 light

0 2+25 light

0 5. tel

0 light 2+05

250

250

0 1+15

0 1+45

0 1+65

0 1+30

18

16

light

0 tel pole 0+85

Ben Harder

High Board

stakes seen on offset line

1+02  
pole

where pole was

00

NO. 117  
24.50



(16)

21

20

19

18

$18+53.7$  correct  
 P.Z. INT.  $\approx 1792.43'$   
 $+53.7$   $\Delta$  No CURVE  
 PIT R

17

16

15

14

13


12

11

161  
21+70

(17)

2x2 Pole w/ret  
 concrete  
 2x2 Pole w/ret  
 concrete



W+M Spencer  
 111 R

110

19+6


prop

13+20

25 Tot 16+5

19+ 18+12

Newberry



Ed / post

tel 15+5

14+10 = 13m

65

15 ft

light line

c 16

12 o 13+30 tot

o 12+64 light+

o 11+50

o 11+27

old fence line  
 $11+20$   
 lane to  
 cen  
 $10+98$

off. 507 line



2+45

60

177.50  
175  
172.50

75 ft  
55 ft

15" V.P.R.

1500

(18)

32

31

30

29

28

27

26

25



$\left[ \begin{array}{l} \text{COR.} \\ 25+92 \end{array} \right] \text{INT } 179^{\circ} 26'$   
 $+92.0^{\circ} \Delta 0^{\circ} 34' L$

24

23

22

(19)




30+40.20  
outlet under  
pile of boulders  
solid rock in road  
no opening in  
upper side

Rock  
30+40  
should be ditch

25 ft off set 117 d

00 28+0

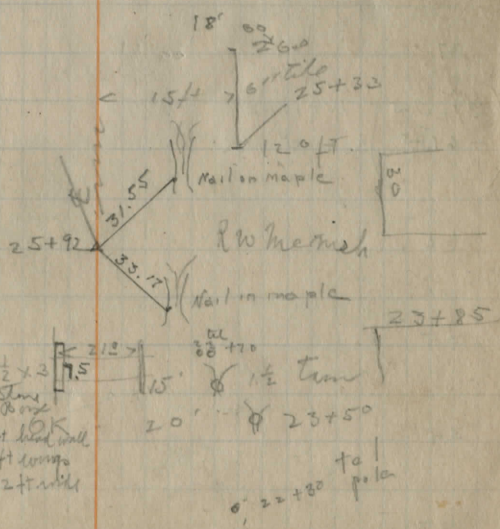

prop. line  
24+85

23+95



(22)

$55+17 \downarrow$  correct  
 INT = 178.50  
 $+17 \downarrow \Delta 12.10 R$

54+044 PC

54

53

52

51

50

49

48

47

46

45

44

$P = 0^{\circ} - 30'$   
 $L = 288.83$   
 $T = 116.66$   
 $R = 11459.9$   
 EX. 16

(23)


54+70  
18" M

18" L  
+66

Johnson 53+8



18" M

300 YET

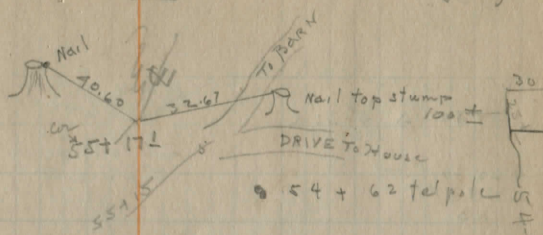

52+42 Johnson  
BOUYER

51+35

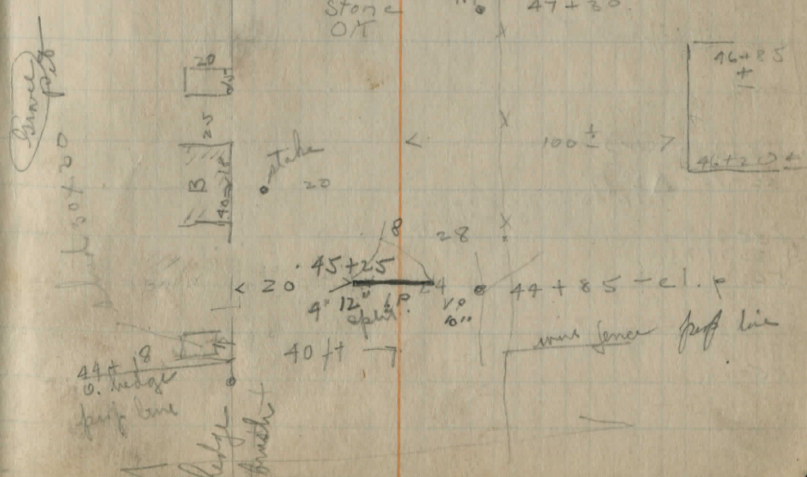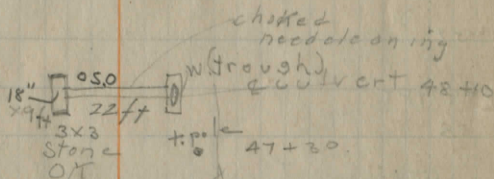

$46+85$   
 $\pm$   
 $46+20 \pm$



(26)

75

74  
+99.18 PC

73

72

71

OR 71+878  
+878  $\Delta$  3°-55'-20" R  
176-04-30

10 CURVE  
5729.65  
EX=344  
L=393.33  
T=19676

+238 P.T.

69

OK not changed  
68  $\Delta$  3°-18' L  
176-42 INT

D=10-20  
T=123.80  
L=247.50  
EX=176  
R=1297.28

67

+76.20


66

+394.2 PT


65

64

(27)

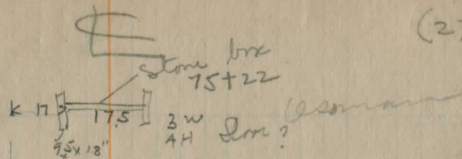


54 Acres



Halonska

N.W. COR. PORCH FOUND.

15 • 73+40  
angle in tel Curve

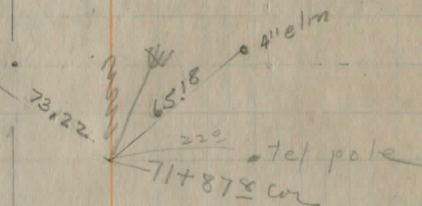


69+90 poles

fill  
85A  
3

Halonska

ditch should be cleaned out

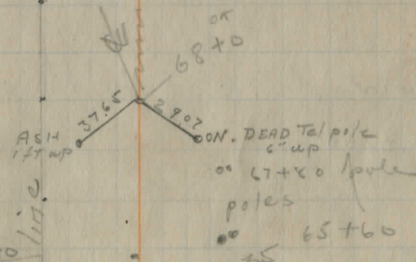

67+40 poles

65+60

22° 65+35

4' wide OK  
5' 10"  
choked fall  
4' deep

W. CHERRY  
25' • 23'

(28)

84

83

(83 + correct  
+ 55.60  $\Delta$  1° 29' R  
178.31)

D = 0-30'  
R = 11459.2  
T = 148.28  
L = 296.66  
EX = 99

82

81

80  
79+95 culvert

79

78

(78+87.60 in)  
+ 87.60  $\Delta$  0-00

77  
+ 85.85 PT


76

(76 + 42.55 in  
75+42.55  $\Delta$  4° 18' L  
175° - 42'

D = 10-30'  
R = 3819.83  
T = 143.36  
L = 286.66  
EX = 2.67

(29)

C.H.

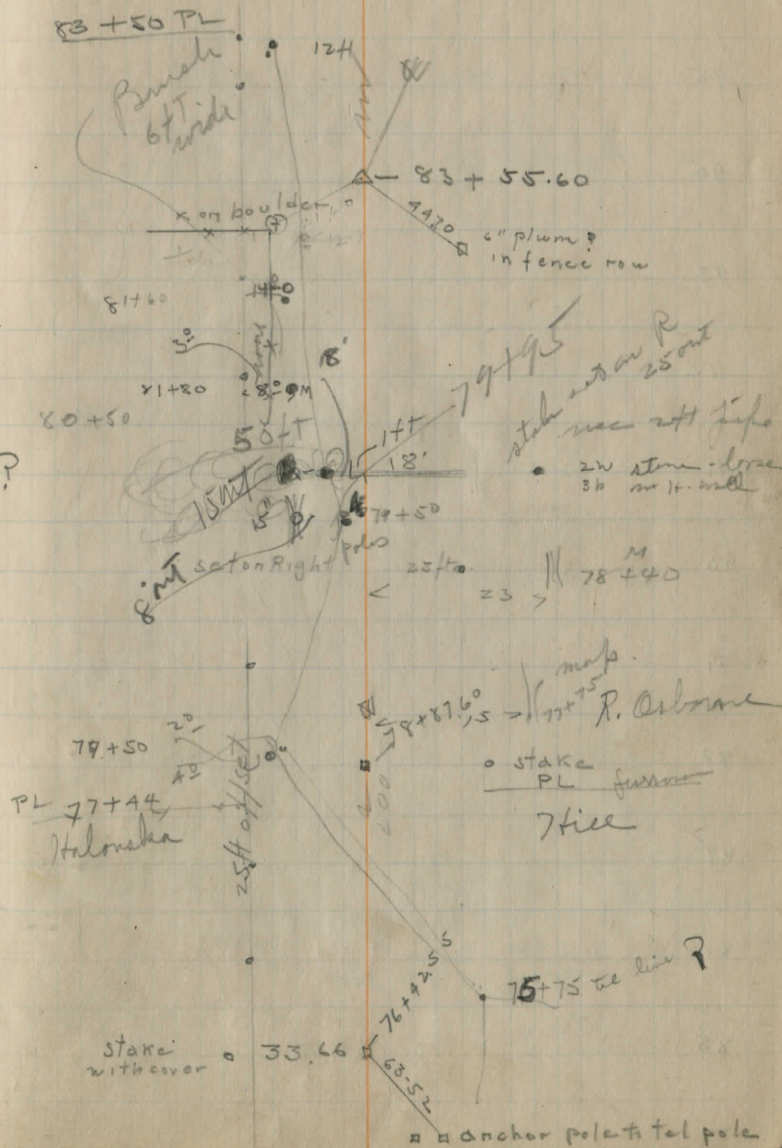



(32)

105

(105+98.23 correct  
+98.23 Δ 10.51 R  
INT 178-09

Δ = 10-51  
D = 0°-40'  
R = 8595.0  
T = 138.0  
Ex x 86  
L = 277.50

104

103

102

(102+89.20 INT 176-24  
+89.20 Δ 3-24 L

Δ = 3-24  
D = 10  
R = 5729.65  
T = 170.06  
L = 340.00  
Ex = 2.29

101

100


99

98

(98+62.85 INT 174-54-30  
+62.85 Δ 5-5-30 R  
INT 5-6

D = 1-40  
R = 3438.0  
T = 153.12  
L = 306.00  
Ex 3.44.00

97




105+25



105+40  
100

Brownville



103+38

poles

102+36.12  
12" B.N

PL 101+4

Nail in  
butternut

CH

102+89.20 5' high  
3' wide

Nail in  
butternut


PL CH

99+6

Nail in tel  
pole

25' offset

98+62.85



(34)

117

116

115

114

113

112

111

110



109

108

107


106

(35)




115+3  
Pig nut

50




2x2 old  
Buld. culvert  
3/4  
24" pipe



over to line

offset



106+90

(36)

+ 180

121


120

Sta + → P

119

118


(37)

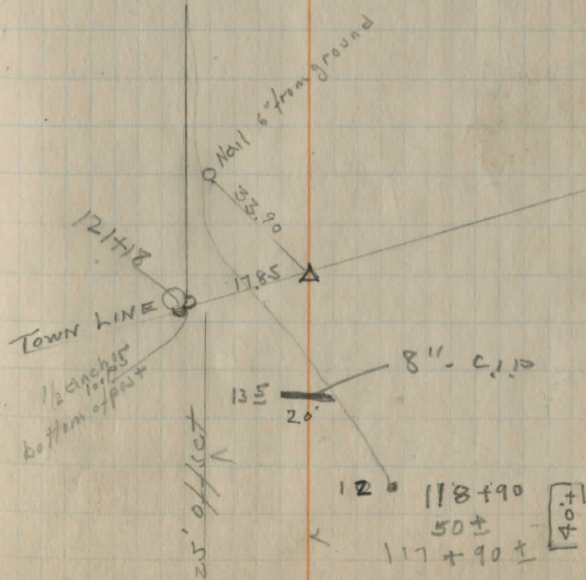

(38)

f

(39)

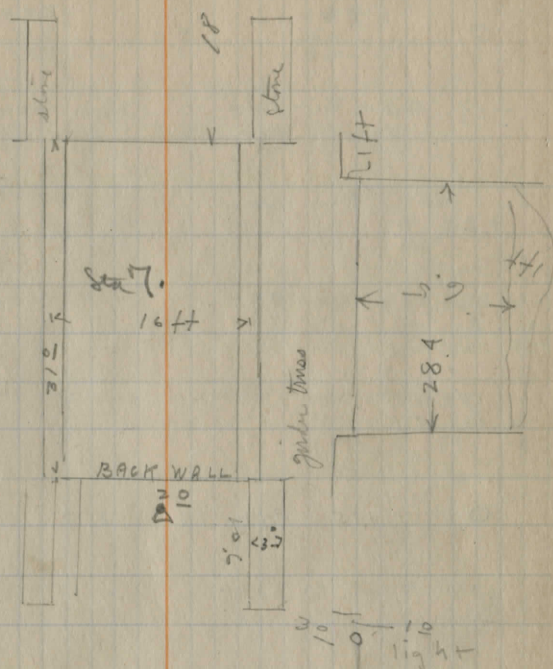

2/10



(42)

## X-SECTIONS

STA	T.B.S.	N.I	FS	ELEV	Prot. Elev
N end 6+82		990.45		4.4	986.1
7 on bridge				4.3	986.2
7+138 End				4.0	986.5
8				3.3	987.2
9				17	989.8
10					
10.31	999.08	168		988.77	
11				8.4	990.7
12				6.5	992.6
13				3.7	995.4
14				1.6	997.5
15	8.57	1007.46	0.09	998.99	7.4
16				6.6	1000.9

(43.)

E



W

ON TANK

-6.0 -2.2 +0.2	+0.2 -7.4 -8.0
10.4 6.9 4.2 4.4	4.2 11.8 12.4
17 7 10 0	11 15
-6.5 -1.9 -0.1	-0.1 -5.9 -1.4
10.8 9.2 4.4 1.3	4.4 10.2 8.7
17 12 10 0	10 11 15
-0.5 -2.8 -0.3	-0.7 -1.5 -2.7 +0.4 +0.5
4.5 6.8 4.3 4.0	4.7 5.5 6.7 3.6 2.5
2.5-2.1 17-12 8 0	10 13 15+17 19 2.5
+0.9 -0.3 -1.0 -0.1	-0.7 -1.5 -0.2 +0.7
2.4 3.6 4.2 2.4 3.3	4.0 4.8 3.5 2.6
2.5 12 11 6 0	8 10-13 15 20-2.5
0 0 -1.1 -0.5	-0.7 -1.7 -0.3 +0.3
1.7 1.7 2.8 2.2 1.7	2.4 3.4 2.0 1.4
2.5 1.4 1.3 9 0	9 10-11 13 2.5
-0.4 0 -0.6	0.0 8 -1.8 -0.4 -0.1
8.8 8.4 9.0 8.4	9.2 10.2 8.8 8.5
2.5 12 11 0	8 10-11 14 2.5
+1.7 +0.1 -1.2 -0.5	-0.5 -1.5 +2.5 +3.2
5.1 6.4 7.5 7.0 6.5	7.0 8.0 4.0 3.3
2.5 1.5 12-13 9 0	8 10-11 16 2.5
+0.2 -0.4 -1.7 -0.6	-0.6 -1.7 +0.1 +1.8
3.5 4.1 5.4 4.3 3.7	4.3 5.4 3.6 1.9
2.5 1.6 1.3 1.0 0	8 10-12 1.5 2.5
-0.4 -1.2 -0.2	+0.2 +1.1 +1.6
3.0 2.8 1.8 1.6	1.4 0.5 0.0
2.5 1.9 1.1 0	8 10 2.5
-1.5 -1.0 -1.4 -0.4	-0.4 -1.0 -0.7 -0.3
8.9 8.4 8.8 7.8 7.4	7.8 8.4 8.1 7.7
2.5 1.5 1.3 1.0 0	8 10-12 1.4 2.5
-1.0 -0.4 -1.4 -1.2	-0.4 -1.2 -0.3 -1.2 +1.2
7.6 7.0 8.0 7.8 6.6	7.0 7.8 7.3 6.8 5.4
2.5 1.2 1.0 8 0	8 11 12 2.1 2.5



(46)

## X-SECTIONS

STA	BS	H/I	F.S.	Elev	PROFILE
		1010.99			
B <sub>3</sub> M #5			543 <del>120</del>	1004.66 1004.69	-0.2
25				6.4	1003.7
26				29	1007.2
27				2.3	1007.8
①			2.62	1007.97	
			End of	Set 20 P. M.	Mo H 25
			W. Od 29 Lackey Graw R. Sperry 28	8.67	1016.14
				5.5	1010.6
+ 50				4.3	1011.8
29				4.6	1011.5
30	+			5.8	1010.3
+ 35				6.5	1009.6
31				5.7	1010.4
①				6.95	1018.24
			4.85		1011.29

(47)

E ON TANG W

+0.1	-0.8	-1.5	-0.8	-0.4	-1.0	-0.1	+0.9
63	72	79	72	64	6.8	7.4	6.5
25	17	14-11	9	0	11	13	19
1.8	-1.7	-1.9	-0.9	-0.3	+1.4	-0.1	+1.0
4.744	4.838	29	29	3.2	3	3.0	1.9
2.5	1.6	1.5-1.3	1.2	0	1.2	1.3-1.5	1.8
-1.0	-0.6	-1.6	-0.5	-0.5	-1.0	-0.3	+1.3
3.3	2.9	3.9	2.8	2.3	2.8	3.3	2.6
2.5	1.6	1.5	1.1	0.7	2.9	1.0-1.2	1.3
							1.9
							2.5

Top of affix stake for sta 27. - 25 Lot 11.2

-0.8	-0.4	-1.4	-0.8	-0.4	-1.0	+2.9	+3.8
63	5.9	6.9	8.3	5.5	5.9	6.5	2.6
25	1.6	4-1.3	1.1	0	1.1	1.3	2.0

-0.6	-0.6	-1.0	-0.4	0	-0.5	+2.1	+3.6
4.9	4.9	5.3	4.7	4.3	4.3	4.8	2.2
2.5	1.5	1.4	1.1	0	1.2	1.4	1.9

-2.1	-1.6	-0.8	-0.1	-1.4	+0.2	+4.4
6.7	6.2	5.4	4.6	4.7	5.2	4.4
2.5	1.4	1.8	0	1.2	1.4	1.8

-6.1	-3.2	-0.1	+0.5
12.9	10.0	5.9	5.8
2.5	1.0	0	0

-9.9	-3.9	-1.0	+0.9	+0.7
16.4	11.4	7.5	6.5	5.6
2.5	2.1	1.0	0	1.0

-3.9	-2.4	-1.0	+0.1	+0.6	+1.1
9.6	8.1	7.1	6.4	5.7	5.6
2.5	1.9	1.8	1.6	0	1.0

(48)

STA	BS	HI	FS	Elev	PROFILE
		1018.24			
32			5.2		1011.5
33			4.0		1014.2
+66	culvert		3.0		1015.2
0	10.44	1026.73	195	1016.29	
34			10.6		1016.1
35			6.8		1019.9
36			2.5		1024.2
0	8.92	1033.80	1.85	1024.88	
37			4.4		1029.4
36 B.M			0.77		1033.03
	0.24	1033.27			
38			3.9		1029.4
39			5.0		1028.3
40			7.6		1025.7
0	9.65	1033.80	8.12	1025.15	

(49)

ONTANG

-1.1	-0.7	-1.1	-0.7	-0.3	-0.8	-0.3	+2.8
6.8	6.4	7.1	6.4	5.7	6.0	6.5	6.0
2.5	1.7	1.0	7	0	1.0	1.6	1.7
-1.9	-0.5	-1.1	-0.4	-0.3	-1.1	+2.5	+3.0
5.9	4.5	5.1	4.4	4.0	4.3	5.1	1.5
2.5	1.0	9	6	0	9	1.1	1.9
-7.2	-6.5	+1.0	-0.3	-0.3	+1.0	-4.8	-1.0
10.2	9.5	2.0	3.0	3.0	3.3	2.0	7.8
2.5	1.0	1.0	8	8	12	1.4	1.4
+0.4	+0.5	-0.1	-0.8	-0.5	-0.9	0	+2.6
10.2	10.1	1.0	1.1	1.1	1.5	1.0	1.5
2.5	1.8	1.3	1.0	9	6	0	0
+1.8	+1.9	-0.2		0	-1.3	0	+3.7
5.0	4.9	7.0	6.8	6.8	7.5	6.8	3.1
2.5	1.2	9.6	0	4	7	8	1.4
-1.3	-0.7	+0.1	+0.1	+1.3	+1.5		
3.8	2.7	2.5	2.4	2.6	1.2	1.0	
2.5	9	0	5	8	12	2.5	
-0.1	-0.3	-0.7	-0.3	-0.7	+0.3	+1.1	+2.6
4.8	4.7	5.1	4.4	4.7	5.1	4.1	3.3
2.5	1	8	0	4	1.0	1.1	2.1
-0.8	-0.3	-0.8	-0.4	-0.2	+1.1	+1.4	
4.1	4.2	4.7	4.3	3.9	3.7	2.8	2.5
2.5	1.0	9	7	0	1.0	1.8	2.5
-1.1	-0.7	-0.2	-1.0	-0.4	0	+0.5	
6.4	5.7	5.0	5.2	6.0	5.7	5.4	5.0
2.5	8	0	8	9-10	1.1	1.3	2.5
-0.7	+0.1	-0.3	-0.2	-0.8	-0.3	-1.8	-2.1
4.3	7.5	7.9	1.0	7.8	9.4	7.9	5.8
2.5	9	6	0	8	10-11	1.8	1.5





(54)  
STA B.S. HI F.S. Elev PROFILE

1065.74

54 8.0 1057.4

55 3.5 1061.9

+ 15 2.7 1062.7

0 6.85 1068.12 417 → 1061.127  
B.M. #8 1.41 1066.71 -0.03

2.99 ← 1064.26

56 5.6 1058.7

57 12.6 1051.7

0 3.17 1055.00 12.43 1051.83

+ 65 Culvert 5.3 1049.7

58 5.5 1049.5

+ 55 4.7 1050.3

59 5.8 1049.2

60 10.0 1045.0

ON TANK.

55

0 0 -0.3 -0.6 -0.3 -1.0 -0.3 +1.9  
80 80 83 86 80 83 90 83 61  
25 11 9 8 0 8 11 12 25

-5.5 -0.1 -0.9 -0.3 3.5 -0.1 +0.6 +4.0  
90 39 44 38 0 36 29 +0.5  
25 15 14 9 0 25

-1.4 -0.8 -1.3 -0.7 +0.2 +2.1 +2.7 +3.5  
41 35 40 34 27 25 0.6 00 +0.8  
25 15 12 10 0 7 20 21 25

+2.0 +0.6 +0.3 -0.6 -0.2 +1.6 +2.4 +5.6  
76 62 49 62 58 56 60 22 00  
25 20 13 11 9 9 12 25

+0.8 +2.6 -1.4 -0.4 -0.2 +1.0 +6.3  
118 104 140 130 126 12.8 11.6 6.3  
25 17 10 6 0 10 14 25

115 107 83 69 5.0 cm 4.3  
37 25 13 B (-6.2 -1.2 -0.5 -0.3 Top of Cmg -2.6  
169 145 131 16 15 58 7 53 56 96 12  
41 29 24 -5.8 -3.5 -0.4 0 -0.5 -3.3 -4.1 12.2  
113 90 59 55 5.5 60 88 96 30  
25 15 9 7 11 18 25

-2.7 -3.0 -1.0 -1.6 -0.6 -0.1 -0.8 -0.7 +5.7  
70 17 5.7 6.3 5.3 4.7 4.8 5.5 4.0 +11.0  
25 21 12 10 9 6 9 12 17 25

0 +1.3 +0.4 -2.0 -0.2 0 -0.3 -0.7 +5.8  
58 4.5 5.4 7.8 6.7 5.8 6.1 6.5 0  
25 17 13 8 10 6 0 9 11 24

-6.2 -0.2 -0.1 -1.2 -2.9  
16.2 10.2 10.0 10.1 11.2 12.9  
25 5 0 10 13 25

56	BS	HI	FS	Elev	Profile
		1055.00			
+ Curb 25				10.0	1045.0
61				4.9	1050.1
0	4.07	1057.72	035		1053.65
62				4.2	1053.5
61 + 65				3.5	1054.2
62 + 70 # 9 BM				4.6	1053.1
			005		1057.67
	-001	1057.66			
63				6.0	1051.7
64					
0	1.60	1046.86	12.40		1045.26
64				5.3	1041.6
0	2.48	1036.86	12.48		1034.38
65				3.0	1033.9

E  
ON TANG

57

$-9.1$   $-7.0$   $-0.3$   $0$   $-2.6$   $3.1$   $1.8$   $-2.7$   
 $19.1$   $17.0$   $10.3$   $10.0$   $10.2$   $13.6$   $13.1$   $12.7$   
 $25$   $8$   $4$   $9$   $16$   $17$   $25$   
 $+2.7$   $+2.7$   $+0.5$   $-0.6$   $+0.1$   $-0.9$   $+1.1$   $+5.1$   
 $2.2$   $4.2$   $4.4$   $5.5$   $4.9$   $4.8$   $5.8$   $0.5$   $+0.2$   
 $25$   $18$   $16$   $8$   $0$   $8$   $12$   $21$   $25$

$-2.3$   $-1.9$   $-0.5$   $-0.9$   $-0.1$   $+0.1$   $-0.3$   $+0.2$   $+1.7$   
 $6.5$   $6.1$   $4.7$   $5.1$   $4.6$   $4.2$   $4.9$   $4.5$   $4.0$   $2.5$   
 $2.5$   $17$   $10$   $9$   $7$   $9$   $12$   $13$   $2.5$

$-1.8$   $-1.0$   $0$   $-1.1$   $-0.5$   $-0.5$   $-1.1$   $+0.2$   $+2.5$   
 $4.9$   $4.5$   $3.5$   $4.6$   $4.0$   $3.5$   $4.0$   $4.6$   $3.0$   $1.0$   
 $2.5$   $14$   $9$   $8$   $6$   $8$   $9$   $12$   $14$   $2.5$

$-1.2$   $+0.3$   $0$   $-0.4$   $+0.8$   $+1.3$   $+2.3$   $+3.0$   
 $5.4$   $4.3$   $4.6$   $4.6$   $5.0$   $3.8$   $3.3$   $2.3$   $1.6$   
 $2.5$   $16$   $12$   $8$   $7$   $10$   $15$   $18$   $2.5$

$-0.1$   $+0.2$   $-0.8$   $-0.1$   $-0.6$   $-1.1$   $+3.5$   $+4.1$   
 $6.4$   $5.8$   $6.8$   $6.4$   $6.0$   $6.6$   $7.1$   $2.5$   $1.9$   
 $2.5$   $18$   $16$   $12$   $4$   $7$   $20$   $2.5$

N.G.  
This bank  
is up-  
R.

$-5.9$   $-5.7$   
 $11.2$   $11.0$   
 $2.5$   $2.0$

$-1.1$   $-0.4$   $-0.7$   $-0.7$   $-0.3$   $0$   $+1.5$   
 $6.7$   $5.7$   $5.3$   $6.0$   $6.7$   $5.6$   $5.3$   $3.8$   
 $9$   $6$   $0$   $10$   $13$   $14$   $20$   $2.5$

$-2.4$   $-1.5$   $-1.7$   $-0.6$   $+0.2$   $-1.5$   $-5.0$   $-5.3$   
 $5.4$   $4.5$   $4.7$   $3.6$   $3.0$   $3.2$   $4.5$   $8.0$   $8.3$   
 $2.5$   $13$   $11$   $9$   $7$   $8$   $14$   $16$   $2.5$

STA	B.S	H.I.	F.S.	Elev	Profile
		1036.26			
65+35	Culvert			4.3	1032.6
66				4.9	1032.0
67				3.0	1033.9
○	12.87	1048.90	083	1036.03	
68				10.8	1038.1
69				8.2	1040.7
○	869	1055.79	180	1047.10	
70				10.6	1045.2
71				11.41	1051.7
72				3.7	1052.1
		4.98		1050.81	
BM 10					
73				9.2	1046.6

TANG 59

with dig ditch to 00  
at 100 ft out to L

← -5.9	-5.1	-2.4	-0.7	0	-2.4	-6.1	-5.0
10.2	9.4	6.7	4.5	4.3	4.3	6.7	9.3
25	9	9	6	6	11	11	25
-2.5	-1.1	-0.5		-0.6	-1.2	-0.7	-1.1
7.4	6.0	5.4	4.9	5.5	6.1	5.4	6.0
25	11-10	9		8	10	12	25
-0.6	-0.3	-1.1	-0.6	-0.2	-1.0	+1.2	+3.0 +3.6
3.6	3.3	4.4	3.6	3.0	3.2	4.0	1.8 0.0 +0.6
25	15	13	11	0	10	12	14 2.0 2.0
-2.2	-1.0	-1.7	-0.7	-1.3	-1.1	-0.2	-3.0*
13.0	11.8	12.5	11.5	10.8	11.5	11.9	10.6 7.8
25	14	12	9	0	7	9	14 2.5
-6.1	-5.2	-1.0	-0.5	-0.1	-0.8	-0.3	+2.0
2.1	3.0	4.2	8.7	8.2	8.3	9.0	7.9 6.2
25	20	7	5	6	12	14	17 2.5
+3.4	+3.4	+0.1		+0.6	-0.3	+3.3	+4.1
7.2	7.2	10.5	10.6	10.0	10.9	7.3	6.5
25	11	5		14	15	21	25
-1.1	-1.1	-0.2	-0.9	0.0	-0.3	+1.8	+2.5
5.2	5.2	4.3	5.0	4.1	5.0	2.3	1.6
25	17	7	5	14	16	20	2.5
-0.8	-0.5	-0.3		0	-0.6	+1.5	
4.5	4.5	4.0	3.7	3.7	4.3	2.2	
25	6	4		12	14	2.5	
+1.6	-0.9	-0.5		-0.4	-1.2	+2.4	+3.3 +5.1
7.6	10.1	9.7	9.2	9.6	10.4	6.8	5.9 4.1
25	14	12	10	3	6	11	19 2.5

60 STA B.S. HI FS Elev. PROFILE

ON TANG

1055.79

0 0.18 1043.14 1283 1042.96

+1.1 +1.9 -0.1 -0.3 +2.9 +4.0 +7.3  
2.9 5.4 7.4 7.3 7.6 4.4 3.3 0.0  
2.5 1.9 1.4 1.0 5 10 13 2.5

74 7.3 1065.8

B.M. 11 1135 1031.79  
1031.73

Set (Windy)

LACHER GRAU SPERR 75 787 1039.60 1031.73

-2.4 -1.9 -0.2 -0.3 -2.3  
10.1 9.6 7.9 7.7 8.0 10.0  
2.5 1.8 1.0 0 1.0 2.5

+22 Culv. 77 1031.9

-6.5 -6.0 -0.3 -0.6 -0.2 0.0 -5.7 -3.3  
+2 13.7 8.0 8.3 7.7 7.9 7.7 13.4 11.0 -5.0  
2.5 1.1 1.0 1.0 1.0 8 10 11 2.5 12.7 6.1  
2.5

76 73 1032.2

-6.1 -4.9 -0.3 0.0 -1.0 -0.2 -0.2  
13.4 12.4 7.6 7.3 7.5 8.3 7.5 7.5  
2.5 1.6 1.0 5 9 10 2.5

77 27 1036.9

+1.1 +1.1 -0.6 -1.5 -0.6 -0.5 -1.8 +0.5 +2.3  
10 10 2.3 4.2 3.3 2.7 3.2 3.5 2.2 0.4  
2.5 1.8 1.2 1.1 1.0 1 6 9 2.5

0 13.00 1051.80 0.80 1058.80

-0.8  
+3.2 +2.0 +0.9 -0.2 -0.3 -0.2 -0.6 +2.1 +5.0  
3.4 4.6 5.1 7.4 6.9 6.6 6.8 7.2 4.5 1.6  
2.5-2.0 1.7 1.1 1.0 1.0 7 9 1.1 2.5

78 66 1045.2

+0.1 +1.3 0.0 -1.2 -0.7 -0.3 -0.9 +1.7 +3.9  
2.0 0.8 2.1 3.3 2.8 2.1 2.4 3.0 0.4 +1.8  
2.5 1.3 1.0 1.0 1.0 8 11 1.3 2.5

79 21 1049.7

0 65.0 1053.47 483 1046.97

-18.5 -14.2 -9.2 5.7 -3.5 -0.2 -0.1 0.0 -4.8 -3.7  
2.5 2.0 1.5 1.2 1.0 0.6 7 6.6 6.5 1.3 10.2  
4.5 3.8 2.5 1.5 1.2 1.2 1.3 1.5 1.8 2.5  
8.8

+95 Culv. 65 1047.0

STA B.S. HI FS. Elev Profile

1053.47

80 6.0 1047.5

81 3.8 1049.7

○ 11.49 1064.45 0.51 1052.96

82 7.8 1056.6

83 1.9 1059.5

84 4.8 1059.6

85 8.3 1056.1

+40th 8.5 1055.9

○ 4.67 1061.28 7.84 1056.61

86 5.0 1056.3

87 3.1 1058.2

88 2.2 1059.1

○ 11.38 1069.92 2.74 1058.54

ONTANG

-9.0 -6.0 -0.8 -0.8 -3.1 -3.2

15.0 12.0 6.8 6.0 6.8 9.1 9.2  
2.5 17 4 6 14 17 2.5

-2.2 -0.7 -0.7 -1.3 -0.4 -0.5 -1.2 -0.4 -0.6 +0.2

6.0 7.5 4.5 5.1 4.2 3.8 4.3 5.0 4.2 4.4 3.6  
2.5 17 8 6 4 10 -12 13 18 2.5

+1.2 +0.3 -1.0 -0.3

-0.4 -0.8 +0.8 +2.3

6.6 7.5 8.8 3.1 7.8 8.7 2.6 7.0 4.5  
2.5 1.5 8 7 5 8 11 14-16 2.5

-1.8 -0.2 -0.8 -0.4

-0.4 -1.1 -0.1 -1.2 -1.2

6.7 5.1 5.1 5.3 4.1 5.3 6.0 5.0 3.7 3.7  
2.5 9 8 5 6 8 10 11-16 2.5

-0.3 -0.6 -1.6 -0.4

-0.2 -0.9 -1.4 -2.0

5.1 5.4 6.4 5.2 4.8 5.0 5.7 3.7 2.8  
2.5 2.0 11 10 6 5 8 10 2.5

+0.7 +0.1 -1.2 -0.3

-0.2 -0.8 +0.5 +0.1 +0.8 +1.3

7.6 8.2 9.5 8.6 8.3 8.5 9.1 7.8 8.2 7.5 6.0  
2.5 -1.7 11 10 6 5 8 12 16 19 2.5

-2.0 -1.0 -2.6 -0.3

-0.7 -0.7 -2.7 -1.1

10.5 9.5 11.1 13.8 8.5 8.7 9.2 11.2 9.6  
2.5 1.4 12 7 5 6 11 12 2.5

1.5  
ditch

-2.5 -1.8 -0.6 -1.5 -0.4

-0.3 -1.0 -0.3 +0.1

7.5 6.8 5.6 6.5 5.1 5.0 5.3 6.0 5.3 4.9  
2.5 17 11 10 9 5 9 10 2.5

-2.7 -1.4 -0.9 -2.2 -1.3

-0.8 -1.8 -0.5 +0.5

5.8 1.5 4.0 5.3 4.4 3.1 3.9 4.9 3.6 2.6  
2.5 2.0 1.3 1.1 8 5 18 11 2.5

-0.4 -0.6 -1.6 -0.8

-0.3 -1.1 +0.5 +3.2

2.6 2.8 3.8 3.0 2.2 2.5 3.2 1.7 +1.0  
2.5 1.4 1.3 1.0 0 5 8 10 2.5

STA	B.S.	I/I	FS	Elev	Profile
+ 77	v. Pipe	1069.92		98	1060.1
89				96	1060.3
90				75	1062.4
91				33	1066.6
BM # 12			344	1066.48	on a post with a 6" diameter screw
92	9.65	1079.28	0.29	1069.63	
93				10.0	1069.3
+ 50				7.7	1071.6
94				6.8	1072.5
+ 65	Pipe			7.5	1071.8
95				6.9	1072.4
				6.5	1072.8

		ON TANG			
-2.8	-34	-0.6	-1.1	-2.4	-0.2
132	132	109	98	104	122
25	10	8	9	10	25
-2.4	-0.7	-1.5	-0.5	-0.3	-1.1
120	103	111	101	96	99
25	12	11	8	6	8
-1.3	-0.6	-1.4	-0.3	-0.5	+0.9
88	81	89	78	75	80
25	13	12	8	6	7
+0.1	+0.1	-0.8	-1.5	-0.7	+0.3
32	32	41	48	40	33
25	20	13	12	9	39
-0.3	-0.4	-1.1	-0.6	-0.6	-1.3
103	104	111	106	100	106
25	13	12	10	7	10
-0.3	-0.8	-1.6	-0.6	-0.9	-1.3
80	85	93	83	77	86
25	14	13	8	7	10
-0.4	-0.5	-1.8	-0.8	-0.5	-0.9
72	73	86	76	68	73
25	15	13	9	5	77
-0.1	-0.5	-1.2	-0.4	-0.2	-0.5
76	80	87	79	75	77
25	14	12	9	5	8
-4.9	-4.0	-1.0	-0.5	-0.4	-3.1
118	109	74	69	73	100
25	12	8	4	4	8
-2.5	-0.5	-0.4	-0.7	0	+0.5
90	70	69	65	72	65
25	12	4	0	7	8

B.S. 7-I F S Elev Profile

STA 10 1079.28

96 3.7 1075.6

10.43 1088.50 1.21 1078.07

97 5.0 1083.5

98 0.5 1088.0

0 4.38 1091.83 1.05 1087.45

+50 1.8 1090.0

99 3.3 1088.5

100 10.0 1081.8

0 1.06 1080.43 12.26 1079.37

101 8.4 1072.0

+37 10.2 1070.2

ON TANG

-0.3 -0.9 -0.6 -0.9 -0.5 -0.5 -1.1 -0.2 +0.8

40 46 43 46 42 37 42 48 39 29  
25 18 12 10 8 5 7 8 25

-2.6 -1.0 -0.9 -0.3 +0.3 -1.1

76 60 54 50 53 47 39  
25 9 6 0 9 11 25

-3.3 -1.8 -0.8 -1.3 -0.6

38 23 13 1.8 11 0.8 0.8 0.0 +1.5  
25 19 9 8 5 0 17 12 25

-3.9 -1.9 -0.4 -0.8

59 37 22 26 18 +0.2 -0.5 +0.6 +1.8  
25 18 11 6 0 6 12 14 22

-0.7 +0.5 +0.2 -0.8 -0.4 -0.3 -0.5 +0.9 +2.7

40 28 21 41 31 33 36 38 24 06  
25 16 9 7 5 0 9 11 13 25

+2.3 -0.1 -1.5 -0.4 -0.6 -1.1 +0.8 +3.9

71 99 115 106 100 106 111 92 61  
25 9 7 4 8 10 12 25

+1.7 -0.1 -1.6 -0.4 -0.3 -1.0 -0.2 -0.5

6.7 8.5 9.6 8.8 8.4 8.7 9.4 8.6 8.9  
25 12 10 6 7 11 12 25

220 105 215 200

25 10.2 10.8 11.6 20.2 18.2 17.2  
15 10 13 7 14 14 25 50

-9.8 -10.3 -1.6 -1.0

25

STA	B.S.	HI	FS	Elev	Profile
102		1080.43		116	1068.8
⊙ BM	10.19	1078.85	1177	1068.66	0-0
103				7.8	1071.1
104				2.2	1076.7
⊙	10.03	1088.44	049	1078.41	
105				6.6	1081.8
106				5.0	1083.4
BM			1.22	1087.22	
107				6.6	1081.8
+60 Pipe				6.8	1081.6
108				7.0	1081.4
⊙	4.50	1086.97	5.97	1082.47	

ONTANG

-4.7	-0.2	-0.9	-2.4	-1.4	-2.4
16.0	11.8	11.6	12.0	14.0	13.0
2.5	12		3	13	17
					25
-0.8	-1.0	-1.8	-0.8	-0.2	+4.5
8.6	8.8	9.5	8.6	7.8	8.0
2.5	1.6	1.5	1.0		1.0
					2.5
-0.1	+0.2	-1.5	-0.8	-0.4	-0.8
2.3	2.0	3.7	3.0	2.2	2.6
2.5	2.0	1.5	1.1	0	6
					1.6
					1.4
					2.5
					+3.5
					+5.7
-0.7	-0.1	-1.4	-0.8	-0.3	-1.1
7.3	6.7	8.9	7.4	6.6	6.9
2.5	1.5	1.1	1		8
					1.4
					2.0
					2.5
-0.9	-0.3			+0.5	+1.7
5.9	5.3	5.0		4.5	3.3
2.5	1.8			1.1	1.9
					2.5
-1.4	0.0	-1.3	-0.8	0.0	-0.8
8.8	7.4	7.9	7.4	6.6	6.6
2.5	9	8	7	6	7
					11
					16
					2.0
					2.5
-2.4	-2.2	-1.05		0	-1.6
9.2	9.0	7.3	6.8	6.8	8.4
2.5	1.0	1.6		1.2	1.3
					1.6
					1.8
					2.5
-1.1	-0.7	-0.6	-1.1	-0.5	-0.2
8.8	7.7	7.4	8.1	7.5	7.0
2.5	2.0	1.1	1.1	1.0	1.1
					1.2
					8.0
					7.5
					5.8
					2.5

70	BS	HI	FS	Elev	Profile
STA		1086.97			
109				5.3	1081.7
110				4.4	1082.6
111				5.0	1082.0
+ 60				4.8	1082.2
112				4.2	1082.8
⊙	10.39	1096.37	0.99		1085.98
113				10.6	1085.8
114				5.1	1091.3
+ 50				3.2	1093.2
115				4.2	1092.2
116				5.8	1090.6
+ 35	Repe			5.8	1090.6
⊙	9.90	1098.94	7.33		1088.04

E  
ON TANG

-2.4	-1.4	-1.1	-0.6	-0.3	-0.9	-0.4	+1.6
7.7	6.7	6.4	5.9	5.3	5.6	6.2	5.7
25	18	8	6	8	12	13	25
-1.6	-0.6	-1.0	-1.6	-0.3	-0.7	-1.3	+1.1
6.0	5.0	5.7	6.0	4.7	5.1	5.1	3.2
25	13	9	8	6	10	12	18
-1.5	-0.6	-1.3	-0.6	-0.4	-1.3	-2.2	
6.5	5.6	6.3	5.6	5.0	5.4	6.3	2.8
25	16	12	6	5	8	12	21-25
-6.2	-6.2	-1.2		-0.4	-5.5	-5.0	
3.0	1.0	6.0	4.8	5.2	10.3	9.8	
25	11	7	8	8	11	25	
+2.2	-1.2	-1.5	-0.5	-0.5	-1.5	-1.1	-0.3
6.4	5.4	5.7	4.7	4.2	4.7	5.7	5.3
25	10	8-6	4	5	7	9-11	12
+1.3	-0.4	-1.1	-0.5	-0.2	-0.9	-3.1	+3.1
11.3	11.0	11.7	11.1	10.6	10.8	9.7	7.5
25	11	10	7	8	11	14	25
-0.1	+0.8	-0.7	-1.3	-0.4	-0.1	-1.0	-0.1
5.2	4.3	5.8	6.4	5.5	5.2	6.1	5.1
25	14	12	9	6	6	9	11
-1.4	-0.5	-1.5	-0.8	-0.4	-0.9	0.0	+1.8
4.6	3.7	4.7	4.0	3.2	3.6	4.1	3.2
25	13	11-9	6	5	6	9	11
-2.4	-0.7	-1.3	-0.3	-0.3	-0.7	0.0	+1.6
6.6	4.9	5.5	4.5	4.2	4.5	4.9	4.2
25	10	8	6	5	6	8	10
-2.9	-1.7	-1.5		-0.3	-0.9	-0.2	+2.0
8.7	7.5	6.3	5.8	6.1	6.7	6.0	3.8
25	10	7	8	7	10	12	25
-5.5	-4.2	-3.1	-0.6	-0.6	0.1	6.2	-0.4
11.3	10.0	9.5	6.4	5.8	6.4	8.1	6.2
25	18	16.0	8	8	9	10	25

72

STA POS HI FS Elev Profile

1098.94

117

8.0 1090.9

118

6.0 1092.9

BM  
# 15

2.80

1095.14

± 15  
118+18

119

6.6 1092.3

+ ?

Pipes

7.2 1091.7

120

7.0 1091.9

121

4.9 1094.0

+ 18

4.7 1094.2

73

ON TANG

-0.3 -0.2 -0.6

8.3 8.2 8.6 8.0  
25 7 6

-0.3 -0.4 -1.0 +1.4 +1.6

8.3 8.4 9.0 6.6 6.4  
7 12 13 18 25

-0.8 0.0 -0.7

6.8 6.0 6.7 6.0  
25 18 11 6

+0.3 +1.5

5.7 4.5  
12 25

-0.4 -0.1 -0.9 -0.4

7.0 6.7 7.5 7.0 6.6  
25 11 10 8 6

-0.6 0.0 +1.7

7.7 6.6 4.9  
9 10 25-4.1 -2.3  
+1 -0.611.3 9.5 7.8 7.2  
25 12 11 0

-0.1 -1.8 -0.1

7.3 9.0 7.3  
9 10 25

-1.9 -1.3 -0.6

8.9 8.3 7.6 7.0  
25 12 10 0

-0.5 -0.1 +0.6

7.5 7.1 6.4  
7 8 25

-0.9 -0.8 -1.4 -0.5 +0.1

5.8 5.7 6.3 5.4 4.8 4.9  
25 11 10 7 3 0

-0.6 -1.0 -0.3 +1.1


5.4 5.9 5.2 3.8  
5 8 9 2.5

-1.1 -0.4 -1.3 -0.5

5.8 5.1 6.0 5.2 4.7  
25 13 10 6

-0.3 -1.0 -0.3 +1.7

5.0 5.7 5.0 3.0  
5 8 9 2.5

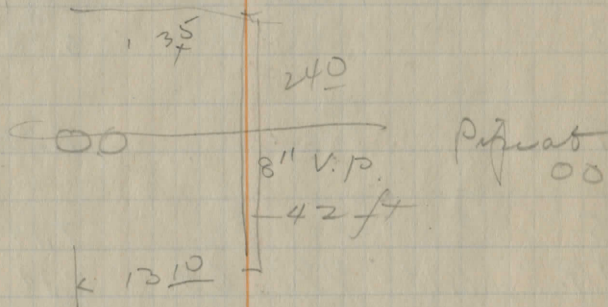

76

## SLOPE STAKES

S.P. 4.01 1004.01  
0+50

1

5.01 1000.00  
999.00

2

T.P. 1.38 992 70

11.51 992.50

3

12.69 991.32

5.20 87.50

4

7.20 85.50

5

T.P. 6.13 990 69

7.44 85.26

6

8.14 84.56

7 on bridge

8

5.14 85.55

3.89 86.80

9

2.85 87.84

T.P. 7.71 996 16

2.24 988.45

10

6.61 89.55

11

4.56 91.60

8-11-22

Fair-Morm

Lt

Hanna

Grou

Sperry

Rt.

77

Gnd. stk

Groundy

Gnd. stk

5.01  
2.01  
3.0

C30  
193

C30  
21.3  
C3.2  
18.3

C3.2  
21.5

C32  
22.5

5.01  
1.21  
3.2

5.81  
2.91  
2.9

C2.9  
192

1.1 slope  
C2.7  
18.2

C3.3  
21.7

C3.4  
22.7

5.81  
2.91  
2.9

11.51  
7.51  
4.5

C4.5

C4.3  
23.2

C3.0  
21.3

C3.0

11.51  
7.51  
3.0

5.20  
6.20  
1.0

F1.0

F1.3  
14.8

F1.4  
14.7

F1.2

5.20  
6.20  
1.0

7.20  
7.70  
.5

F1.5

F1.8  
14.1

F2.0  
13.8

F2.1

7.20  
7.70  
.5

7.44  
9.34  
2.5

F2.5

F2.4  
13.1

F2.6  
13.6

F2.1

7.44  
9.34  
2.1

5.14  
8.64  
3.5

F3.5

F3.8  
16.0

F4.0  
16.4

F4.2

5.14  
8.64  
3.5

3.89  
6.29  
3.1

F3.1

F3.2  
14.8

F2.0  
13.8

F2.8

3.89  
6.29  
2.8

2.85  
3.05  
.2

F0.2

F0.4  
16.2

F0.6  
15.9

F0.5

2.85  
3.05  
.2

6.61  
7.41  
.8

F0.8

F0.9  
15.4

F0.9  
15.4

F0.7

6.61  
7.41  
.8

4.56  
5.56  
1.0

F1.0

F0.9  
15.4

F1.2  
15.0

F1.2

4.56  
5.56  
1.0

78 996 16

12  
T.P. 6.66 100 0 70  
13

14  
T.P. 9.62 1008 47  
15

16

17

18

+50  
T.P. 1.95 1008 08

19

20

21

22  
B.M. #4

2.50 93.66

2.12 994.04

1.99 95.71

2.94 97.76

1.85 998.85

8.66 99.81

6.61 01.86

4.55 03.92

3.20 05.27

2.98 05.49

2.34 1006.13

2.89 05.19

4.38 03.70

5.99 02.09

6.42 01.66

0.89 1007.17

2.50  
3.20  
0.8

FO8

F11  
15.1

C2.0  
19.8

C2.1

79  
2.50  
0.71  
0.1

4.99  
3.10  
0.7

FO9

F16  
14.4

FO1  
16.6

CO1

4.99  
4.27  
0.1

2.94  
3.74  
0.8

FO8

FO9  
15.4

C1.2  
18.6

C1.4

2.94  
1.51  
1.4

8.66  
9.26  
0.7

FO7

FO6  
15.9

FO2  
16.5

FO2

8.66  
8.86  
0.2

6.61  
7.8  
1.2

F1.2

F1A  
14.7

F1.4  
14.7

F1.3

6.61  
7.71  
1.3

4.55  
3.2  
0.7

FO7

FO8  
15.6

FO4  
16.2

FO3

4.55  
4.85  
0.3

3.20  
3.20  
0.1

FO1

FO3  
16.3

C1.0  
18.3

C1.3

3.20  
1.90  
1.3

2.98  
2.78  
0.2

CO2

CO2  
17.0

C1A  
16.9

C1.5

2.98  
1.13  
1.2

2.89  
1.41  
1.4

C1.4

C1.3  
18.7

C2.3  
20.2

C2.5

2.89  
0.13  
2.5

4.38  
4.15  
0.1

CO2

CO1  
16.9

FO8  
15.4

FO.6

4.38  
4.68  
0.6

5.99  
8.49  
2.5

F2.5

F2.3  
13.3

F2.7  
13.8

F2.2

5.99  
8.18  
2.2

6.42  
8.72  
2.3

F2.3

F2A  
13.1

FO5  
16.0

OO

6.42

ok 0.02

22+60

6.32 01.76

23

6.25 01.83

T.P.

8.29

1011 53

4.84 1003.24

24

8.75 02.88

25

7.24 04.29

B.M.

6.83 1004.70

26

8-15-22  
Hot

5.09 06.44

J.P.

5.80

1010.49

1004.69

21

8.19 02.30

22

7.99 0  
02.50

23

7.07 03.42

24

6.63 03.86

25

5.81 04.68

26

as previously set

27

1.82 08.67

T.P.

8.42

1016 61

2.30 1008.19

28

5.71 10.90

+50

5.01 11.60

 $\frac{632}{7.02}$   
 $\frac{0.7}{0.7}$ 

F0.7

F0.9  
15.4C1.1  
18.4

C1.4

 $\frac{632}{4.92}$   
 $\frac{1.4}{1.4}$  $\frac{625}{2.55}$   
 $\frac{0.3}{0.3}$ 

F0.3

F0.9  
15.9C1.0  
18.2

C1.3

 $\frac{625}{4.45}$   
 $\frac{1.3}{1.3}$  $\frac{875}{11.25}$   
 $\frac{0.2}{0.2}$ 

F3.2

F3.2  
14.8F1.5  
14.4

F1.9

 $\frac{875}{10.65}$   
 $\frac{1.9}{1.9}$  $\frac{724}{924}$   
 $\frac{0.01}{0.01}$ 

F2.0

F2.3  
13.8F1.2  
15.0

F0.7

 $\frac{724}{7.94}$   
 $\frac{0.7}{0.7}$  $\frac{509}{5.69}$   
 $\frac{0.8}{0.8}$ 

F0.6

F1.1  
15.1F0.3  
16.3

C0.9

 $\frac{509}{41.9}$   
 $\frac{0.9}{0.9}$  $\frac{819}{11.19}$   
 $\frac{0.6}{0.6}$ 

F3.0

F3.1  
14.6F2.9  
14.2

F2.4

 $\frac{819}{10.59}$   
 $\frac{2.4}{2.4}$  $\frac{799}{11.29}$   
 $\frac{3.3}{3.3}$ 

F3.3

F3.4  
15.2F1.5  
14.5

F1.3

 $\frac{799}{9.29}$   
 $\frac{1.3}{1.3}$  $\frac{707}{9.27}$   
 $\frac{2.2}{2.2}$ 

F2.2

F2.3  
13.8F1.0  
15.8

F0.8

 $\frac{707}{7.87}$   
 $\frac{0.8}{0.8}$  $\frac{643}{11.13}$   
 $\frac{4.5}{4.5}$ 

F4.5

F4.5  
17.4F3.4  
15.2

F3.5

 $\frac{643}{10.13}$   
 $\frac{3.5}{3.5}$  $\frac{5.81}{8.3}$   
 $\frac{1.5}{1.5}$ 

F2.5

F2.6  
13.6F1.7  
14.2

F1.3

 $\frac{5.81}{7.11}$   
 $\frac{1.3}{1.3}$  $\frac{1.82}{3.12}$   
 $\frac{2.1}{2.1}$ 

F2.1

F2.0  
13.8F0.4  
16.2

O.0

 $\frac{1.82}{1.82}$   
 $\frac{0.0}{0.0}$  $\frac{5.71}{6.91}$   
 $\frac{1.2}{1.2}$ 

F1.2

F1.7  
14.2C2.5  
20.7

C2.9

 $\frac{5.71}{2.81}$   
 $\frac{1.7}{1.7}$  $\frac{5.01}{4.1}$   
 $\frac{0.1}{0.1}$ 

C0.1

F0.1  
16.6C2.3  
20.2

C2.9

 $\frac{5.01}{2.1}$   
 $\frac{2.9}{2.9}$

82		1016	61		
29				5.11	11.50
T.P.	5.58	1016	37	5.82	1010.79
30				5.87	10.50
+50				6.06	10.31
31				5.62	10.75
32				4.12	12.25
T.P.	5.60	1019	03	2.94	1013.43
33				4.65	14.38
34				1.23	17.80
T.P.	12.30	1031	05	0.28	1018.75
35				9.22	21.83
36				5.18	25.87
T.P.	5.94	1034	45	2.54	1028.51
B.M.				1.39	1033.55
37				5.18	29.27
38				5.55	28.90
39				6.55	27.90
T.P.	3.98	1032	03	6.40	1022.05
39				4.13	27.90

5.11 6.31 14	F1.4	F1.5 14.5	col 16.9	C0.5	5.11 4.61 0.5
5.87 5.17 6.3	F6.3	1.210° F6.6 18.1	col 17.4	C0.5	5.87 5.17 0.5
6.06 8.76 2.7	F2.7	F2.8 14.0	col 16.8	C0.0	6.06 6.46 0.0
5.62 5.72 4.1	F2.1	F2.2 13.5	col 17.7	C0.0	5.62 5.62 0.0
4.12 4.22 0.1	F0.3	F0.8 15.6	F0.5 16.0	C0.3	4.12 3.9 0.2
4.65 5.25 1.0	F1.0	F0.8 15.6	C1.6 17.1	C2.4	4.65 5.25 2.4
1.23 2.53 1.3	F1.3	F1.9 14.1	F1.9 14.1	F1.3	1.23 2.53 1.3
9.22 8.72 0.5	C0.5	col 17.1	C2.0 19.8	C2.1	9.22 7.72 1.5
5.18 7.48 1.3	F1.9	F2.0 13.8	F0.9 16.2	F0.1	5.18 5.18 0.1
5.18 5.18 0.0	0.0	0.0 16.8	C1.2 18.6	C1.3	5.18 3.98 1.3
5.55 5.55	0.0	0.0 16.8	C1.5 19.0	C1.6	5.55 3.95 1.5
6.55 6.55 0.4	F0.4	F0.5 16.0			6.55
			col 17.7	C0.8	4.13 3.32 0.8

84	1032 03											85
40			5.13	26.90	$\frac{513}{633}$ $\frac{17}{17}$	F1,2	$\frac{F1,2}{15.0}$	$\frac{F0,5}{16.0}$	F0,2			$\frac{513}{535}$ $\frac{0.7}{0.7}$
T.P	4.26	1029 78	6.51	1025.52		F3,5	$\frac{F3,5}{15.4}$	$\frac{F1,9}{13.9}$	F1,8			$\frac{3.08}{4.7}$ $\frac{1.8}{1.8}$
41			3.08	26.70	$\frac{308}{658}$ $\frac{3.5}{3.5}$							
<del>T.P</del>			<del>2.89</del>	<del>1026.89</del>								
42			1.81	28.97	$\frac{181}{0.9}$ $\frac{0.9}{0.9}$	C0,9	$\frac{C0,8}{17.0}$	$\frac{E1,3}{14.8}$	F0,9			$\frac{1.81}{2.71}$ $\frac{0.7}{0.7}$
T.P	9.49	1038 37	0.90	1028.88	$\frac{541}{421}$ $\frac{17}{17}$	C1,2	$\frac{C1,0}{18.3}$	$\frac{C3,5}{22.0}$	C3,7			$\frac{5.41}{1.7}$ $\frac{3.7}{3.7}$
43			5.41	32.96								
T.P	6.62	1040 89	4.10	1034.27	$\frac{503}{563}$ $\frac{0.6}{0.6}$	F0,6	$\frac{F0,6}{15.9}$	$\frac{C1,9}{18.7}$	C2,1			$\frac{5.03}{2.93}$ $\frac{2.1}{2.1}$
44			5.03	35.86								
45			4.44	36.45	$\frac{444}{654}$ $\frac{21}{21}$	F2,1	$\frac{F2,3}{13.3}$	$\frac{F1,8}{14.1}$	F1,3			$\frac{4.44}{5.74}$ $\frac{1.7}{1.7}$
46			4.99	35.90	$\frac{499}{959}$ $\frac{0.9}{0.9}$	F0,9	$\frac{F1,0}{15.3}$	$\frac{C0,9}{18.1}$	C1,1			$\frac{4.99}{3.89}$ $\frac{1.7}{1.7}$
B.M.			4.86	1036.03	$\frac{486}{904}$ $\frac{0.4}{0.4}$							

8-16-'22 A.M.  
HotHanna  
Grove  
Sperry

86

B.M. 3.08 1099 24  
121+18109616  
94.235.01  
5.11  
0.1

120

6.38

92.86

6.38  
7.37  
1.0

119

6.40

92.84

6.40  
7.10  
0.7

118

6.40

92.84

6.40  
6.60  
0.2

New B.M.

117

4.43

1094.81

staple in E. root 20' Maple

7.39

91.85

7.39  
7.39  
0.0

T.P.

7.23 1098 06

8.41

1090.83

116

7.22

90.84

7.22  
9.22  
2.0

115

5.22

92.84

5.22  
6.52  
1.5

+50

5.08

92.98

5.08  
5.58  
0.5

114

7.22

90.84

7.22  
5.82  
1.4

T.P.

2.48 1089 15

11.39

1086.67

113

2.48 5

3.10

86.05

3.10  
4.10  
1.0

112

5.51

83.64

5.51  
7.41  
1.9

111

6.21

82.94

6.21  
7.18  
0.9

T.P.

4.90 1087 46

6.49

1082.66

Lt

Rt

87

F0.1

F0.3  
16.3C0.9  
18.1

C1.3

5.01  
5.11  
0.15.01  
3.71  
1.3

F2.0

F2.1  
13.6F0.3  
15.6

F0.7

6.38  
7.37  
1.06.38  
7.37  
1.0

F0.7

F0.3  
15.6C0.9  
18.0

C0.9

6.40  
7.10  
0.76.40  
5.50  
0.9

F0.2

F0.3  
16.3C1.3  
18.7

C1.4

6.40  
6.60  
0.26.40  
5.00  
1.4

F0.9

F1.1  
15.1F1.6  
14.4

F0.3

Rt. 2nd from S end of row.

7.39  
7.39  
0.07.39  
3.17  
4.2

F2.0

F1.9  
13.9C0.1  
16.9

C0.5

7.22  
9.22  
2.07.22  
6.22  
1.0

F1.5

F1.6  
14.4C0.1  
16.9

C0.3

5.22  
6.52  
1.55.22  
4.92  
0.3

F0.5

F0.4  
16.2C1.5  
19.0

C1.7

5.08  
5.58  
0.55.08  
3.38  
1.7

C1.4

C1.7  
18.6C2.8  
21.0

C3.0

7.22  
5.82  
1.47.22  
4.22  
3.0

F1.0

F0.9  
15.4C2.7  
24.1

C2.5

3.10  
4.10  
1.03.10  
2.60  
0.5

F1.9

F2.7  
13.5F1.7  
14.2

F1.3

5.51  
7.41  
1.95.51  
4.51  
1.0

F1.4

F1.8  
14.1F1.6  
14.4

F0.7

6.21  
7.18  
0.96.21  
6.97  
0.7

88

110 ↓

1087, 46

5,22 82.24

109 ↓

5,92 81.54

T.P. 3.77 1085 88

5,35 1082,11

109

4,34 81,54

T.P. 1.58 1085 38

2,08 1083,80

108

3,94 81,44

107

2,84 82,54

106

1,58 83,80

+50

2,08 83,30

105

3,42 81,96

T.P. 1,94 1083 40

3,92 1081,46

104

6,36 77,04

T.P. 1,58 1077,34

7,64 1075,76

103

5,66 71,68

+50

7,67 69,67

TR 6,03 1075,41

7,96 1069,38

102

6,41 69,00

B.M. 6,68 1075 34

6,8 1068,73

E-  
LHW-  
RH

89

5,22  
5,52  
0,3

F0,3

F0,3  
16,3C1,8  
19,5

C2,3

5,22  
5,52  
2,35,92  
6,2  
1

F1,0

F1,1  
15,1C0,2  
17,1

C0,4

4,34  
3,94  
0,4

Blued rock W. side rd 1087+50

3,94  
4,34  
0,4

F0,4

F0,5  
16,0C0,3  
17,2

C0,4

3,94  
3,54  
0,42,84  
4,54  
1,7

F1,7

F1,7  
14,2F1,2  
15,0

F0,9

2,84  
3,14  
0,31,58  
2,28  
0,7

F0,7

F0,8  
15,6C1,3  
18,7

C1,3

1,58  
0,28  
1,32,08  
2,28  
0,2

F0,2

F0,3  
16,3C0,4  
17,7

C1,0

2,08  
1,68  
1,03,42  
3,42

0,0

F0,2  
16,5F0,1  
16,6

C0,5

3,42  
2,92  
0,55,36  
7,26  
1,9

F1,4

F1,9  
13,9C5,0  
24,3

C5,4

5,36  
0,965,66  
7,16  
1,5

F1,5

F2,1  
13,7C2,4  
17,9

C2,7

5,66  
2,96  
2,77,67  
9,27  
1,6

F1,6

F1,5  
14,5F1,4  
14,6

F0,6

7,67  
8,27  
0,66,41  
8,11  
1,7

F2,0

F1,7  
14,2F2,0  
13,8

F2,1

6,41  
8,51  
2,1

90		1075	34	1.65	73.69	$\frac{165}{3.45}$ 1.8	F1.8	$\frac{F1.8}{14.1}$	$\frac{F2.1}{13.6}$	F2.0	91
101				0.14	1075.23	$\frac{3.94}{2.54}$ 1.5	C1.4	$\frac{C1.2}{18.6}$	$\frac{C1.5}{19.0}$	C2.0	$\frac{165}{3.45}$ 2
T.P.	11.38	1086	61	3.94	82.67	$\frac{3.94}{1.7}$					$\frac{3.94}{1.7}$ 2.3
100				2.06	1094.55	$\frac{4.86}{1.75}$	0.0	$\frac{0.0}{16.8}$	$\frac{C1.8}{19.5}$	C1.9	$\frac{4.86}{1.75}$ 2.8
T.P.	9.10	1093	95	4.86	89.09	$\frac{3.37}{1.7}$	F1.3	$\frac{F1.2}{15.0}$	$\frac{C1.1}{18.4}$	C1.4	$\frac{3.37}{1.7}$ 2.0
99				4.91	89.04	$\frac{4.91}{1.7}$	F2.0	$\frac{F2.1}{13.6}$	$\frac{C0.5}{17.5}$	C0.8	$\frac{4.91}{1.7}$ 2.9
+50				11.01	82.94	$\frac{11.01}{1.7}$	F0.7	$\frac{F0.8}{15.6}$	$\frac{C1.2}{18.6}$	C1.4	$\frac{11.01}{1.7}$ 6.5
98				12.06	1081.99	$\frac{5.69}{2.0}$	F2.0	$\frac{F1.2}{13.9}$	$\frac{F0.9}{15.4}$	F0.8	$\frac{12.06}{2.0}$ 6.0
T.P.	0.64	1082	53	5.69	76.84	$\frac{9.81}{1.2}$	F.1.2	$\frac{F1.2}{15.0}$	$\frac{F0.5}{16.0}$	F0.4	$\frac{9.81}{1.2}$ 8.2
96				9.81	72.72	$\frac{3.41}{0.2}$	F0.2	$\frac{F0.4}{16.2}$	$\frac{C2.3}{20.2}$	C2.7	$\frac{3.41}{0.2}$ 17.1
T.P.	3.04	1075	37	10.20	1072.33	$\frac{3.93}{0.1}$	F0.1	$\frac{F0.5}{16.0}$	$\frac{C3.5}{22.0}$	C3.8	$\frac{10.20}{0.1}$ 102.0
94				3.41	71.76	$\frac{5.49}{0.6}$	F0.8	$\frac{F1.0}{15.3}$	$\frac{C0.8}{18.0}$	C1.2	$\frac{5.49}{0.6}$ 9.2
93				3.93	71.44						$\frac{3.93}{0.1}$ 3.9
92				5.49	69.88						$\frac{5.49}{0.1}$ 54.9
T.P.	3.00	1070	92	7.45	1067.92						$\frac{7.45}{0.1}$ 74.5
B.A.				4.47	1066.75						$\frac{4.47}{0.1}$ 44.7

92		1070	92		
91				3.65	67.27
90				6.78	64.14
89				9.59	61.33
T.P.	1.66	1060	98	11.60	1059.32
88				1.82	59.16
T.P.	1.38	1061	76	0.60	1060.38
88				2.60	59.16
87				3.96	57.80
86				4.38	57.38
85				3.81	57.95
T.P.	7.41	1064	95	4.22	1057.54
84				5.49	59.46
83				5.21	59.74
T.P.	4.63	1061	42	8.16	1056.79
82				4.96	56.46
T.P.	2.87	1053	13	1.16	1050.26
81				1.67	51.46
80				5.55	47.58

3.65 4.80 1.15	F12	F15 14.5	C3.4 21.9	C3.5	93 3.65 0.15 3.5
6.78 8.89 2.11	F21	F24 13.2	C0.8 18.0	C1.0	67.8 5.78 1.0
9.59 11.57 2.0	F20	F1.8 14.2	F0.8 15.6	F0.6	9.59 10.19 0.6
1.82 2.13 0.31	F03	F0.6 15.7	C2.1 18.9	C1.2,3	1.82 2.60 0.78 4.1
3.96 4.56 0.6	F0.8	F0.9 15.4	C0.4 17.4	C0.4	3.96 3.56 0.4
4.38 6.69 2.31	F2.3	F20 13.8	F1.4 14.7	F1.3	4.38 5.69 1.3
3.81 4.91 1.1	F1.1	F1.3 14.8	F1.5 14.5	F1.5	3.81 5.71 1.9
5.49 5.49 0	10.0	F0.1 16.6	C2.0 19.8	C2.2	5.49 3.29 2.2
5.21 6.21 1.0	F1.0	F1.0 15.2	C0.2 17.1	C0.6	5.21 4.21 1.0
4.96 3.96 1.0	C1.5	C1.5 19.0	C3.2 21.6	C3.6	4.96 1.96 3.0
1.67 1.27 0.4	F2.4	F2.8 14.0	F2.1 13.6	F2.2	1.67 3.87 2.2
5.55 7.25 1.7	F1.7	F1.3 14.8	F4.8 22.0	F1.2	5.55 13.35 7.8

8-24-22

94		1053	13		
T.P.	7.56	1054	57	6.12	1047.01
79				5.41	49.16
78				10.41	44.16
T.P.	1.16	1043	37	12.36	1042.21
77				5.24	38.13
T.P.	5.04	1056	75	11.66	1031.71
76				3.03	33.72
B.M.				5.00	1031.75
75				4.03	32.72
T.P.	10.62	1046	01	1.36	1035.39
74				7.98	38.03
T.P.	2.74	1055	56	0.19	1045.82
73				9.38	46.17
72				3.83	51.73
B.M.	4.70	1055	62	4.80	1050.76
71				3.83	51.79
T.P.	1.35	1053	10	3.87	1051.75
70				6.12	46.98
69				11.05	42.05
T.P.	2.20	1042	69	12.61	1040.49
68				4.41	38.28

Blood N.W. Cor. W. Par.

$\frac{5.41}{2.16}$	C14	$\frac{C13}{18.7}$	$\frac{C3.7}{22.3}$	C4.0	$\frac{5.41}{2.16}$
$\frac{10.41}{3.15}$	C4.5	$\frac{C4.4}{23.5}$	$\frac{C5.5}{21.0}$	1:1 slope	$\frac{10.41}{3.15}$
$\frac{5.24}{5.14}$	C0.1	$\frac{F0.7}{16.2}$	$\frac{C0.3}{17.2}$	C0.7	$\frac{5.24}{5.14}$
$\frac{3.03}{2.16}$	F7.2	$\frac{F7.2}{22.8}$	$\frac{F1.7}{13.9}$	F1.7	$\frac{3.03}{2.16}$
$\frac{4.03}{5.63}$	F1.6	$\frac{F1.8}{14.1}$	$\frac{F1.7}{14.3}$	F1.6	$\frac{4.03}{5.63}$
$\frac{7.98}{10.38}$	F2.4	$\frac{F2.5}{13.0}$	$\frac{C5.0}{24.3}$	C5.4	$\frac{7.98}{10.38}$
$\frac{8.37}{7.59}$	C1.8	$\frac{C1.8}{14.5}$	$\frac{C5.8}{25.5}$	C0.0	$\frac{8.37}{7.59}$
$\frac{3.83}{4.43}$	F0.6	$\frac{F0.7}{15.7}$	$\frac{C0.7}{17.1}$	C1.2	$\frac{3.83}{4.43}$
$\frac{3.83}{5.14}$	F1.0	$\frac{F1.1}{15.1}$	$\frac{F0.5}{16.0}$	F0.5	$\frac{3.83}{5.14}$
$\frac{6.12}{4.66}$	C1.5	$\frac{C1.2}{18.4}$	$\frac{F1.4}{14.7}$	F1.4	$\frac{6.12}{4.66}$
$\frac{11.05}{6.70}$	C4.3	$\frac{C4.1}{19.6}$	$\frac{F1.7}{14.3}$	F1.5	$\frac{11.05}{6.70}$
$\frac{4.41}{5.14}$	F1.5	$\frac{F1.5}{14.5}$	$\frac{C0.9}{15.1}$	C1.8	$\frac{4.41}{5.14}$

95

96		1042	69	7.61	35.08
67				7.15	1035.54
T.P.	2.66	1038	20	3.12	33.08
66				5.40	32.80
T.P.	3.47	1041	01	0.66	1037.54
65				6.00	35.01
T.P.	9.78	1050	67	0.12	1040.89
64				6.97	43.70
T.P.	8.33	1058	46	0.54	1050.13
63				6.91	51.55
62				4.36	54.10
B.M.				0.78	1057.67
61				7.16	51.30
T.P.	2.02	1050	38	10.10	1048.36
60				5.00	45.38
T.P.	6.77	1054	97	2.17	1048.26
59	LH			7.87	47.10
T.P.	10.95	1059	15	6.77	48.20
59	RT			12.05	47.10
T.P.	6.27	1054	47	10.95	1048.20
58				4.37	50.10
T.P.	9.59	1061	32	2.74	1051.73

761	F1,9	F2,7		761	97
$\frac{9.51}{1.9}$		$\frac{13.3}{1.3}$			
			$\frac{C0,7}{17.8}$	$\frac{C1,1}{17}$	$\frac{3/2}{40}$
$\frac{5.40}{1.8}$	F1,8	$\frac{F1,8}{14.1}$	$\frac{F1,6}{14.1}$	F1,5	$\frac{3.40}{11}$
$\frac{6.00}{2.5}$	F2,5	$\frac{F2,7}{13.8}$	$\frac{F2,9}{14.0}$	F4,0	$\frac{6.00}{10.00}$
$\frac{6.97}{3.0}$	C3,0	$\frac{C2,1}{19.8}$	$\frac{F1,5}{14.5}$	F1,2	$\frac{6.97}{8.17}$
$\frac{6.91}{1.9}$	①,①	$\frac{F0,5}{14.0}$	$\frac{C3,8}{22.5}$	C4,2	$\frac{6.91}{7.2}$
$\frac{4.36}{2.0}$	F2,0	$\frac{F2,0}{13.8}$	$\frac{C0,2}{17.0}$	C0,4	$\frac{4.36}{3.96}$
$\frac{7.16}{1.5}$	C1,6	$\frac{C1,6}{19.2}$	$\frac{C3,2}{21.6}$	C3,7	$\frac{7.16}{3.7}$
$\frac{5.00}{1.6}$	F4,6	$\frac{F4,5}{17.5}$	$\frac{F1,7}{14.2}$	F1,4	$\frac{5.00}{1.9}$
$\frac{7.87}{1.5}$	C3,3	$\frac{C3,3}{18.8}$			$\frac{7.87}{1.9}$
			$\frac{C8,8}{24.3}$	C8,9	$\frac{12.05}{3.5}$
$\frac{4.37}{1.4}$	F4,0	$\frac{F0,9}{16.2}$	$\frac{F2,1}{13.6}$	F2,1	$\frac{4.37}{2.7}$

1:1 slope

98		1061 32			
57			7.42	53.90	
T.P.	12.13	1063 86	<del>9.50</del>	1051.73	
56			5.36	58.50	
T.P.	5.33	1066 87	2.32	1061.54	
B.M.			0.11	1066.76	
55			5.02	61.85	
54			9.11	57.76	
B.M.	0.12	1066 86		1066.74	
T.P.	1.71	1059 36	9.21	1057.65	
53			7.04	52.32	
T.P.	12.81	1070 46	1.71	1057.65	
T.P.	0.07	1057 72	12.81	1057.65	
T.P.	3.00	1050 10	11.50	1046.22	
52			3.18	46.92	
T.P.	1.53	1040 87	10.76	1039.34	
51		1040 87	7.93	42.17	
50			2.15	38.72	
49			4.74	36.13	
B.M.			4.84	36.02	

742 7.42	00	F05 16.0	C23 slope 17.8 1:1	C2.9	99 742 7.42
536 5.36 0.2	C0.2	C04 17.4	C50 20.5 1:1	C5.2	536 5.36
502 5.02 0.2	F0.3	F05 16.0	C33 18.3 1:1 slope 1:1 ditch	C3.5	502 5.02 3.5
911 9.11 0.2	F0.3	F0.3 16.3	F0.3 16.3	C08 18.0	F1.0 9.11 1.0
704 7.04 1.4	C1.9	1:1.5 slope 17.5	C20 17.5	C12.7	18.4 1.84
318 3.18 0	F3.0	F2.9 14.2	F0.2 16.5	0.0	3.18 3.18
793 7.93 3.6	F3.6	F3.3 15.0	C2.2 17.7 1:1 slope	C3.1	7.93 7.93 3.1
215 2.15 0.4	F2.4	F2.1 13.6	F0.2 16.5	F0.3	2.15 2.15 0.3
474 4.74 0.5	F0.5	F0.6 15.9	C30 18.5 1:1 slope	C3.5	4.74 4.74 0.5

100

1040 87

48

13  
17

5.86

35.01

 $\frac{5.86}{1.7}$ 

F1.9

 $\frac{F1.8}{14.1}$ and ctk  
set at 185  
@ w. trough

F0.8

 $\frac{5.86}{2.8}$ 

47

13  
17

5.52

35.35

 $\frac{5.52}{1.5}$ 

F1.5

 $\frac{F1.9}{13.8}$  $\frac{C0.8}{18.0}$ 

C1.4

 $\frac{5.52}{1.4}$ 

101

section of Chardon-Auburn Rd

10-27-22

103

102

C.H. #4, Sec. J & K

Newbury Twp-

12

11

10

+50 P.I. 3°-17' Rt. E. = 2'

9

8

7

6

5

4

3



P.I. 17°-34' Rt. E = 5'

2

1

0

offset stakes 20' Rt of E

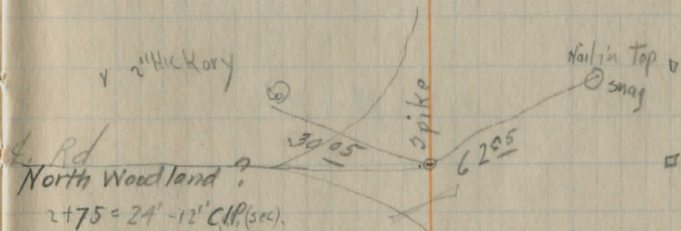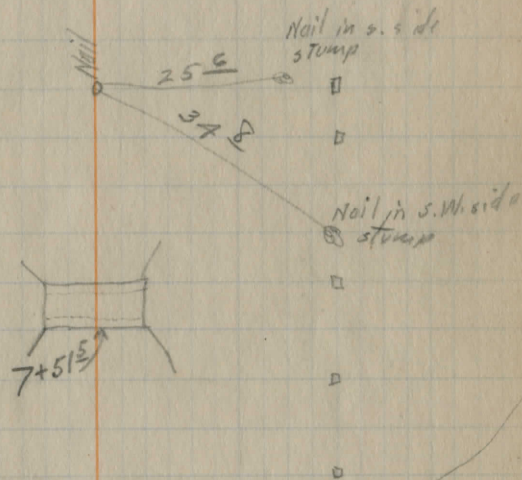

20'

+ 60<sup>s</sup> Δ

15

14

13

Lt. E = 7'


V.N.E. side

4/3

RTI

13

20



106

X Sections N. of Smiths Xing

F.M.	10.75	110	75		100.00
0				2.2	108.6
1				4.3	106.5
2				8.0	102.9
T.P.	2.66	101	86	11.55	99.20
3				6.9	95.0
				3.4	98.5
				3.3	98.6
				2.8	99.1
+40				11.7	90.2
T.P.	0.46	90	68	11.63	90.23
+60				3.4	87.3
4				8.8	81.9
T.P.	0.62	79	51	11.80	78.89
5				11.1	68.4
T.P.	0.44	67	12	12.83	66.68
+50				3.5	63.6
6				6.2	60.9
7				8.2	58.9

107

Assumed Elev. Nail in S.W. side 10" Hickory 100' W. of sta 3

$$\frac{-1.4}{25} \frac{-0.7}{16} \frac{-0.8}{9} \frac{-1.2}{8} \frac{-0.5}{3} \frac{-0.1}{2} 0.0 \frac{-0.4}{4} \frac{-2.2}{8} \frac{0.0}{12} \frac{+0.8}{25}$$

$$\frac{-0.5}{25} \frac{-0.1}{14} \frac{-1.2}{10} \frac{-0.3}{7} 0.0 \frac{-0.5}{2} \frac{-0.8}{7} \frac{-0.7}{12} \frac{+1.5}{15} \frac{+2.2}{25}$$

$$\frac{+1.4}{25} \frac{+1.2}{18} \frac{+1.9}{14} \frac{-1.5}{7} \frac{-0.5}{2} 0.0 \frac{-0.7}{8} \frac{-1.1}{11} \frac{+3.8}{20} \frac{+3.7}{25}$$

$$\frac{+1.3}{25} \frac{+1.1}{19} \frac{+0.2}{9} 0.0 \frac{0.0}{5} \frac{-3.5}{7} \frac{-1.3}{11} \frac{+0.6}{14} \frac{+3.9}{18} \frac{+4.3}{25}$$

50' Lt in Rd, width Rd bed Lt = 12' turnout  
 100' " " " is wider.

150' " " "

$$\frac{+5.1}{25} \frac{+4.4}{20} \frac{-0.5}{12} \frac{+0.3}{11} 0.0 \frac{0.0}{6} \frac{-0.6}{8} \frac{-3.6}{9} \frac{+0.8}{13} \frac{+4.1}{18} \frac{+4.1}{25}$$

$$\frac{+6.2}{25} \frac{+5.7}{21} \frac{+4.0}{16} \frac{-0.9}{10} \frac{-0.1}{7} 0.0 \frac{-0.2}{8} \frac{-4.0}{11} \frac{+2.5}{17} \frac{+5.1}{25}$$

$$\frac{+2.8}{25} \frac{+2.5}{16} \frac{-0.6}{10} \frac{-0.1}{9} 0.0 \frac{0.0}{5} \frac{-3.0}{7} \frac{+4.3}{16} \frac{+4.5}{20} \frac{+3.5}{25}$$

Nail in fence post Lt.

$$\frac{+1.6}{25} \frac{0.0}{21} \frac{+0.5}{20} \frac{-0.6}{12} \frac{-0.1}{11} 0.0 \frac{+0.3}{6} \frac{-3.2}{8} \frac{+1.0}{10} \frac{0.0}{12} \frac{-0.6}{20} \frac{-0.6}{25}$$

$$\frac{-3.5}{25} \frac{-1.9}{19} \frac{-1.5}{16} \frac{-0.7}{12} \frac{0.0}{9} 0.0 \frac{+0.1}{7} \frac{-1.2}{10} \frac{-1.7}{11} \frac{-1.3}{13} \frac{-0.6}{15} \frac{-0.3}{22} \frac{+0.5}{25}$$

$$\frac{5.3}{25} \frac{-5.4}{18} \frac{-4.1}{12} \frac{-2.5}{9} \frac{-0.2}{5} 0.0 \frac{+0.1}{7} \frac{-0.7}{11} \frac{-1.2}{25}$$

$$\frac{-4.9}{25} \frac{-4.0}{11} \frac{-0.7}{6} 0.0 \frac{-0.2}{5} \frac{-0.8}{7} \frac{-2.9}{11} \frac{-3.5}{25}$$

+40  
+51<sup>E</sup>

6.9 60.2  
5.9 61.2  
5.9 61.2  
7.37 59.75  
7.62 59.50  
5.3 61.8  
14.0 53.1

+51<sup>E</sup> 12' span - 14' Iron bridge  
con floor Exc. Cond.

+75

4.8 62.3

8

3.4 63.7

T.P.

12.94

79

19

0.87 66.25

+50

94 69.8

9

3.3 75.9

$\frac{5.6}{25} - \frac{5.2}{15} - \frac{1.2}{9} - \frac{0.1}{5} \frac{0.0}{5} - \frac{0.3}{5} - \frac{1.4}{7} - \frac{5.3}{15} - 2.5$

S. end con Bry. floor


N. " " " "

S. " Bry. seat

N. " " "

± Rd outhead bridge dirt.

Bot. Creek

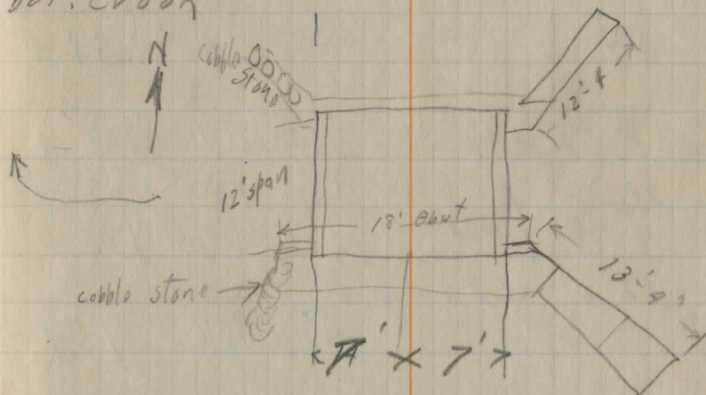

$\frac{6.9}{25} - \frac{5.9}{17} - \frac{0.2}{8} \frac{0.0}{5} \frac{0.0}{5} - \frac{3.0}{12} - \frac{3.2}{25}$

$\frac{-2.5}{25} - \frac{0.8}{15} + \frac{0.1}{11} \frac{0.0}{5} + \frac{0.1}{15} \frac{0.0}{15} - \frac{0.3}{20} - \frac{0.4}{25}$

$\frac{+2.7}{25} + \frac{+2.4}{22} + \frac{+0.5}{17} - \frac{0.3}{15} + \frac{+0.3}{12} \frac{0.0}{5} + \frac{+0.3}{5} - \frac{0.8}{7} - \frac{2.2}{9-10} - \frac{1.7}{12} + \frac{+3.0}{18} + \frac{+3.6}{20} + \frac{2.2}{25}$

$\frac{+1.2}{25} + \frac{+1.8}{12} + \frac{+1.7}{17} + \frac{+2.4}{15} - \frac{0.4}{11} + \frac{+0.7}{8} \frac{0.0}{5} - \frac{0.8}{6} - \frac{1.9}{8} - \frac{0.4}{10} + \frac{+2.2}{13} + \frac{+3.5}{20} + \frac{+3.1}{25}$

T.P.	12.46	91 01	0.64	78.55
9+50			10.6	80.4
10			6.9	84.1
T.P.	12.35	102 37	0.99	90.02
11			8.3	94.1
+25			5.0	97.4
+75			0.9	102.4
T.P.	12.06	114 40	0.03	102.34
12			10.1	104.3
T.P.	13.13	126 94	0.59	113.81
+80			10.8	16.1
13			9.2	17.7
+15			6.7	20.2
T.P.	12.37	139 15	0.10	126.79
14			11.0	27.6
15			3.8	35.4

$\frac{+0.1}{25}$	$\frac{+0.6}{14}$	$\frac{-0.9}{15}$	$\frac{-0.2}{12}$	$\frac{0.0}{7}$	$\frac{+0.3}{6}$	$\frac{-0.3}{8}$	$\frac{-1.1}{9-10}$	$\frac{+2.9}{14}$	$\frac{+2.1}{25}$		
$\frac{+1.0}{25}$	$\frac{+1.4}{13}$	$\frac{-0.8}{10}$	$\frac{+0.00}{8}$	$\frac{+0.1}{8}$	$\frac{-0.5}{11}$	$\frac{+2.1}{15-25}$					
$\frac{+0.2}{25}$	$\frac{+0.4}{17}$	$\frac{-1.8}{15}$	$\frac{-1.1}{14}$	$\frac{0.0}{11}$	$\frac{+0.2}{7}$	$\frac{0.0}{9}$	$\frac{-0.3}{11}$	$\frac{-2.6}{11}$	$\frac{+1.4}{15}$	$\frac{+2.1}{20}$	$\frac{+2.3}{25}$
$\frac{-0.4}{25}$	$\frac{0.0}{19}$	$\frac{-0.6}{13-14}$	$\frac{+0.2}{7}$	$\frac{0.0}{7}$	$\frac{-0.2}{9}$	$\frac{-1.9}{11-12}$	$\frac{+0.5}{15}$	$\frac{+1.0}{25}$			
$\frac{+0.5}{25}$	$\frac{+0.8}{14}$	$\frac{-1.0}{12-7}$	$\frac{-0.2}{7}$	$\frac{0.0}{7}$	$\frac{-0.4}{7}$	$\frac{-1.0}{9-10}$	$\frac{+1.4}{13}$	$\frac{+1.7}{25}$			
$\frac{+2.4}{25}$	$\frac{+2.3}{14}$	$\frac{-0.3}{10}$	$\frac{0.0}{8}$	$\frac{0.0}{8}$	$\frac{+0.1}{7}$	$\frac{-1.3}{9-10}$	$\frac{+2.5}{13}$	$\frac{+3.5}{25}$			
$\frac{+1.8}{25}$	$\frac{+2.5}{13}$	$\frac{+0.3}{10}$	$\frac{-0.8}{8}$	$\frac{-0.1}{5}$	$\frac{0.0}{3}$	$\frac{-0.2}{12}$	$\frac{-0.8}{5}$	$\frac{-0.2}{8-9}$	$\frac{+1.0}{14}$	$\frac{+4.2}{25}$	
$\frac{+2.2}{25}$	$\frac{+2.8}{21}$	$\frac{+1.2}{13}$	$\frac{-0.2}{9}$	$\frac{+0.3}{7}$	$\frac{0.0}{2}$	$\frac{-0.3}{8}$	$\frac{-0.1}{8}$	$\frac{+3.8}{13}$	$\frac{+3.2}{25}$		
$\frac{+1.5}{25}$	$\frac{+2.3}{18}$	$\frac{+2.1}{13}$	$\frac{-0.7}{10}$	$\frac{-0.1}{6}$	$\frac{-0.5}{5}$	$\frac{0.0}{3}$	$\frac{-1.1}{4}$	$\frac{-0.2}{5}$	$\frac{-0.9}{8-9}$	$\frac{+1.5}{11}$	$\frac{+0.1}{25}$
$\frac{+1.2}{25}$	$\frac{+0.7}{14}$	$\frac{-0.9}{11}$	$\frac{+0.3}{8}$	$\frac{0.0}{8}$	$\frac{-0.4}{6}$	$\frac{-1.0}{8}$	$\frac{0.0}{11}$	$\frac{-0.6}{25}$			
$\frac{+0.2}{25}$	$\frac{+0.3}{14}$	$\frac{-0.8}{12}$	$\frac{+0.1}{9}$	$\frac{0.0}{4}$	$\frac{-0.2}{4}$	$\frac{-1.0}{6}$	$\frac{+0.1}{9}$	$\frac{+0.3}{25}$			

112

+60<sup>±</sup>

±

B.M.

139 15

2.0 37.2

0.3 38.9

2.36 136.79

$$\frac{-11}{25} \quad \frac{-05}{11} \quad \frac{00}{8} \quad \frac{00}{4} \quad \frac{+02}{8-9} \quad \frac{-06}{11} \quad \frac{+08}{16} \quad \frac{+05}{25} \quad \frac{+07}{25}$$

113

± 50' North

Top of stump 30' Rt. 14+90

114

10+00

10'

9+00

10'

+98

$\Delta = 0-00$

SPK

8+00

10'

7+00

10'

+84<sup>35</sup>

6+00

10'

5+00

15'

4

15'

3

15'

2+00

15'

1+00

15'

0+00

+50 - 17

8 9 10  
A  
H

115

SPK. S.W. side  
C.E.I. (Kettle) pole  
#281833

PL.

37.20

30  
I.P.

SPK

NO M.B. 8-79

PL.

30  
I.P.

agulla

E

SPK. E. side  
C.E.I. (6" up)

#281839

36.75

?  
SPK. W. side  
around post  
(30" up)

57.6

BUTTERNUT - C.H. 21

C.H. 21  
Burton-Chester  
Road

31.35

I. bolt  
fd.

SPK N. side 8"  
Osage (1' up)  
(5' E. of 4)

49.26

11  
①

SPK. W. side 8"  
Osage (2' up)

23

22

21

20

19

18

17

16

15

14

13 ± 30 = Twp Line

13+00

+78<sup>10</sup>

176-10 To EAST Spk  
352-20 Δ = R 3° 50'

12+00

11+00

15'

I.P.

10'


10'

Spk NE side of NE  
6" Elm in clump

58  
58

50 65

58 60



Spk. NW side  
Crotched Cherry  
3' N. of fence

I.P. No. 21 MAR. 178 GEN  
No MB 8-79

118

36

+51<sup>04</sup>

Δ DEF L 2°38'

35

34

+19 CULVERT [ 195-6-18- ] 4<sup>s</sup> x 3 wide Good

33

(12')

32

31

30

+03<sup>83</sup>

SPK (P.O.T.)

29


28

27

26

25

24



FD. 19 MAY 198 H&P, R.E.H.

20

SEE NEW REF PG 151

1.19

SEX 10x10 POST

2780

(3)

NO M.B.

3160

SW & 10x10 GATE POST



SEX 10x10 POST

3925

3408

SW & 10x10 GATE POST

#278107

SPK NE SIDE CEI POLE

SPK W SIDE 10" & FENCE POST

424

NO M.B.

120			(15')
50			
49			(20)
48			(20)
47			(20)
46			(20)
45			(20)
44			(20)
± 3719			
43	15	25	(20)
42	15	24	(20)
41	15	25	(20)
40	20'	25'	(20)
+ 583	10' 8" ← 19	0	(20)
39	20'		(20)
38	13'		(20)
37	15'		(20)


19 MAY 1919  
 W. L. R. E. H.  
 100-57  
 100-58  
 100-59  
 100-60  
 100-61  
 100-62  
 100-63  
 100-64  
 100-65  
 100-66  
 100-67  
 100-68  
 100-69  
 100-70  
 100-71  
 100-72  
 100-73  
 100-74  
 100-75  
 100-76  
 100-77  
 100-78  
 100-79  
 100-80  
 100-81  
 100-82  
 100-83  
 100-84  
 100-85  
 100-86  
 100-87  
 100-88  
 100-89  
 100-90  
 100-91  
 100-92  
 100-93  
 100-94  
 100-95  
 100-96  
 100-97  
 100-98  
 100-99  
 100-100

CEMETERY DR.


County Home Dr

10' 8" ← 19  
 10" CIP 27'

SPK IN 14" MAPLE



PK SET '80

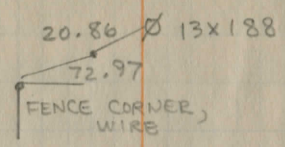

PK SET 180

122

63

+86<sup>13</sup>

62

61

60

+39<sup>20</sup>

59

58

57

56

+72<sup>10</sup>

55

54

53

52

24<sup>43</sup>

51

ANDERSON

HOPKINS

SPK P.O.T.

20'

20' ± 6.5'

SPK IN TANGENT

PK 178 POT

(15') SPK

(15')

(15')

(6')

(6')

(6')

(6')

(6')

(3')


(6')

(12')

(12')

(15')

123

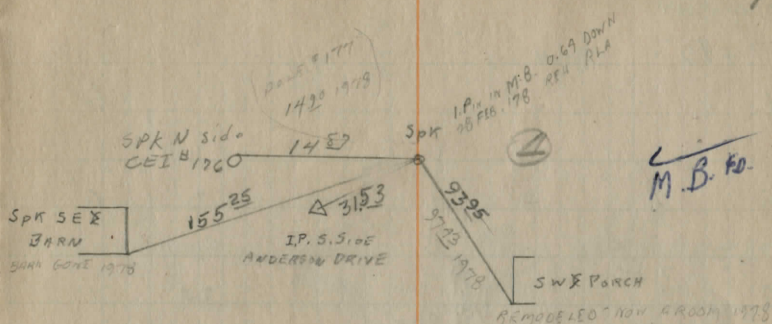

SPK NE. Root 20" MAPLE  
RESET MAR. '78 26'  
NE SIDE

PK 505, PK REFERENCED MAR. '78  
PK RLA

SPK No M.B.


NOT SO  
SPK NE. Root 24" MAPLE

20" CHERRY  
22' SPK W 34' MAR '78

SPK NE. S.W. 20" ASH  
RESET SPK W 23'

20" CHERRY  
GONE 1978

{ POLE 13x184 26.65' TO FACE  
NAIL IN 14" MAPLE 29.20  
PK 178 O.T. }

124  
+90° 30.4 →  14.4

76 (6')

75 (6')

74 ? 12°  
+18° DEF. L 0-11-20  
SPK  
179.48-20

20' (10')

73 25 25' (15')

72 BLIND CARP DRIVE 20' CARP DRIVE 20' (12405 18')

71 (15)

70 CULVERT 6' → ← 22.5 3x3 1/2 wide (15)

+26 (15)

69 (15)


68 (15)

67 (15)

66 (15)

65 (15)

64 (15)

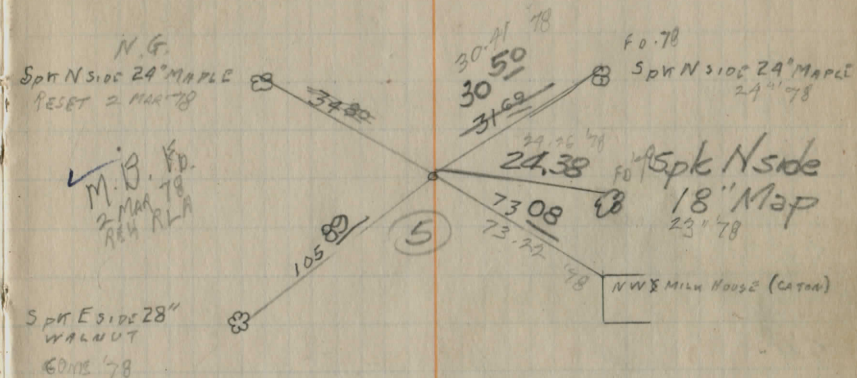


126

98

10

97

10

+64<sup>45</sup>21.5  11.3

96

10

95

(FWD STAIRS)

10

94

10

93

10

92

10

91

25'

(10')

90

(12')

+72<sup>95</sup>

SPIKE POT.

79

McDONALD DRIVE

(10')


78

(9')

77

DINO STAIR (3')

127

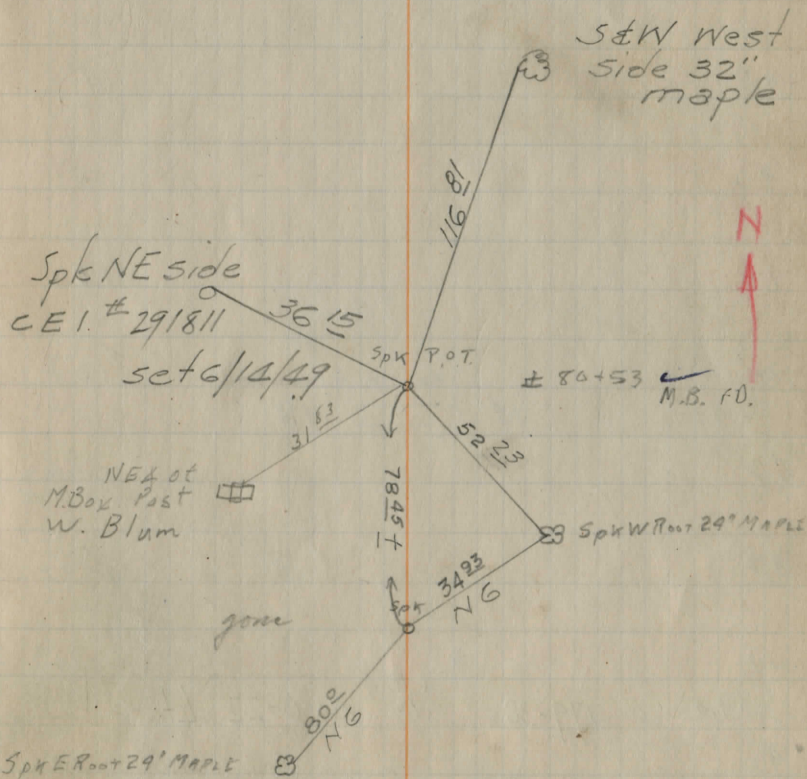

128

100

99

98

97

96

95

94

+91

93

92

91

+59.50

90

89

(15)

(15)

(15)

(15')

(15)

(15')

(12')


(10)


(10)

(10)

10'

(+15 - 12')


30' CP NEW 6-48  
15'  18'

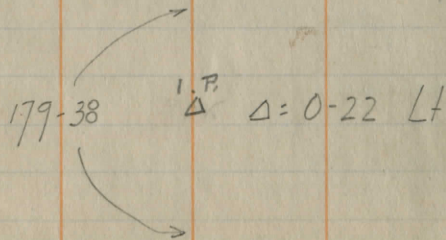

129

SPK W SIDE  
6" MAPLE 6' UP


✓ MB FB.

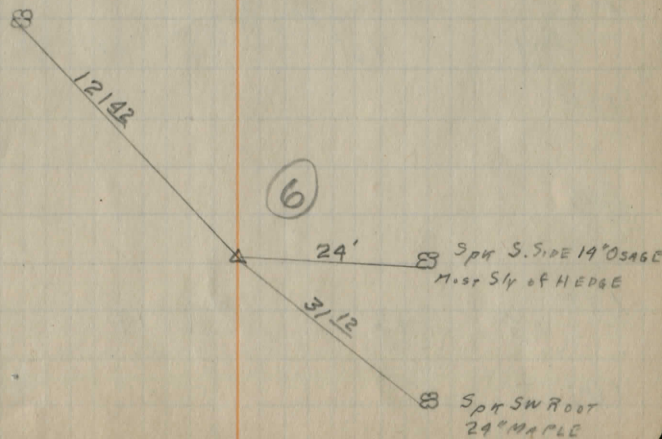

130

June 40  
S. STANCO

112  
+24

24" CIP CONCRETE  
15'  22'

(12')


111

(12')

110

(12')

109  
+73

33" x 33" <sup>20x20</sup>  
18'  18'

(12')

108

(12')

107

(12')

+02<sup>2</sup> POT.


106

(10')

105

(9')

+24

2" CIP CONCRETE  
16'  13' SEDGE BICK FALL

(15')


104

(15')

103

(15')

102  
+03.5

13'  19

(15')

101

131

SPK E SIDE 36" CHERRY

8708

SPK LAMB W SIDE  
CEI POLE 286741

3/1  
88

✓ M.B. FO.

I.P.

5505

SPK 2' UP W. SIDE  
CEI POLE 286742

⑦

132

JUNE 49

S. STONE

128 BUTTERNUT GREEN BRIDGE (15')

+7020

SPK POT

5450

1027

127 (15')

126 (15')

125 (15')

124 (15')

+668

POT

IP

123 (15')

122 (15')

121 (15')

120 (18')

119 (18')

118 (15')

117 (15')

+5762

POT

IP


116 (15')

115 15'

114 12'

113 12'

133

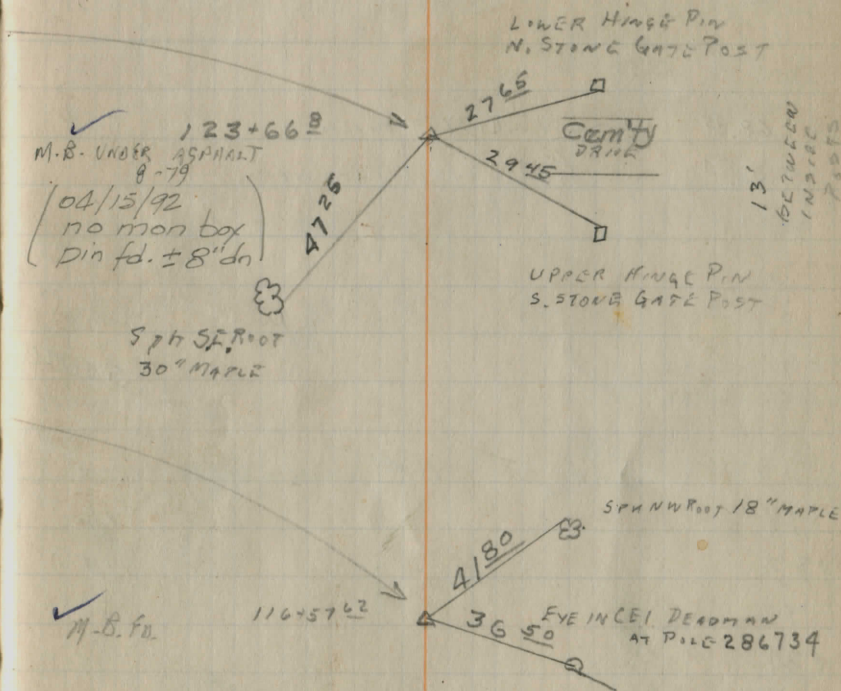

134

+ 68.<sup>45</sup>

± U.S. R-322 PAVEMENT

+ 58.<sup>34</sup>

S. EDGE U.S. R-322 PAVEMENT

+ 37.<sup>6</sup>

No MB Fa

134

133

132

131

130

128

same

I.P.

Δ

IS MARGIN R-322 R-O-W

(15')

(11')

(15')


(15')

(15')


(15')

(15')

135

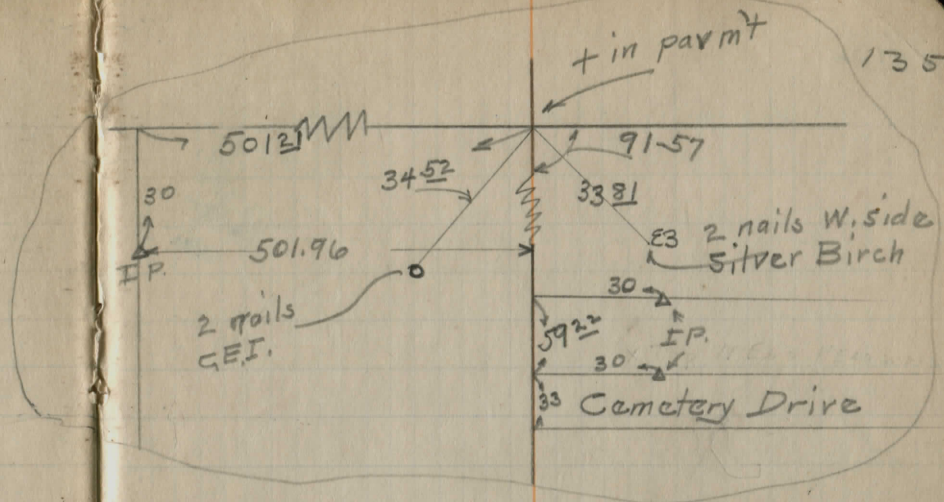Spt S Side CEI  
Pile # 43473

194.8

Spt NW Side  
C.T.C. # 759

56.06

+ Top N. end.  
Conc Hd'w'l

23.02

Spt NW Root  
12" Silver Maple

134 + 37.60

38.12

S.E. W. W. Side  
22" Silver Maple

136

137

138

H. Patterson  
E. Henschberger

RAVEN WOOD  
ROAD

5-19-1978


78° clear

P.O.T.


Tack & cap

$\Delta = 18^{\circ} 20' 15''$  Lt.

139

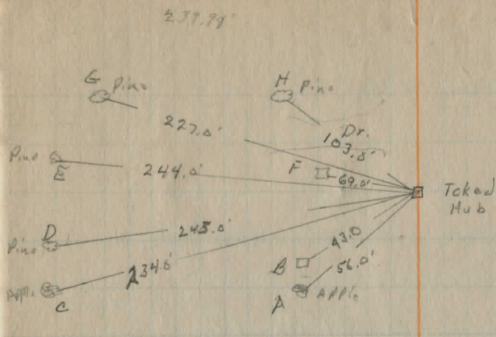

A =  $49^{\circ} 35'$   
B =  $49^{\circ} 39'$   
C =  $70^{\circ} 00'$   
D =  $85^{\circ} 28'$   
E =  $95^{\circ} 18'$   
F =  $147^{\circ} 42'$   
G =  $111^{\circ} 07'$   
H =  $142^{\circ} 03'$

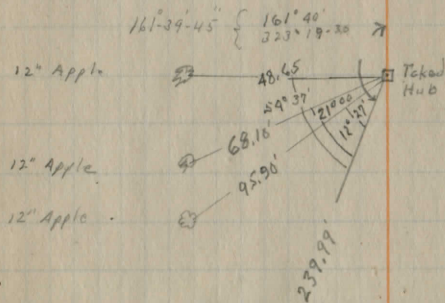

12" Apple

12" Apple

12" Apple

$161^{\circ} 39' 45''$  }  $161^{\circ} 40'$   
 $323^{\circ} 19' 30''$  }

Aquilla Rd.

COUNTY HOME  
DRIVE

239.99'

75°

89° 57'

15

15

140

H. Patterson  
G. Graham

5-25-78

Clear Hot 80°

$$\Delta = 89^{\circ} 02' \text{ Lt.}$$

$$\Delta = 08^{\circ} - 45' \text{ Rt.}$$

141

GEARGA COMM. HOSP. PROP. LINE

CONT. P.S. 142

± 494.84

90° 58'

30'

19 spk.

790.40'

179° 15'

Taked  
Hub

500.49'

142

H. Patterson  
G. Graham

5-26-78

Clear Hot 80°

143

Spk. S.E. side  
12" Maple

14.60'

Welfare  
Parking Lot

I. Pin

N 05° 53' 00" E

210.0'

75° ±

151'

75° 00' ± 40"

21.67'

225° 02'

Spk. N. side  
10" Ash

53'

688.59'

1251'

N 84° 07' 00" W

I. Pin

50'

$$\Delta = 75^{\circ} 28' 20''$$

Rt.

104° 32'

209° 03'

313 - 35'

104° 31' 40"

I. Pin

79'

30'

494.84'

19.57' ± 10"

20° 25' ± 10"

Hosp.  
P.O. 2

473.50'

A. Pin

144

145

146

147


148

149

150

7-15-80 WEN, WEF, GAM

151

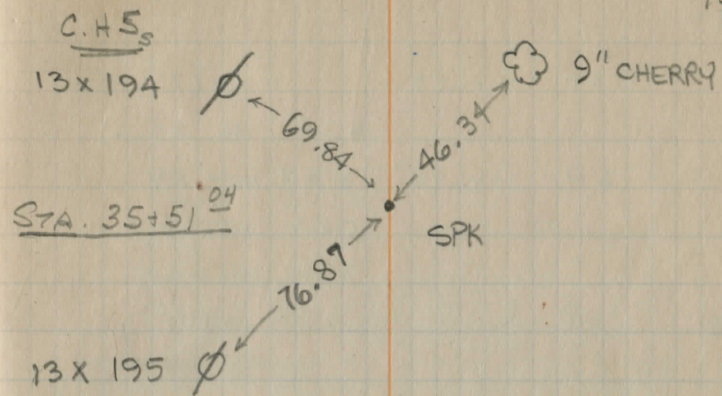

152

080 1067.54

1066.74

6.25

1061.29

2.41 1056.95

13.00

1054.54

5.12

1051.83 ✓

330

1053.65

61

in Pond




6.8

1050.1

153

1050.1  
3.60  
3.50

73+18

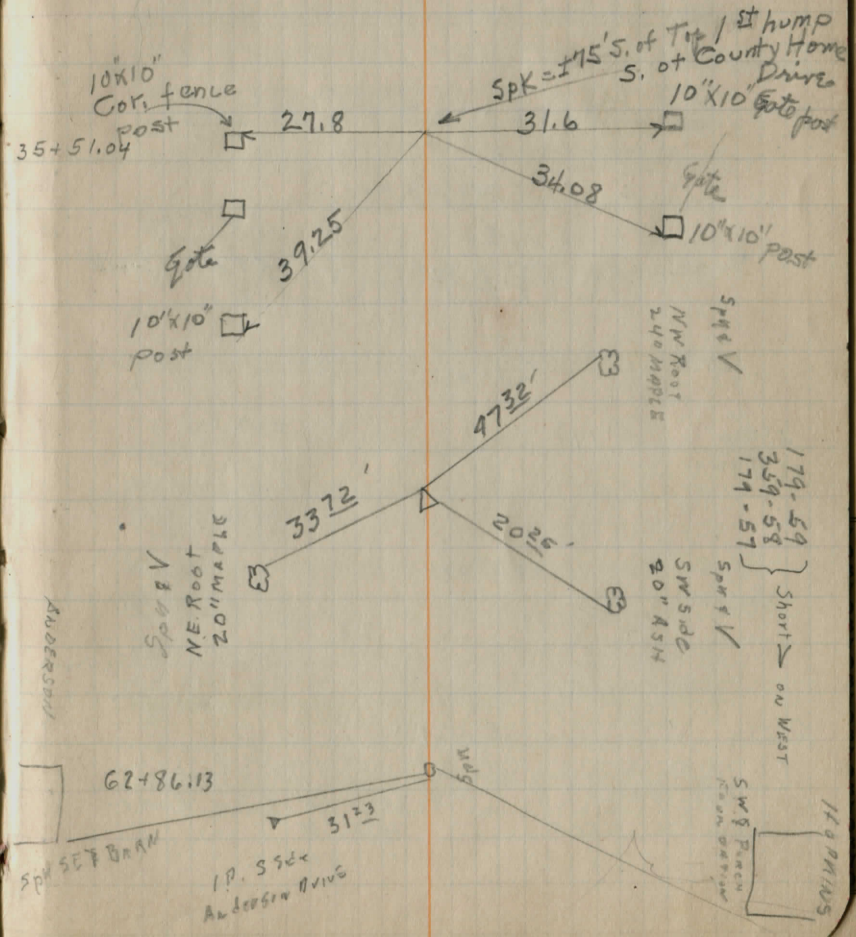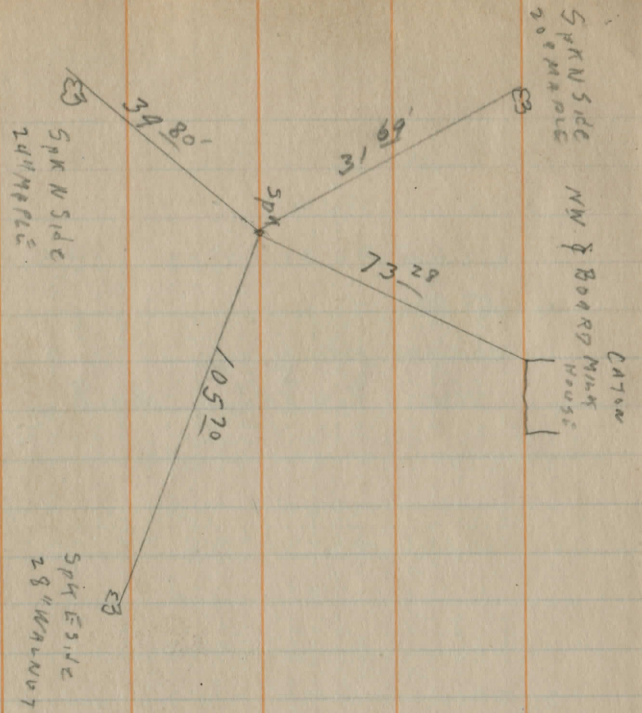

STAKE 1/2" x 3/4" 2x3 wide 7' EXT CONC

21' RWAY

112

20'

32°

NO TOUCH  
ADJUST  
Spring Creek

0' DAY

20' RWAY

Steep

26' Down

← 193

208 →

2x2 Box

1005

25'

17'

5' 1/2" HEAD

20' RWAY

Sheer

← 17'

23' →

18° C.P.P

Box ± 12' head

CATON

← 29 →

13' →

± 3x4 wide 7' EXT CONC

NO BOTTOM

SHARPER

N. WALL NEEDS REPAIR

N  
↑

## DIRECTIONS FOR USE OF TABLES

TABLE No. 1

Distance of slope stake from side or shoulder  
stake for any width roadway, slope 1% to 1.  
If ground is nearly level, the cut or fill at side  
let column and top row. If the number in body

## IMPROVED TABLES AND INFORMATION

TABLE No. 2

To find tangent and external for curve of  
any other degree, divide by degree of curve and  
add correction found in column of corrections.  
Degree of curve with a given  $L$  may be found  
by dividing tangent (or external) by  $L$  by  
given tangent (or external).  
The distance from a point on the tangent to  
the curve is very nearly the square of the tangent  
length divided by twice the radius.

57.67  
 22.56  
 10 0.00

## DIRECTIONS FOR USE OF TABLES

### TABLE No. 1.


Distance of slope stake from side or shoulder stake for any width roadway, slope  $1\frac{1}{2}$  to 1. If ground is nearly level, the cut or fill at side stake is located by the double entry method in left column and top row. The number in body of table in same row and column gives distance from side stake to slope stake. If ground is not level estimate the difference in elevation between the side stake and slope stake, lower target by this amount if cut, elevate if fill. Add this amount to cut or fill and find distance in table. Set up rod at this point, and line of sight should cut target. If it does not make the slight adjustment necessary.

### TABLE No. 9.

To find Tangent and External for curve of any other degree, divide by degree of curve and add correction found in column of corrections.

Degree of curve with a given I may be found by dividing tangent, (or external), opposite I by given tangent, (or external).

The distance from a point on the tangent to the curve is very nearly the square of the tangent length divided by twice the radius.



### TABLE II TRIGONOMETRIC FORMULÆ.

$$\angle A = \angle MOP \quad \angle B = \angle PON = \angle OPL$$

$$R = OB = c = 1$$

$$\sin A = \frac{a}{c} = \frac{a}{1} = a = \cos B = LP$$

$$\cos A = \frac{b}{c} = \frac{b}{1} = b = \sin B = OL$$

$$\tan A = \frac{a}{b} = \frac{MQ}{OM} = \frac{MQ}{1} = MQ = \cot B = MQ$$

$$\cot A = \frac{NT}{ON} = \frac{NT}{1} = NT = \tan B = NT$$

$$\sec A = \frac{OQ}{OM} = \frac{OQ}{1} = OQ = \csc B = OQ$$

$$\csc A = \frac{OT}{ON} = \frac{OT}{1} = OT = \sec B = OT$$

$$\text{vers } A = \frac{LM}{OP} = LM = \text{covers } B \#$$

$$\text{covers } A = \frac{OP - LP}{OP} = OP - LP = \text{vers } B$$

$$\text{exsec } A = PQ = \text{coexsec } B$$

$$\text{coexsec } A = PT = \text{exsec } B$$

$$\sin \frac{1}{2} A = \sqrt{\frac{1 - \cos A}{2}} \quad \cos \frac{1}{2} A = \sqrt{\frac{1 + \cos A}{2}}$$

$$\sin 2A = 2 \sin A \cos A \quad \cos 2A = \cos^2 A - \sin^2 A$$

$$\text{Law of Lines} \quad \frac{\sin A}{a} = \frac{\sin B}{B} = \frac{\sin C}{C}$$

$$\text{Law of Cosines} \quad c^2 = a^2 + b^2 - 2ab \cos C$$

$$\text{Law of Tangents} \quad \frac{a+b}{a-b} = \frac{\tan \frac{1}{2}(A+B)}{\tan \frac{1}{2}(A-B)}$$

TABLE II—Continued  
TRIGONOMETRIC FORMULAE (continued)

In any triangle:

Given a, b, C; to find c, B, A.

Use Law of Lines.

Given A, B, c; to find a, b, C.

Use Law of Lines.

Given a, b, c; to find A, B, C.

$$\text{Let } \frac{a+b+c}{2} = s, \sqrt{\frac{(s-a)(s-b)(s-c)}{s}} = r$$

$$\cos \frac{1}{2} A = \sqrt{\frac{s(s-a)}{bc}}$$

$$\tan \frac{1}{2} A = \frac{r}{s-a}$$

$$\tan \frac{1}{2} B = \frac{r}{s-b}$$

$$\tan \frac{1}{2} C = \frac{r}{s-c}$$

Area of a triangle:

$$\text{Area} = \frac{1}{2} ab \sin C$$

$$\text{Area} = \sqrt{s(s-a)(s-b)(s-c)}$$

PRISMOIDAL FORMULA.

$$\text{Vol.} = \frac{h}{6} (B+b+4M)$$

h = altitude; b, B = bases; M = midsection

TABLE III  
INCHES AND FRACTIONS OF AN INCH IN DECIMALS OF A FOOT

	0	1	2	3	4	5	6	7	8	9	10	11
$\frac{1}{16}$	.0052	.0885	.1719	.2552	.3385	.4219	.5052	.5885	.6719	.7552	.8385	.9219
$\frac{1}{8}$	.0104	.0938	.1771	.2604	.3438	.4271	.5104	.5938	.6771	.7604	.8438	.9271
$\frac{3}{16}$	.0156	.0990	.1823	.2656	.3490	.4323	.5156	.5990	.6823	.7656	.8490	.9323
$\frac{1}{4}$	.0208	.1042	.1875	.2708	.3542	.4375	.5208	.6042	.6875	.7708	.8542	.9375
$\frac{5}{16}$	.0260	.1094	.1927	.2760	.3594	.4427	.5260	.6094	.6927	.7760	.8594	.9427
$\frac{3}{8}$	.0313	.1146	.1979	.2813	.3646	.4479	.5313	.6146	.6979	.7813	.8646	.9479
$\frac{7}{16}$	.0365	.1198	.2031	.2865	.3698	.4531	.5365	.6198	.7031	.7865	.8698	.9531
$\frac{1}{2}$	.0417	.1250	.2083	.2917	.3750	.4583	.5417	.6250	.7083	.7917	.8750	.9583
$\frac{9}{16}$	.0469	.1302	.2135	.2969	.3803	.4635	.5469	.6302	.7135	.7969	.8802	.9635
$\frac{5}{8}$	.0521	.1354	.2188	.3021	.3854	.4688	.5521	.6354	.7188	.8021	.8854	.9688
$\frac{11}{16}$	.0573	.1406	.2240	.3073	.3906	.4740	.5573	.6406	.7240	.8073	.8906	.9740
$\frac{3}{4}$	.0625	.1458	.2292	.3125	.3958	.4792	.5625	.6458	.7292	.8125	.8958	.9792
$\frac{13}{16}$	.0677	.1510	.2344	.3177	.4010	.4844	.5677	.6510	.7344	.8177	.9010	.9844
$\frac{7}{8}$	.0729	.1563	.2396	.3229	.4063	.4896	.5729	.6563	.7396	.8229	.9063	.9896
$\frac{15}{16}$	.0781	.1615	.2448	.3281	.4115	.4948	.5781	.6615	.7448	.8281	.9115	.9948
1	.0833	.1667	.2500	.3333	.4167	.5000	.5833	.6667	.7500	.8333	.9167	1.0000
	0	1	2	3	4	5	6	7	8	9	10	11

TABLE IV  
USEFUL RELATIONS.

Lineal feet	×.00019	= miles
Lineal yards	×.0006	= miles
Square inches	×.007	= square feet
Square feet	×.111	= square yards
Square yards	×.0002067	= acres
Acres	×4840	= square yards
Cubic inches	×.00058	= cubic feet
Cubic feet	×.03704	= cubic yards
Links	×.22	= yards
Links	×.66	= feet
Feet	×1.5	= links

$$360^\circ = 21600' = 1296000''$$

$$\text{Radius} = \text{arc of } 57.2957790^\circ$$

$$\text{Arc of } 1^\circ (\text{radius} = 1) = .017453292$$

$$\text{Arc of } 1' (\text{radius} = 1) = .000290888$$

$$\text{Arc of } 1'' (\text{radius} = 1) = .000004848$$

$$\pi = 3.141592654 \quad \sqrt{\frac{1}{4}} = 0.564190$$

$$\frac{\pi}{4} = 0.785398163 \quad \sqrt[3]{\frac{6}{\pi}} = 1.240700982$$

$$\frac{\pi}{6} = 0.523598776 \quad \pi^2 = 9.869604401$$

$$\sqrt{\frac{4}{\pi}} = 1.128379167 \quad \frac{1}{\pi^2} = 0.101321184$$

$$\frac{\pi}{6} = 0.523598776 \quad \sqrt{\pi} = 1.772453851$$

$$\frac{4\pi}{3} = 4.188790205 \quad \frac{1}{\pi} = 0.3183099$$

Curvature of Earth's surface = about 0.7 feet in 1 mile

Curvature in feet = 0.667 (Dist. in miles)<sup>2</sup>

Difference between arc and chord length, 0.05 feet in 11½ miles

$$\text{Probable error of a single observation} = 0.6754 \sqrt{\frac{M v^2}{n-1}}$$

Error in chaining of 0.01 feet in 100 feet:

Due to—

1. Length of tape error of 0.01 feet
2. Alignment. One end 1.4 feet out of line
3. Sag of tape at centre of 0.61 feet.
4. Temperature difference of 15°
5. Difference of pull of 15 lbs.

STADIA REDUCTION FORMULÆ.

$$\text{Horizontal Distance} = R - R \sin^2 a + C \cos a$$

$$\text{Vertical Distance} = R \frac{1}{2} \sin 2a + C \sin a$$

$$R = \text{Reading} \times \frac{\text{distance from Object glass to cross hairs}}{\text{distance between cross hairs}}$$

C = distance from Object glass to cross hairs + distance from Object glass to center of instrument.

a = angle of elevation for mid Reading




TABLE V  
CURVE FORMULAE FOR SIMPLE CURVES  
COMPILED BY J. CALVIN LOCKE, C.E.

- (1)  $c = \sqrt{2Ra}$  (2)  $c = \sqrt{a^2 + b^2}$   
 (3)  $c = \sqrt{2R(R - \sqrt{(R+b)(R-b)})} = \sqrt{2R(R - \sqrt{R^2 - b^2})}$   
 (4)  $c = 2\sqrt{m(2R - m)}$   
 (5)  $c = 2R \sin \frac{1}{2} I$  (6)  $c = 2T \cos \frac{1}{2} I$   
 (7)  $e = R \operatorname{exsec} \frac{1}{2} I$   
 (8)  $e = R \tan \frac{1}{2} I \tan \frac{1}{4} I$  (9)  $e = T \tan \frac{1}{4} I$   
 (10)  $b = \sqrt{a(2R - a)}$   
 (11)  $b = \sqrt{\left(c + \frac{c^2}{2R}\right)\left(c - \frac{c^2}{2R}\right)} = \sqrt{c^2 - \frac{c^4}{4R^2}}$   
 (12)  $b = R \sin I$  (13)  $b = a \cot \frac{1}{2} I$   
 (14)  $R = \frac{a^2 + b^2}{2a} = \frac{c^2}{2a}$  (15)  $R = \frac{d^2}{2m} = \frac{c^2 + 4m^2}{8m}$   
 (16)  $d = \sqrt{R(2R - \sqrt{(2R+c)(2R-c)})} = \sqrt{R(2R - \sqrt{4R^2 - c^2})}$   
 (17)  $d = \sqrt{2Rm}$  (18)  $d = 2R \sin \frac{1}{4} I$  (19)  $m = \frac{d^2}{2R}$   
 (20)  $m = R \mp \sqrt{\left(R + \frac{c}{2}\right)\left(R - \frac{c}{2}\right)} = R \mp \sqrt{R^2 - \frac{c^2}{4}}$   
 (21)  $m = R \operatorname{vers} \frac{1}{2} I$  (22)  $m = R \sin \frac{1}{2} I \tan \frac{1}{4} I$  (23)  $m = \frac{1}{2} c \tan \frac{1}{4} I$   
 (24)  $a = \frac{c^2}{2R}$  (25)  $a = R - \sqrt{(R+b)(R-b)} = R - \sqrt{R^2 - b^2}$   
 (26)  $a = 2R(\sin^2 \frac{1}{2} I)^2$  (27)  $a = R \operatorname{vers} I$  (28)  $a = R \sin I \tan \frac{1}{2} I$   
 (29)  $a = b \tan \frac{1}{2} I$  (30)  $a = T \sin I$  (31)  $T = R \tan \frac{1}{2} I$   
 (32)  $I = \frac{L}{R} \times 57.295780$  (33)  $R = \frac{L}{I} \times 57.295780$   
 (34)  $L = IR \times 0.01745329$  (35)  $L = \frac{8d - c}{3}$   
 (36)  $\text{Area Seg.} = \frac{LR - R^2 \sin I}{2} = \frac{LR - Rb}{2}$

TABLE VI  
SINES, COSINES, TANGENTS, COTANGENTS

0	10'	20'	30'	40'	50'	60'	70'	80'	90'
0	0000	0000	0029	0058	0087	0116	0145	0175	0204
1	175	0175	0204	0233	0262	291	320	350	380
2	349	349	378	407	436	465	494	524	553
3	523	524	552	581	610	640	669	698	727
4	698	699	727	756	785	814	843	872	901
5	872	875	901	929	958	987	1016	1045	1074
6	1045	1051	1074	1080	1103	1132	1161	1190	1219
7	219	228	248	257	279	305	334	363	392
8	392	405	421	435	449	465	478	495	507
9	564	584	593	614	622	644	650	673	679
10	736	763	765	793	794	823	822	853	851
11	908	944	937	974	965	2004	994	2035	2022
12	2079	2126	2108	2156	2136	186	2164	217	193
13	250	309	278	339	306	370	334	401	363
14	419	493	447	524	476	555	504	586	532
15	588	679	616	711	644	742	672	773	700
16	756	867	784	899	812	931	840	962	868
17	924	3057	952	3089	939	3121	3007	3153	3035
18	3090	249	3118	281	3145	314	173	346	201
19	256	443	283	476	311	508	338	541	365
20	420	640	448	673	475	706	502	739	529
21	584	839	611	872	638	906	665	939	692
22	746	4040	773	4074	800	4108	827	4142	854
23	907	245	934	279	961	314	987	348	4014
24	4067	452	4094	487	4120	522	4147	557	173
25	226	663	253	699	279	734	305	770	331
26	384	877	410	913	436	950	462	986	488
27	540	5095	566	5132	592	5169	617	5206	643
28	695	317	720	354	746	392	772	430	797
29	848	543	874	581	899	619	924	658	950
30	5000	774	5025	5812	5050	851	5075	890	5100
31	150	6009	175	6048	200	6088	225	6128	250
32	299	249	324	289	348	330	5373	371	398
33	446	494	471	536	495	577	519	619	544
34	592	745	616	787	640	830	664	873	688
35	736	7002	760	7046	783	7089	807	7133	831
36	878	265	901	310	925	355	948	400	972
37	6018	536	6041	581	6065	627	6088	673	6111
38	157	813	180	860	202	907	225	954	248
39	293	8098	316	8146	338	8195	361	8243	383
40	428	391	450	441	472	491	494	541	517
41	561	693	583	744	604	796	626	847	648
42	691	9004	713	9057	734	9110	756	9163	777
43	820	325	841	380	862	435	884	490	905
44	947	657	967	713	988	770	7009	827	7030
45	7071	1.0000	7092	1.0058	7112	1.0117	133	1.0176	153
46	60	60'	50'	40'	30'	20'	10'	0	0
deg.	cos	cot	cos	cot	cos	cot	cos	cot	cos
deg.	cos	cot	cos	cot	cos	cot	cos	cot	cos

TABLE VI (continued)  
SINES, COSINES, TANGENTS, COTANGENTS (continued)

deg.	sin 0'	tan 0'	sin 10'	tan 10'	sin 20'	tan 20'	sin 30'	tan 30'	sin 40'	tan 40'	sin 50'	tan 50'	sec
46	7193	1.0355	7214	1.0416	7234	1.0477	7254	1.0533	7274	1.0599	7294	1.0661	43
47	314	.0724	333	.0786	353	.0850	373	.0913	392	.0977	412	.1041	42
48	431	.1106	451	.1171	470	.1237	490	.1303	509	.1369	528	.1436	41
49	547	.1504	566	.1571	585	.1640	604	.1708	623	.1778	642	.1847	40
50	660	1.1918	7679	1.1988	7698	1.2059	7716	1.2131	7735	1.2203	7753	1.2276	39
51	771	.2349	790	.2423	808	.2497	826	.2572	844	.2647	862	.2723	38
52	880	.2799	898	.2876	916	.2954	934	.3032	951	.3111	969	.3190	37
53	986	.3270	8004	.3351	8021	.3452	8039	.3514	8056	.3597	8073	.3680	36
54	8090	.3764	107	.3848	124	.3934	141	.4019	158	.4106	175	.4193	35
55	192	.4281	208	.4370	225	.4460	241	.4550	258	.4641	274	.4733	34
56	290	.4826	307	.4919	323	.5013	339	.5108	355	.5204	371	.5301	33
57	387	.5399	403	.5497	418	.5597	434	.5697	450	.5798	465	.5900	32
58	480	.6003	496	.6107	511	.6212	526	.6319	542	.6426	557	.6534	31
59	572	.6643	587	.6753	601	.6864	616	.6977	631	.7090	646	.7205	30
60	660	1.7321	8675	1.7437	8689	1.7556	8704	1.7675	8718	1.7797	8732	1.7917	29
61	746	.8040	760	.8165	774	.8291	788	.8418	802	.8546	816	.8676	28
62	829	.8807	843	.8940	857	.9074	870	.9210	884	.9347	897	.9486	27
63	910	.9626	923	.9768	936	.9912	949	2.0057	962	2.0204	975	2.0353	26
64	988	2.0503	9001	2.0655	9013	2.0809	9026	.0965	9038	.1123	9051	.1283	25
65	9063	.1445	075	.1609	088	.1775	100	.1943	112	.2113	124	.2286	24
66	135	.2460	147	.2637	159	.2817	171	.2998	182	.3183	194	.3369	23
67	205	.3559	216	.3750	228	.3945	239	.4142	250	.4342	261	.4545	22
68	272	.4751	283	.4960	293	.5172	304	.5386	315	.5605	325	.5826	21
69	336	.6051	346	.6279	356	.6511	367	.6746	377	.6985	387	.7228	20
70	397	2.7475	9407	2.7725	9417	2.7980	9426	2.8239	9436	2.8502	9446	2.8770	19
71	455	.9042	465	.9319	474	.9600	483	.9887	492	3.0178	502	3.0475	18
72	511	3.0777	520	3.1084	528	3.1397	537	3.1716	546	.2041	555	.2371	17
73	563	.2709	572	.3052	580	.3402	588	.3759	596	.4124	605	.4495	16
74	613	.4874	621	.5261	628	.5656	636	.6059	644	.6470	652	.6891	15
75	659	.7321	667	.7760	674	.8208	681	.8657	689	.9136	696	.9617	14
76	703	4.0108	710	4.0611	717	4.1126	724	4.1653	730	4.2193	737	4.2747	13
77	744	.3315	750	.3897	757	.4494	763	.5107	769	.5736	775	.6382	12
78	781	.7046	787	.7729	793	.8430	799	.9152	805	.9894	811	5.0658	11
79	816	.1446	822	5.2257	827	5.3093	833	5.3955	838	5.4845	843	.5764	10
80	9848	5.6713	9853	5.7694	9858	5.8708	9863	5.9758	9868	6.0844	9872	6.1970	9
81	877	6.3138	881	6.4348	886	6.5606	890	6.6912	894	.8269	899	.9682	8
82	903	7.1154	907	7.2687	911	7.4287	914	7.5958	918	7.7704	922	7.9530	7
83	925	8.1443	929	8.3450	932	8.5555	936	8.7769	939	9.0098	942	9.2553	6
84	945	9.5144	948	9.7882	951	10.078	954	10.385	957	10.711	959	11.059	5
85	962	11.4300	964	11.826	967	12.250	969	12.706	971	13.197	974	13.727	4
86	976	14.300	978	14.924	980	15.605	981	16.350	983	17.169	985	18.075	3
87	986	19.081	988	20.206	989	21.470	990	22.903	992	24.542	993	26.432	2
88	994	28.636	9995	31.242	9996	34.368	997	38.189	997	42.964	9998	49.104	1
89	9998	57.290	9999	68.750	9999	85.940	9999	114.58	1.000	171.88	1.000	343.77	0
deg.	60'	cos	50'	cos	40'	cos	30'	cos	20'	cos	10'	cos	deg.

TABLE VII  
RODS IN FEET AND INCHES

Rods	Feet Inches	Rods	Feet Inches	Rods	Feet Inches	Rods	Feet Inches	Rods	Feet Inches
1	16-6	21	346-6	41	676-6	61	1006-6	81	1336-6
2	33-0	22	363-0	42	693-0	62	1023-0	82	1353-0
3	49-6	23	379-6	43	709-6	63	1039-6	83	1369-6
4	66-0	24	396-0	44	726-0	64	1056-0	84	1386-0
5	82-6	25	412-6	45	742-6	65	1072-6	85	1402-6
6	99-0	26	429-0	46	759-0	66	1089-0	86	1419-0
7	115-6	27	445-6	47	775-6	67	1105-6	87	1435-6
8	132-0	28	462-0	48	792-0	68	1122-0	88	1452-0
9	148-6	29	478-6	49	808-6	69	1138-6	89	1468-6
10	165-0	30	495-0	50	825-0	70	1155-0	90	1485-0
11	181-6	31	511-6	51	841-6	71	1171-6	91	1501-6
12	198-0	32	528-0	52	858-0	72	1188-0	92	1518-0
13	214-6	33	544-6	53	874-6	73	1204-6	93	1534-6
14	231-0	34	561-0	54	891-0	74	1221-0	94	1551-0
15	247-6	35	577-6	55	907-6	75	1237-6	95	1567-6
16	264-0	36	594-0	56	924-0	76	1254-0	96	1584-0
17	280-6	37	610-6	57	940-6	77	1270-6	97	1600-6
18	297-0	38	627-0	58	957-0	78	1287-0	98	1617-0
19	313-6	39	643-6	59	973-6	79	1303-6	99	1633-6
20	330-0	40	660-0	60	990-0	80	1320-0	100	1650-0

TABLE VIII  
LINKS IN FEET AND INCHES

Links	Feet Inches	Links	Feet Inches	Links	Feet Inches	Links	Feet Inches	Links	Feet Inches
1	0-7.92	18	11-10.56	35	23-1.20	52	34-3.84	69	45-6.48
2	1-3.84	19	12-6.48	36	23-9.12	53	34-11.76	70	46-2.40
3	1-11.76	20	13-2.40	37	24-5.04	54	35-7.68	71	46-10.32
4	2-7.68	21	13-10.32	38	25-0.96	55	36-3.60	72	47-6.24
5	3-3.60	22	14-6.24	39	25-8.88	56	36-11.52	73	48-2.16
6	3-11.52	23	15-2.16	40	26-4.80	57	37-7.44	74	48-10.08
7	4-7.44	24	15-10.08	41	27-0.72	58	38-3.36	75	49-6.00
8	5-3.36	25	16-6.00	42	27-8.64	59	38-11.28	76	50-1.92
9	5-11.28	26	17-1.92	43	28-4.56	60	39-7.20	77	50-9.84
10	6-7.20	27	17-9.84	44	29-0.48	61	40-3.12	78	51-5.76
11	7-3.12	28	18-5.76	45	29-8.40	62	40-11.04	79	52-1.68
12	7-11.04	29	19-1.68	46	30-4.32	63	41-6.96	80	52-9.60
13	8-6.96	30	19-9.60	47	31-0.24	64	42-2.88	81	53-5.52
14	9-2.88	31	20-5.52	48	31-8.16	65	42-10.80	82	54-1.44
15	9-10.80	32	21-1.44	49	32-4.08	66	43-6.72	83	54-9.36
16	10-6.72	33	21-9.36	50	33-0.00	67	44-2.64	84	55-5.28
17	11-2.64	34	22-5.28	51	33-7.92	68	44-10.56	85	56-1.20

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=10°	I	T	E	I=20°	I	T	E	I=30°
1°	50.00	.218	+	11°	551.70	26.500	+	21°	1061.9	97.577	+
10'	58.34	.297	5° C.	10'	560.11	27.313	5° C.	10'	1070.6	99.155	5° C.
20'	66.67	.388	T	20'	568.53	28.137	T	20'	1079.2	100.75	T
30'	75.01	.491	E	30'	576.95	28.974	E	30'	1087.8	102.35	E
40'	83.34	.606	.03	40'	585.36	29.824	.06	40'	1096.4	103.97	.10
50'	91.68	.733	.0E	50'	593.79	30.686	.0E	50'	1105.1	105.60	.10E
2°	100.01	.873	.001	12°	602.21	31.561	.006	22°	1113.7	107.24	.013
10'	108.35	1.024		10'	610.64	32.447		10'	1122.4	108.90	
20'	116.68	1.188		20'	619.07	33.347		20'	1131.0	110.57	
30'	125.02	1.364		30'	627.50	34.259		30'	1139.7	112.25	
40'	133.36	1.552		40'	635.93	35.183		40'	1148.4	113.95	
50'	141.70	1.752		50'	644.37	36.120		50'	1157.0	115.66	
3°	150.04	1.964	10° C.	13°	652.81	37.070	10° C.	23°	1165.7	117.38	10° C.
10'	158.38	2.188	T	10'	661.25	38.031	T	10'	1174.4	119.12	T
20'	166.72	2.425	.06	20'	669.70	39.006	.13	20'	1183.1	120.87	.19
30'	175.06	2.674	.003	30'	678.15	39.993	.011	30'	1191.8	122.63	.025
40'	183.40	2.934		40'	686.60	40.992		40'	1200.5	124.41	
50'	191.74	3.207	E	50'	695.06	42.004	E	50'	1209.2	126.20	E
4°	200.08	3.492		14°	703.51	43.029		24°	1217.9	128.00	
10'	208.43	3.790		10'	711.97	44.066		10'	1226.6	129.82	
20'	216.77	4.099		20'	720.44	45.116		20'	1235.3	131.65	
30'	225.12	4.421		30'	728.90	46.178		30'	1244.0	133.50	
40'	233.47	4.755		40'	737.37	47.253		40'	1252.8	135.35	
50'	241.81	5.100	15° C.	50'	745.85	48.341	15° C.	50'	1261.5	137.23	15° C.
5°	250.16	5.459	T	15°	754.32	49.441	T	25°	1270.2	139.11	T
10'	258.51	5.829	.09	10'	762.80	50.554	.19	10'	1279.0	141.01	.29
20'	266.86	6.211	E	20'	771.29	51.679	E	20'	1287.7	142.93	E
30'	275.21	6.606	.004	30'	779.77	52.818	.017	30'	1296.5	144.85	.038
40'	283.57	7.013		40'	788.26	53.969		40'	1305.3	146.79	
50'	291.92	7.432		50'	796.75	55.132		50'	1314.0	148.75	
6°	300.28	7.863		16°	805.25	56.309		26°	1322.8	150.71	
10'	308.64	8.307		10'	813.75	57.498		10'	1331.6	152.69	
20'	316.99	8.762		20'	822.25	58.699		20'	1340.4	154.69	
30'	325.35	9.230		30'	830.76	59.914		30'	1349.2	156.70	
40'	333.71	9.710	20° C.	40'	839.27	61.141	20° C.	40'	1358.0	158.72	20° C.
50'	342.08	10.202	T	50'	847.78	62.381	T	50'	1366.8	160.76	T
7°	350.44	10.707	.13	17°	856.30	63.634	.26	27°	1375.6	162.81	.39
10'	358.81	11.224	E	10'	864.82	64.900	E	10'	1384.4	164.86	E
20'	367.17	11.753	.006	20'	873.35	66.178	.022	20'	1393.2	166.95	.051
30'	375.54	12.294		30'	881.88	67.470		30'	1402.0	169.04	
40'	383.91	12.847		40'	890.41	68.774		40'	1410.9	171.15	
50'	392.28	13.413		50'	898.95	70.091		50'	1419.7	173.27	
8°	400.66	13.991		18°	907.49	71.421		28°	1428.6	175.41	
10'	409.03	14.582		10'	916.03	72.764		10'	1437.4	177.55	
20'	417.41	15.184	25° C.	20'	924.58	74.119	25° C.	20'	1446.3	179.72	25° C.
30'	425.79	15.799	T	30'	933.13	75.488	T	30'	1455.1	181.89	T
40'	434.17	16.426	.16	40'	941.69	76.869	.32	40'	1464.0	184.08	.49
50'	442.55	17.065	E	50'	950.25	78.264	E	50'	1472.9	186.29	E
9°	450.93	17.717	.007	19°	958.81	79.671	.028	29°	1481.8	188.51	.065
10'	459.32	18.381		10'	967.38	81.092		10'	1490.7	190.74	
20'	467.71	19.058		20'	975.96	82.525		20'	1499.6	192.99	
30'	476.10	19.746		30'	984.53	83.972		30'	1508.5	195.25	
40'	484.49	20.447		40'	993.12	85.431		40'	1517.4	197.53	
50'	492.88	21.161		50'	1001.7	86.904		50'	1526.3	199.82	
10°	501.28	21.887	30° C.	20°	1010.3	88.389	30° C.	30°	1535.3	202.12	30° C.
10'	509.68	22.624	T	10'	1018.9	89.888	T	10'	1544.2	204.44	T
20'	518.08	23.375	.19	20'	1027.5	91.399	.39	20'	1553.1	206.77	.59
30'	526.48	24.138	E	30'	1036.1	92.924	E	30'	1562.1	209.12	E
40'	534.89	24.913		40'	1044.7	94.462		40'	1571.0	211.48	
50'	543.29	25.700	.008	50'	1053.3	96.013	.034	50'	1580.0	213.86	.078

T = R tan ½ I

E = R exsec ½ I

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=40°	I	T	E	I=50°	I	T	E	I=60°
31°	1589.0	216.3	+	41°	2142.2	387.4	+	51°	2732.9	618.4	+
10'	1598.0	218.7	5° C.	10'	2151.7	390.7	5° C.	10'	2743.1	622.8	5° C.
20'	1606.9	221.1	T	20'	2161.2	394.1	T	20'	2753.4	627.2	T
30'	1615.9	223.5	.13	30'	2170.8	397.4	.17	30'	2763.7	631.7	.21
40'	1624.9	226.0	E	40'	2180.3	400.8	E	40'	2773.9	636.2	E
50'	1633.9	228.4	.023	50'	2189.9	404.2	.037	50'	2784.2	640.7	.056
32°	1643.0	230.9		42°	2199.4	407.6		52°	2794.5	645.2	
10'	1652.0	233.4		10'	2209.0	411.1		10'	2804.9	649.7	
20'	1661.0	235.9		20'	2218.6	414.5		20'	2815.2	654.3	
30'	1670.0	238.4		30'	2228.1	418.0		30'	2825.6	658.8	
40'	1679.1	241.0		40'	2237.7	421.4		40'	2835.9	663.4	
50'	1688.1	243.5	10° C.	50'	2247.3	425.0	10° C.	50'	2846.3	668.0	10° C.
33°	1697.2	246.1	T	43°	2257.0	428.5	T	53°	2856.7	672.7	T
10'	1706.3	248.7	.26	10'	2266.6	432.0	.34	10'	2867.1	677.3	.42
20'	1715.3	251.3	E	20'	2276.2	435.6	E	20'	2877.5	682.0	E
30'	1724.4	253.9	.046	30'	2285.9	439.2	.075	30'	2888.0	686.7	.112
40'	1733.5	256.5		40'	2295.6	442.8		40'	2898.4	691.4	
50'	1742.6	259.1		50'	2305.2	446.4		50'	2908.9	696.1	
34°	1751.7	261.8		44°	2314.9	450.0		54°	2919.4	700.9	
10'	1760.8	264.5		10'	2324.6	453.6		10'	2929.9	705.7	
20'	1770.0	267.2		20'	2334.3	457.3		20'	2940.4	710.5	
30'	1779.1	269.9		30'	2344.1	461.0		30'	2951.0	715.3	
40'	1788.2	272.6		40'	2353.8	464.6		40'	2961.5	720.1	
50'	1797.4	275.3	15° C.	50'	2363.5	468.4	15° C.	50'	2972.1	725.0	15° C.
35°	1806.6	278.1	T	45°	2373.3	472.1	T	55°	2982.7	729.9	T
10'	1815.7	280.8	.40	10'	2383.1	475.8	.51	10'	2993.3	734.8	.63
20'	1824.9	283.6	E	20'	2392.8	479.6	E	20'	3003.9	739.7	E
30'	1834.1	286.4	.070	30'	2402.6	483.4	.116	30'	3014.5	744.6	.168
40'	1843.3	289.2		40'	2412.4	487.2		40'	3025.2	749.6	
50'	1852.5	292.0		50'	2422.3	491.0		50'	3035.8	754.6	
36°	1861.7	294.9		46°	2432.1	494.8		56°	3046.5	759.6	
10'	1870.9	297.7		10'	2441.9	498.7		10'	3057.2	764.6	
20'	1880.1	300.6		20'	2451.8	502.5		20'	3067.9	769.7	
30'	1889.4	303.5	20° C.	30'	2461.7	506.4	20° C.	30'	3078.7	774.7	20° C.
40'	1898.6	306.4	T	40'	2471.5	510.3	T	40'	3089.4	779.8	T
50'	1907.9	309.3	.53	50'	2481.4	514.3	.68	50'	3100.2	784.9	.84
37°	1917.1	312.2	E	47°	2491.3	518.2	E	57°	3110.9	790.1	E
10'	1926.4	315.2	.093	10'	2501.2	522.2	.151	10'	3121.7	795.2	.225
20'	1935.7	318.1		20'	2511.2	526.1		20'	3132.6	800.4	
30'	1945.0	321.1		30'	2521.1	530.1		30'	3143.4	805.6	
40'	1954.3	324.1		40'	2531.1	534.2		40'	3154.2	810.9	
50'	1963.6	327.1		50'	2541.0	538.2		50'	3165.1	816.1	
38°	1972.9	330.2		48°	2551.0	542.2		58°	3176.0	821.4	
10'	1982.2	333.2	25° C.	10'	2561.0	546.3	25° C.	10'	3186.9	826.7	25° C.
20'	1991.5	336.3	T	20'	2571.0	550.4	T	20'	3197.8	832.0	T
30'	2000.9	339.3	.67	30'	2581.0	554.5	.85	30'	3208.8	837.3	.105
40'	2010.2	342.4	E	40'	2591.0	558.6	E	40'	3219.7	842.7	E
50'	2019.6	345.5	.117	50'	2601.1	562.8	.189	50'	3230.7	848.1	.283
39°	2029.0	348.6		49°	2611.2						

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=70°	I	T	E	I=80°	I	T	E	I=90°
61°	3375.0	920.2	+	71°	4086.9	1308.2	+	81°	4893.6	1805.3	+
10'	3386.3	925.9		10'	4099.5	1315.6		10'	4903.0	1814.7	
20'	3397.5	931.6	5° C.	20'	4112.1	1322.9	5° C.	20'	4922.5	1824.1	5° C.
30'	3408.8	937.3	T	30'	4124.8	1330.3	T	30'	4937.0	1833.6	T
40'	3420.1	943.1	E	40'	4137.4	1337.7	E	40'	4951.5	1843.1	E
50'	3431.4	948.9	.25	50'	4150.1	1345.1	.30	50'	4966.1	1852.6	.36
62°	3442.7	954.8	.080	72°	4162.8	1352.6	.110	82°	4980.7	1862.2	.149
10'	3454.1	960.6		10'	4175.6	1360.1		10'	4995.4	1871.8	
20'	3465.4	966.5		20'	4188.5	1367.6		20'	5010.0	1881.5	
30'	3476.8	972.4		30'	4201.2	1375.2		30'	5024.8	1891.2	
40'	3488.3	978.3		40'	4214.0	1382.8		40'	5039.5	1900.9	
50'	3499.7	984.3		50'	4226.8	1390.4		50'	5054.3	1910.7	
63°	3511.1	990.2	10° C.	73°	4239.7	1398.0	10° C.	83°	5069.2	1920.5	10° C.
10'	3522.6	996.2	T	10'	4252.6	1405.7	T	10'	5084.0	1930.4	T
20'	3534.1	1002.3	.51	20'	4265.6	1413.5	.61	20'	5099.0	1940.3	.72
30'	3545.6	1008.3	E	30'	4278.5	1421.2	E	30'	5113.9	1950.3	E
40'	3557.2	1014.4	.159	40'	4291.5	1429.0	.220	40'	5128.9	1960.2	.299
50'	3568.7	1020.5		50'	4304.6	1436.8		50'	5143.9	1970.3	
64°	3580.3	1026.6		74°	4317.6	1444.6		84°	5159.0	1980.4	
10'	3591.9	1032.8		10'	4330.7	1452.5		10'	5174.1	1990.5	
20'	3603.5	1039.0		20'	4343.8	1460.4		20'	5189.3	2000.6	
30'	3615.1	1045.2		30'	4356.9	1468.4		30'	5204.4	2010.8	
40'	3626.8	1051.4		40'	4370.1	1476.4		40'	5219.7	2021.1	
50'	3638.5	1057.7	15° C.	50'	4383.3	1484.4	15° C.	50'	5234.9	2031.4	15° C.
65°	3650.2	1063.9	T	75°	4396.5	1492.4	T	85°	5250.3	2041.7	T
10'	3661.9	1070.2	.76	10'	4409.8	1500.5	.91	10'	5265.6	2052.1	1.09
20'	3673.7	1076.6	E	20'	4423.1	1508.6	E	20'	5281.0	2062.5	E
30'	3685.4	1082.9	.240	30'	4436.4	1516.7	.332	30'	5296.4	2073.0	.450
40'	3697.2	1089.3		40'	4449.7	1524.9		40'	5311.9	2083.5	
50'	3709.0	1095.7		50'	4463.1	1533.1		50'	5327.4	2094.1	
66°	3720.9	1102.2		76°	4476.5	1541.4		86°	5343.0	2104.7	
10'	3732.7	1108.6		10'	4489.9	1549.7		10'	5358.6	2115.3	
20'	3744.6	1115.1		20'	4503.4	1558.0		20'	5374.2	2126.0	
30'	3756.5	1121.7	20° C.	30'	4516.9	1566.3	20° C.	30'	5389.9	2136.7	20° C.
40'	3768.5	1128.2	T	40'	4530.4	1574.7	T	40'	5405.6	2147.5	T
50'	3780.4	1134.8	1.02	50'	4544.0	1583.1	1.22	50'	5421.4	2158.4	1.45
67°	3792.4	1141.4	E	77°	4557.6	1591.6	E	87°	5437.2	2169.2	E
10'	3804.4	1148.0	.321	10'	4571.2	1600.1	.445	10'	5453.1	2180.2	.603
20'	3816.4	1154.7		20'	4584.8	1608.6		20'	5469.0	2191.1	
30'	3828.4	1161.3		30'	4598.5	1617.1		30'	5484.9	2202.2	
40'	3840.5	1168.1		40'	4612.2	1625.7		40'	5500.9	2213.2	
50'	3852.6	1174.8		50'	4626.0	1634.4		50'	5517.0	2224.3	
68°	3864.7	1181.6		78°	4639.8	1643.0		88°	5533.1	2235.5	
10'	3876.8	1188.4	25° C.	10'	4653.6	1651.7	25° C.	10'	5549.2	2246.7	25° C.
20'	3889.0	1195.2	T	20'	4667.4	1660.5	T	20'	5565.4	2258.0	T
30'	3901.2	1202.0	E	30'	4681.3	1669.2	E	30'	5581.6	2269.3	E
40'	3913.4	1208.9	.128	40'	4695.2	1678.1	.153	40'	5597.8	2280.6	.183
50'	3925.6	1215.8	.403	50'	4709.2	1686.9	.558	50'	5614.2	2292.0	.756
69°	3937.9	1222.7		79°	4723.2	1695.8		89°	5630.5	2303.5	
10'	3950.2	1229.7		10'	4737.2	1704.7		10'	5646.9	2315.0	
20'	3962.5	1236.7		20'	4751.2	1713.7		20'	5663.4	2326.6	
30'	3974.8	1243.7		30'	4765.3	1722.7		30'	5679.9	2338.2	
40'	3987.2	1250.8		40'	4779.4	1731.7		40'	5696.4	2349.8	
50'	3999.5	1257.9		50'	4793.6	1740.8		50'	5713.0	2361.5	
70°	4011.9	1265.0	30° C.	80°	4807.7	1749.9	30° C.	90°	5729.7	2373.3	30° C.
10'	4024.4	1272.1	T	10'	4822.0	1759.0	T	10'	5746.3	2385.1	T
20'	4036.8	1279.3	1.54	20'	4836.2	1768.2	1.84	20'	5763.1	2397.0	2.20
30'	4049.3	1286.5	E	30'	4850.5	1777.4	E	30'	5779.9	2408.9	E
40'	4061.8	1293.6	.485	40'	4864.8	1786.7	.671	40'	5796.7	2420.9	.910
50'	4074.4	1300.9		50'	4879.2	1796.0		50'	5813.6	2432.9	

T = R tan ½ I

E = R exsec ½ I

TABLE IX. TANGENTS AND EXTERNALS TO A 1° CURVE

I	T	E	I=100°	I	T	E	I=110°	I	T	E	I=120°
91°	5830.5	2444.9	+	101°	6950.6	3278.1	+	111°	8336.7	4386.1	+
10'	5847.5	2457.1		10'	6971.3	3294.1		10'	8362.7	4407.6	
20'	5864.6	2469.3	5° C.	20'	6992.0	3310.1	5° C.	20'	8388.9	4429.2	5° C.
30'	5881.7	2481.5	T	30'	7012.7	3326.1	T	30'	8415.1	4450.9	T
40'	5898.8	2493.8	.43	40'	7033.6	3342.3	.51	40'	8441.5	4472.7	.62
50'	5916.0	2506.1	.E	50'	7054.5	3358.5	.E	50'	8468.0	4494.6	.E
92°	5933.2	2518.5	.200	102°	7075.5	3374.9	.268	112°	8494.6	4516.6	.360
10'	5950.5	2531.0		10'	7096.6	3391.2		10'	8521.3	4538.8	
20'	5967.9	2543.5		20'	7117.8	3407.7		20'	8548.1	4561.1	
30'	5985.3	2556.0		30'	7139.0	3424.3		30'	8575.0	4583.4	
40'	6002.7	2568.6		40'	7160.3	3440.9		40'	8602.1	4606.0	
50'	6020.2	2581.3		50'	7181.7	3457.6		50'	8629.3	4628.6	
93°	6037.8	2594.0	10° C.	103°	7203.2	3474.4	10° C.	113°	8656.6	4651.3	10° C.
10'	6055.4	2606.8	T	10'	7224.7	3491.3	T	10'	8684.0	4674.2	T
20'	6073.1	2619.7	.86	20'	7246.3	3508.2	.103	20'	8711.5	4697.2	1.25
30'	6090.8	2632.6	E	30'	7268.0	3525.2	F	30'	8739.2	4720.3	E
40'	6108.6	2645.5	.401	40'	7289.8	3542.4	.536	40'	8767.0	4743.6	.721
50'	6126.4	2658.5		50'	7311.7	3559.6		50'	8794.9	4766.9	
94°	6144.3	2671.6		104°	7333.6	3576.8		114°	8822.9	4790.4	
10'	6162.2	2684.7		10'	7355.6	3594.2		10'	8851.0	4814.1	
20'	6180.2	2697.9		20'	7377.8	3611.7		20'	8879.3	4837.8	
30'	6198.3	2711.2		30'	7399.9	3629.2		30'	8907.7	4861.7	
40'	6216.4	2724.5		40'	7422.2	3646.8		40'	8936.3	4885.7	
50'	6234.6	2737.9	15° C.	50'	7444.6	3664.5	15° C.	50'	8965.0	4909.9	15° C.
95°	6252.8	2751.3	T	105°	7467.0	3682.3	T	115°	8993.8	4934.1	T
10'	6271.1	2764.8	1.30	10'	7489.6	3700.2	1.56	10'	9022.7	4958.6	1.93
20'	6289.4	2778.3	E	20'	7512.2	3718.2	E	20'	9051.7	4983.1	E
30'	6307.9	2792.0	.604	30'	7534.9	3736.2	.806	30'	9080.9	5007.8	1.09
40'	6326.3	2805.6		40'	7557.7	3754.4		40'	9110.3	5032.6	
50'	6344.8	2819.4		50'	7580.5	3772.6		50'	9139.8	5057.6	
96°	6363.4	2833.2		106°	7603.5	3791.0		116°	9169.4	5082.7	
10'	6382.1	2847.0		10'	7626.6	3809.4		10'	9199.1	5107.9	
20'	6400.8	2861.0		20'	7649.7	3827.9		20'	9229.0	5133.3	
30'	6419.5	2875.0	20° C.	30'	7672.9	3846.5	20° C.	30'	9259.0	5158.8	20° C.
40'	6438.4	2889.0	T	40'	7696.3	3865.2	T	40'	9289.2	5184.5	T
50'	6457.3	2903.1	1.74	50'	7719.7	3884.0	2.08	50'	9319.5	5210.3	2.52
97°	6476.2	2917.3	E	107°	7743.2	3902.9	E	117°	9349.9	5236.2	E
10'	6495.2	2931.6	.809	10'	7766.8	3921.9	1.08	10'	9380.5	5262.3	1.46
20'	6514.3	2945.9		20'	7790.5	3940.9		20'	9411.3	5288.6	
30'	6533.4	2960.3		30'	7814.3	3960.1		30'	9442.2	5315.0	
40'	6552.6	2974.7		40'	7838.1	3979.4		40'	9473.2	5341.5	
50'	6571.9	2989.2		50'	7862.1	3998.7		50'	9504.4	5368.2	
98°	6591.2	3003.8		108°	7886.2	4018.2		118°	9535.7	5395.1	
10'	6610.6	3018.4	25° C.	10'	7910.4	4037.8	25° C.	10'	9567.2	5422.0	25° C.
20'	6630.1	3033.3	T	20'	7934.6	4057.4	T	20'	9598.9	5449.2	T
30'	6649.6	3047.9	E	30'	7959.0	4077.2	E	30'	9630.7	5476.5	E
40'	6669.2	3062.8	2.18	40'							

TABLE X.  
MIDDLE ORDINATES OF RAILS  
Length of Rail (feet)

C	R	30	28	26	24	22	20	C	R	30	28	26	24	22	20
o /	Feet	Inch	Inch	Inch	Inch	Inch	Inch	o	Feet	Inch	Inch	Inch	Inch	Inch	Inch
0-20	17189	.08	.07	.06	.05	.04	.03	8	716.8	1.88	1.64	1.42	1.20	1.01	.84
0-40	8594	.16	.14	.12	.10	.08	.07	9	637.3	2.12	1.84	1.60	1.35	1.14	.94
1-0	5730	.24	.20	.18	.15	.13	.10	10	573.7	2.36	2.05	1.78	1.50	1.27	1.04
1-20	4297	.31	.27	.23	.20	.17	.13	11	521.7	2.59	2.26	1.95	1.65	1.39	1.15
1-40	3438	.39	.34	.29	.25	.21	.17	12	478.3	3.83	3.47	2.15	1.81	1.54	1.26
2-0	2865	.47	.41	.35	.30	.25	.20	13	441.7	3.05	2.66	2.30	1.96	1.66	1.36
2-20	2456	.55	.48	.41	.35	.29	.23	14	410.3	3.30	2.87	2.48	2.10	1.78	1.46
2-40	2149	.63	.55	.47	.40	.33	.27	15	383.1	3.54	3.08	2.68	2.26	1.91	1.57
3-0	1910	.71	.62	.53	.45	.38	.31	16	359.3	3.76	3.28	2.83	2.40	2.04	1.67
3-20	1719	.78	.68	.59	.50	.42	.35	17	338.3	4.00	3.48	3.02	2.57	2.16	1.78
3-40	1563	.86	.75	.65	.55	.46	.38	18	319.6	4.21	3.67	3.18	2.70	2.28	1.87
4-0	1433	.94	.82	.71	.60	.50	.42	19	302.9	4.45	3.89	3.36	2.86	2.41	1.98
4-20	1323	1.02	.89	.77	.65	.55	.45	20	287.9	4.70	4.09	3.55	3.00	2.54	2.09
4-40	1228	1.10	.96	.83	.70	.59	.48	22	262.0	5.16	4.44	3.84	3.30	2.80	2.29
5	1146	1.18	1.03	.89	.75	.63	.52	24	240.5	5.64	4.92	4.20	3.59	3.04	2.50
6	955.3	1.41	1.23	1.06	.90	.76	.62	26	222.3	6.07	5.29	4.58	3.88	3.29	2.70
7	819.0	1.65	1.44	1.24	1.05	.89	.73								

TABLE XI.  
SHORT RADIUS CURVES

Radius Feet	Chord Feet	Central Angle	Deflection Angle	Deflection for 1 Foot
35	10	16-26	8-13	49.3
45	10	12-46	6-23	38.3
50	15	17-16	8-38	34.5
60	15	14-22	7-11	28.8
75	15	11-30	5-45	23.0
100	20	11-30	5-45	17.3
120	20	9-34	4-47	14.3
150	20	7-39	3-49	11.5
190	25	7-32	3-46	9.15
200	25	7-10	3-35	8.6
225	25	6-25	3-12	7.7
240	25	5-58	2-59	7.2
250	25	5-44	2-52	6.9
275	25	5-12	2-36	6.2
288	50	9-58	4-59	6.0
300	50	9-32	4-46	5.7
350	50	8-12	4-06	4.9
376	50	7-40	3-50	4.6
400	50	7-10	3-35	4.3
410	50	7-00	3-30	4.2

To find length of curve divide angle from P. C. to P. T. by central angle of chord, and multiply by length of chord.


TABLE XII.  
INCLINED DISTANCE OF 100 FT. REDUCED TO HORIZONTAL

Slope	Horizontal Distance	Correction	Rise	Slope	Horizontal Distance	Correction	Rise
0°00'	100.000	0.000	0.000	8°00'	99.027	0.973	0.139
15'	99.999	0.001	0.004	15'	98.965	1.035	0.143
30'	99.996	0.004	0.009	30'	98.902	1.098	0.148
45'	99.991	0.009	0.013	45'	98.836	1.164	0.152
1 00	99.985	0.015	0.017	9 00	98.769	1.231	0.156
15	99.976	0.024	0.022	15	98.700	1.300	0.161
30	99.966	0.034	0.026	30	98.629	1.371	0.165
45	99.953	0.047	0.031	45	98.556	1.444	0.169
2 00	99.939	0.061	0.035	10 00	98.481	1.519	0.174
15	99.923	0.077	0.039	15	98.404	1.596	0.178
30	99.905	0.095	0.044	30	98.325	1.675	0.182
45	99.885	0.115	0.048	45	98.245	1.755	0.187
3 00	99.863	0.137	0.052	11 00	98.163	1.837	0.191
15	99.839	0.161	0.057	15	98.079	1.921	0.195
30	99.813	0.187	0.061	30	97.992	2.008	0.199
45	99.786	0.214	0.065	45	97.905	2.095	0.204
4 00	99.756	0.244	0.070	12 00	97.815	2.185	0.208
15	99.725	0.275	0.074	15	97.723	2.277	0.212
30	99.692	0.308	0.078	30	97.630	2.370	0.216
45	99.657	0.343	0.083	45	97.534	2.466	0.221
5 00	99.619	0.381	0.087	13 00	97.437	2.563	0.225
15	99.580	0.420	0.092	15	97.338	2.662	0.229
30	99.540	0.460	0.096	30	97.237	2.763	0.233
45	99.497	0.503	0.100	45	97.134	2.866	0.238
6 00	99.452	0.548	0.105	14 00	97.030	2.970	0.242
15	99.406	0.594	0.109	15	96.923	3.077	0.246
30	99.357	0.643	0.113	30	96.815	3.185	0.250
45	99.307	0.693	0.118	45	96.705	3.295	0.255
7 00	99.255	0.745	0.122	15 00	96.593	3.407	0.259
15	99.200	0.800	0.126	15	96.479	3.521	0.263
30	99.144	0.856	0.131	30	96.363	3.637	0.267
45	99.087	0.913	0.135	45	96.246	3.754	0.271

For each foot take one one-hundredth of each reading.

TABLE XIII.  
MINUTES IN DECIMALS OF A DEGREE.

0 30"	.00833	10 30"	.17500	20 30"	.34167	30 10"	.50833	40 30"	.67500	50 10"	.84167
1 00	.01667	11 00	.18333	21 00	.35000	31 00	.51667	41 00	.68333	51 00	.85000
30	.02500	30	.19167	30	.35833	30	.52500	30	.69167	30	.85833
2 00	.03333	12 00	.20000	22 00	.36667	32 00	.53333	42 00	.70000	52 00	.86667
30	.04167	30	.20833	30	.37500	30	.54167	30	.70833	30	.87500
3 00	.05000	13 00	.21667	23 00	.38333	33 00	.55000	43 00	.71667	53 00	.88333
30	.05833	30	.22500	30	.39167	30	.55833	30	.72500	30	.89167
4 00	.06667	14 00	.23333	24 00	.40000	34 00	.56667	44 00	.73333	54 00	.90000
30	.07500	30	.24167	30	.40833	30	.57500	30	.74167	30	.90833
5 00	.08333	15 00	.25000	25 00	.41667	35 00	.58333	45 00	.75000	55 00	.91667
30	.09167	30	.25833	30	.42500	30	.59167	30	.75833	30	.92500
6 00	.10000	16 00	.26667	26 00	.43333	36 00	.60000	46 00	.76667	56 00	.93333
30	.10833	30	.27500	30	.44167	30	.60833	30	.77500	30	.94167
7 00	.11667	17 00	.28333	27 00	.45000	37 00	.61667	47 00	.78333	57 00	.95000
30	.12500	30	.29167	30	.45833	30	.62500	30	.79167	30	.95833
8 00	.13333	18 00	.30000	28 00	.46667	38 00	.63333	48 00	.80000	58 00	.96667
30	.14167	30	.30833	30	.47500	30	.64167	30	.80833	30	.97500
9 00	.15000	19 00	.31667	29 00	.48333	39 00	.65000	49 00	.81667	59 00	.98333
30	.15833	30	.32500	30	.49167	30	.65833	30	.82500	30	.99167
10 00	.16667	20 00	.33333	30 00	.50000	40 00	.66667	50 00	.83333	60 00	1.00000

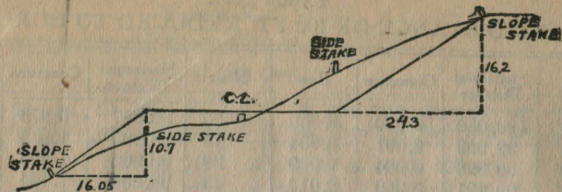

DISTANCES FROM SIDE STAKES FOR CROSS-SECTIONING.

SLOPE  $1\frac{1}{2}$  TO 1. ROADWAY OF ANY WIDTH.

	0	.1	.2	.3	.4	.5	.6	.7	.8	.9	
0	0.00	0.15	0.30	0.45	0.60	0.75	0.90	1.05	1.20	1.35	0
1	1.50	1.65	1.80	1.95	2.10	2.25	2.40	2.55	2.70	2.85	1
2	3.00	3.15	3.30	3.45	3.60	3.75	3.90	4.05	4.20	4.35	2
3	4.50	4.65	4.80	4.95	5.10	5.25	5.40	5.55	5.70	5.85	3
4	6.00	6.15	6.30	6.45	6.60	6.75	6.90	7.05	7.20	7.35	4
5	7.50	7.65	7.80	7.95	8.10	8.25	8.40	8.55	8.70	8.85	5
6	9.00	9.15	9.30	9.45	9.60	9.75	9.90	10.05	10.20	10.35	6
7	10.50	10.65	10.80	10.95	11.10	11.25	11.40	11.55	11.70	11.85	7
8	12.00	12.15	12.30	12.45	12.60	12.75	12.90	13.05	13.20	13.35	8
9	13.50	13.65	13.80	13.95	14.10	14.25	14.40	14.55	14.70	14.85	9
10	15.00	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	10
11	16.50	16.65	16.80	16.95	17.10	17.25	17.40	17.55	17.70	17.85	11
12	18.00	18.15	18.30	18.45	18.60	18.75	18.90	19.05	19.20	19.35	12
13	19.50	19.65	19.80	19.95	20.10	20.25	20.40	20.55	20.70	20.85	13
14	21.00	21.15	21.30	21.45	21.60	21.75	21.90	22.05	22.20	22.35	14
15	22.50	22.65	22.80	22.95	23.10	23.25	23.40	23.55	23.70	23.85	15
16	24.00	24.15	24.30	24.45	24.60	24.75	24.90	25.05	25.20	25.35	16
17	25.50	25.65	25.80	25.95	26.10	26.25	26.40	26.55	26.70	26.85	17
18	27.00	27.15	27.30	27.45	27.60	27.75	27.90	28.05	28.20	28.35	18
19	28.50	28.65	28.80	28.95	29.10	29.25	29.40	29.55	29.70	29.85	19
20	30.00	30.15	30.30	30.45	30.60	30.75	30.90	31.05	31.20	31.35	20
21	31.50	31.65	31.80	31.95	32.10	32.25	32.40	32.55	32.70	32.85	21
22	33.00	33.15	33.30	33.45	33.60	33.75	33.90	34.05	34.20	34.35	22
23	34.50	34.65	34.80	34.95	35.10	35.25	35.40	35.55	35.70	35.85	23
24	36.00	36.15	36.30	36.45	36.60	36.75	36.90	37.05	37.20	37.35	24
25	37.50	37.65	37.80	37.95	38.10	38.25	38.40	38.55	38.70	38.85	25
26	39.00	39.15	39.30	39.45	39.60	39.75	39.90	40.05	40.20	40.35	26
27	40.50	40.65	40.80	40.95	41.10	41.25	41.40	41.55	41.70	41.85	27
28	42.00	42.15	42.30	42.45	42.60	42.75	42.90	43.05	43.20	43.35	28
29	43.50	43.65	43.80	43.95	44.10	44.25	44.40	44.55	44.70	44.85	29
30	45.00	45.15	45.30	45.45	45.60	45.75	45.90	46.05	46.20	46.35	30
31	46.50	46.65	46.80	46.95	47.10	47.25	47.40	47.55	47.70	47.85	31
32	48.00	48.15	48.30	48.45	48.60	48.75	48.90	49.05	49.20	49.35	32
33	49.50	49.65	49.80	49.95	50.10	50.25	50.40	50.55	50.70	50.85	33
34	51.00	51.15	51.30	51.45	51.60	51.75	51.90	52.05	52.20	52.35	34
35	52.50	52.65	52.80	52.95	53.10	53.25	53.40	53.55	53.70	53.85	35
36	54.00	54.15	54.30	54.45	54.60	54.75	54.90	55.05	55.20	55.35	36
37	55.50	55.65	55.80	55.95	56.10	56.25	56.40	56.55	56.70	56.85	37
38	57.00	57.15	57.30	57.45	57.60	57.75	57.90	58.05	58.20	58.35	38
39	58.50	58.65	58.80	58.95	59.10	59.25	59.40	59.55	59.70	59.85	39
40	60.00	60.15	60.30	60.45	60.60	60.75	60.90	61.05	61.20	61.35	40
41	61.50	61.65	61.80	61.95	62.10	62.25	62.40	62.55	62.70	62.85	41
42	63.00	63.15	63.30	63.45	63.60	63.75	63.90	64.05	64.20	64.35	42
43	64.50	64.65	64.80	64.95	65.10	65.25	65.40	65.55	65.70	65.85	43
44	66.00	66.15	66.30	66.45	66.60	66.75	66.90	67.05	67.20	67.35	44
45	67.50	67.65	67.80	67.95	68.10	68.25	68.40	68.55	68.70	68.85	45
46	69.00	69.15	69.30	69.45	69.60	69.75	69.90	70.05	70.20	70.35	46
47	70.50	70.65	70.80	70.95	71.10	71.25	71.40	71.55	71.70	71.85	47
48	72.00	72.15	72.30	72.45	72.60	72.75	72.90	73.05	73.20	73.35	48
49	73.50	73.65	73.80	73.95	74.10	74.25	74.40	74.55	74.70	74.85	49
50	75.00	75.15	75.30	75.45	75.60	75.75	75.90	76.05	76.20	76.35	50

Computed by L. Leland Locke.

PLEASE RETURN TO  
 GAUGA COUNTY ENGINEER  
 COURT HOUSE  
 CHARDON, O.  
 PHONE 250-X


TABLE OF INCHES REDUCED TO DECIMALS OF A FOOT.

Inches	Decimals	Inches	Decimals	Inches	Decimals	Inches	Decimals	Inches	Decimals	Inches	Decimals
1	.0000	11	.8750	21	.8500	31	.8250	41	.8000	51	.7750
2	.0000	12	.8833	22	.8583	32	.8333	42	.8083	52	.7833
3	.0000	13	.8917	23	.8667	33	.8417	43	.8167	53	.7917
4	.0000	14	.9000	24	.8750	34	.8500	44	.8250	54	.8000
5	.0000	15	.9083	25	.8833	35	.8583	45	.8333	55	.8083
6	.0000	16	.9167	26	.8917	36	.8667	46	.8417	56	.8167
7	.0000	17	.9250	27	.9000	37	.8750	47	.8500	57	.8250
8	.0000	18	.9333	28	.9083	38	.8833	48	.8583	58	.8333
9	.0000	19	.9417	29	.9167	39	.8917	49	.8667	59	.8417
10	.0000	20	.9500	30	.9250	40	.9000	50	.8750	60	.8500
11	.0000	30	.9583	40	.9333	50	.9083	60	.8833	70	.8583
12	.0000	31	.9667	41	.9417	51	.9167	61	.8917	71	.8667
13	.0000	32	.9750	42	.9500	52	.9250	62	.9000	72	.8750
14	.0000	33	.9833	43	.9583	53	.9333	63	.9083	73	.8833
15	.0000	34	.9917	44	.9667	54	.9417	64	.9167	74	.8917
16	.0000	35	.0000	45	.9750	55	.9500	65	.9250	75	.9000
17	.0000	36	.0000	46	.9833	56	.9583	66	.9333	76	.9083
18	.0000	37	.0000	47	.9917	57	.9667	67	.9417	77	.9167
19	.0000	38	.0000	48	.0000	58	.9750	68	.9500	78	.9250
20	.0000	39	.0000	49	.0000	59	.9833	69	.9583	79	.9333
21	.0000	40	.0000	50	.0000	60	.9917	70	.9667	80	.9417
22	.0000	41	.0000	51	.0000	61	.0000	71	.9750	81	.9500
23	.0000	42	.0000	52	.0000	62	.0000	72	.9833	82	.9583
24	.0000	43	.0000	53	.0000	63	.0000	73	.9917	83	.9667
25	.0000	44	.0000	54	.0000	64	.0000	74	.0000	84	.9750
26	.0000	45	.0000	55	.0000	65	.0000	75	.0000	85	.9833
27	.0000	46	.0000	56	.0000	66	.0000	76	.0000	86	.9917
28	.0000	47	.0000	57	.0000	67	.0000	77	.0000	87	.0000
29	.0000	48	.0000	58	.0000	68	.0000	78	.0000	88	.0000
30	.0000	49	.0000	59	.0000	69	.0000	79	.0000	89	.0000
31	.0000	50	.0000	60	.0000	70	.0000	80	.0000	90	.0000
32	.0000	51	.0000	61	.0000	71	.0000	81	.0000	91	.0000
33	.0000	52	.0000	62	.0000	72	.0000	82	.0000	92	.0000
34	.0000	53	.0000	63	.0000	73	.0000	83	.0000	93	.0000
35	.0000	54	.0000	64	.0000	74	.0000	84	.0000	94	.0000
36	.0000	55	.0000	65	.0000	75	.0000	85	.0000	95	.0000
37	.0000	56	.0000	66	.0000	76	.0000	86	.0000	96	.0000
38	.0000	57	.0000	67	.0000	77	.0000	87	.0000	97	.0000
39	.0000	58	.0000	68	.0000	78	.0000	88	.0000	98	.0000
40	.0000	59	.0000	69	.0000	79	.0000	89	.0000	99	.0000
41	.0000	60	.0000	70	.0000	80	.0000	90	.0000	100	.0000

B. K. ELLIOTT COMPANY, PITTSBURG, PA.  
 DRAWING MATERIALS AND SURVEYING INSTRUMENTS

123+66.8  
 134+37.2

5572  
 83 37  
 12 25  
 10884



3572  
 5125  
 4470  
 70.2  
 51+24  
 43+37  
 7+87.44

1661.27  
 2.49  
 10.642.8  
 12.03  
 10.37.83  
 3.17  
 10.37.00  
 3.35  
 10.37.00  
 4.07  
 10.37.00

12  
 1661.27  
 2.49  
 10.642.8  
 12.03  
 10.37.83  
 3.17  
 10.37.00  
 3.35  
 10.37.00  
 4.07  
 10.37.00

MARTIN DRANKER

135+0  
 62 86  
 72+14

90-00  
 05-53  
 84-07  
 174 59 60  
 104-31-40  
 75 28 20

134  
 0.3

